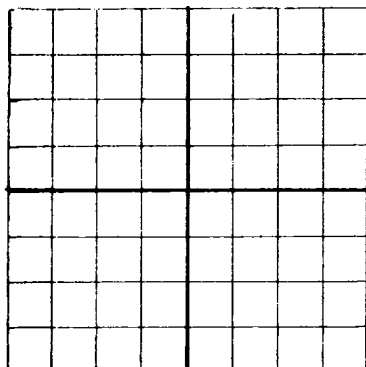


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Green Bay Co & Dominion Oil & Gas Co. Roswell, New Mexico
Company or Operator Address
State Well No. 1 in NW NE of Sec. 2, T. 17
Lease
R. 31, N. M. P. M., Robinson Field, Eddy County.
Well is 330 feet south of the North line and 1980 feet west of the East line of Section 2
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is Address
Drilling commenced December 31, 1940 Drilling was completed March 12, 1941
Name of drilling contractor Brewer Drilling Co., Address Artesia, New Mexico
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until Nil 19

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to
No. 2, from 3563 to 3605 No. 5, from to
No. 3, from 3555 to 3575 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 2973 to 3010 feet. 37 red sand
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 1/2	28	8	Wheeling	867	Reg				Salt string
7	20 OD	8	"	3250-5	Reg				Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10	8 1/2	867	50	Halliburton	none	none
8	7	3250-5	100	#		5 tons

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		None				

Results of shooting or chemical treatment None

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 4005 feet, and from feet to feet

PRODUCTION

Put to producing Dry, 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Ba
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Truman Jacobs, Driller O. C. Bean, Driller
W. I. Owen, Driller A. E. Early, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 19

Roswell, New Mexico 3-19-41
Place Date

day of March, 1941

Name F. B. Knox

SEAL

Position Contractor

Norma Belle

Notary Public

Representing Brewer Drilling Co.
Company or Operator

My Commission expires November 1943

Address Box 566, Artesia, New Mexico

