


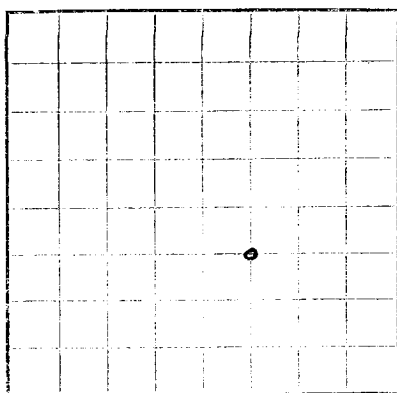

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

JAN 24 1955

ARIZONA, NEW MEXICO

LOG OF OIL OR GAS WELL

Company Sinclair Oil & Gas Company Address 520 East Broadway, Hobbs, New Mexico
Lessor or Tract H. E. West "A" Field Grayburg-Jackson State New Mexico
Well No. 5 Sec. 4 T. 17 SR. 31 Meridian Eddy County Eddy
Location 1980 ft. N. of South line and 1980 ft. W. of East line of NW 1/4 SE 1/4 Sec. 4 Elevation 3926'
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon
so far as can be determined from all available records.

Signed 66-1011Date January 19, 1955Title Dist. Supt.

The summary on this page is for the condition of the well at above date.

Commenced drilling 12:Midnight 10/20, 1954 Finished drilling 8:AM 12/23, 1954

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 3276 to 3281 No. 4, from _____ to _____
No. 2, from 3383 to 3390 No. 5, from _____ to _____
No. 3, from 3515 to 3522 No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from None to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8 5/8"	24#	8r (F2 J55 ss)	693'	Larkin					No perforations.
7"	20#	8r (F2 J55 ss)	3169'	"					Open Hole.
2"	1.75	8r (F2 J55 ss)	3398'						

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8 5/8"	695'	100 Sacks	Halliburton		
7"	3169'	200 Sacks	"		
2"	3398'				

PLUGS AND ADAPTERS

Heaving plug—Material None Length _____ Depth set _____
Adapters—Material None Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
None						

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from Surface feet to 3650' TD. feet, and from _____ feet to _____ feet

January 19, 1955 Put to producing _____, 19____
The production for the first 24 hours was 43 barrels of fluid of which 54% was oil; _____%
emulsion; _____% water; and _____% sediment. Gravity, °Bé. 100

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas 35Rock pressure, lbs. per sq. in. None

EMPLOYEES

_____, Driller _____, Driller
Mr. Erarts _____, Driller Carl Davis
Mr. Flemming _____, Driller Mr. Bylor

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	495	495	Sand & Redbed
495	690	195	Anhydrite
690	1730	1040	Salt
1730	2735	1005	Anhydrite
2735	2775	40	Anhydrite & Red Sand
2775	3150	375	Anhydrite
3150	3487	337	Gray Lime
3487	3548	61	White Lime
3548	3650 TD.	102	Gray Lime

[illegible]

HISTORY OF OIL OR GAS WELL

16-43094-2 U. S. GOVERNMENT PRINTING OFFICE