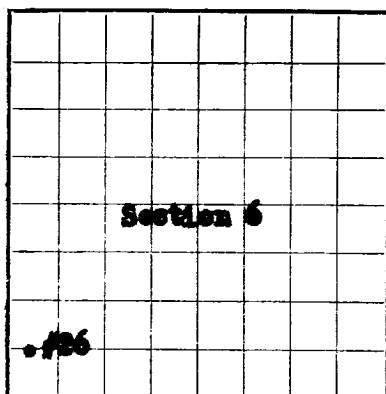


U. S. LAND OFFICE Las Cruces
SERIAL NUMBER 027435 (b)
LEASE OR PERMIT TO PROSPECT

LOCATE WELL CORRECTLY

U. S. Cons. Comm.
ARTS & MINESUNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company Sinclair Oil & Gas Company Address 520 E. Broadway, Hobbs, New Mexico
Lessor or Tract J. L. Keel "B" Field Grayburg Jackson State New Mexico
Well No. 26 Sec. 6 T17S R. 31E Meridian County ddy
Location 660 ft. ^(N.) of 8 Line and 516.8 ft. ^(E.) of W Line of Section 6 Elevation 3726
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed [Signature]Date September 5, 1957 Title Dist. Supt.

The summary on this page is for the condition of the well at above date.

Commenced drilling June 19, 1957 Finished drilling August 16, 1957

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 2750 to 3069 No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS
No. 1, from 2750 to 3069 No. 3, from 3069 to 3089
No. 2, from 3089 to 3100 No. 4, from 3100 to 3110
No. 5, from 3110 to 3120 No. 6, from 3120 to 3130

CASING RECORD

Size casing	Weight per foot	Threads per foot	Make	Amount	Kind of shoe	Cut and pulled from	Perforated	Purpose
10-3/4	28.52	51.5	Armed	566				Surface
8-5/8	21.00	41.5	Armed	1200				25 sacks approx.
7	16.00	31.5	Armed	1200				
2-3/8	4.7	32	J-55	2990				Logging

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
10-3/4	566	100	Halliburton		
8-5/8	2300				25 sacks approx.
7	3420	100	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____

Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
None						

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

Cable tools were used from Surface feet to 3500 feet, and from _____ feet to _____ feet

DATES

_____ August 21, 1957 Put to producing _____ August 22, 1957

The production for the first 24 hours was 240 barrels of fluid of which 100 % was oil; 0 % emulsion; 0 % water; and 0 % sediment. Gravity, °Bé. 36.4

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Flaming, Driller Joe G. Taylor, Driller
Enslin, Driller Avian, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	75	75	Sand & Gravel
75	540	615	Redbed
540	1200	740	Salt
1200	2750	1510	Anhydrite
2750	3500	2260	Lime
3500 - Total Depth			
			GEOLOGICAL TOPS: (from Electric Log)
			Yates 1433
			Seven Rivers 1730
			Queen 2332
			Grayburg 2750
			San Andres 3066

Orig & Joe: USGS
eq: JMR, WFD, File

COPY SENT

[OVER]

COPY SENT

14-42004-8

FORMATION RECORD - CONTINUED

