At proposed prod. zone

23.

N.M.O.D. CITY-

SUBMIT IN T LICATE. er instru uns on reverse side) (Other instru

Form approved. Budget Bureau No. 42-R1425. 0-015-23166

UNITED STATES DEPARTMENT OF THE INTERIOR

3588.9 GR

1850' FSL and 1490' FWL

DEPARTMENT OF THE INTERIOR GEOLOGICAL SURVEY	5. LEASE DESIGNATION AND BERIAL NO.
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK	LC-028793-b RECEIVED
DRILL X DEEPEN D PLUG BACK	7. UNIT AGREEMENT PAR 7 1980
b. Type of well OIL X GAR BINGLE MULTIPLE SONE SONE	8. PARM OR LEASE NASS, C. D.
2. NAME OF OPERATOR	Burch B ARTESIA, OFFICE
General American Oil Company of Texas	9. WELL NO.
3. ADDRESS OF OPERATOR	#33 10. FIELD AND POOL, OR WILDCAT
P. O. Box 128, Loco Hills, New Mexico 88255 (Report location of wall (Report location clearly and in accordance with any State requirements.*) At surface	Grayburg Jackson

11. SEC., T., R., M., OR BLE. AND SURVEY OR AREA -- K

Sec. 23, T-17-S, R-29-E 12. COUNTY OR FARISH | 18. STATE

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE® 3 Miles Southwest of Loco Hills Eddy New Mexico 17. NO. OF ACRES ASSIGNED 16. NO. OF ACRES IN LEASE 10. DISTANCE FROM PROPUSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drig. unit line, if any) TO THIS WELL 40 800 1490' 19. PROPOSED DEPTH 20. ROTARY OR CABLE TOOLS 18. DISTANCE FROM PROPOSED LOCATION®
TO NEAREST WELL, DRILLING, COMPLE
OR APPLIED FOR, ON THIS LEASE, FT. COMPLETED, Rotary 3600 950'

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

22. APPROX. DATE WORK WILL START* February 6, 1980

PROPOSED CASING AND CEMENTING PROGRAM

BIZE OF HOLE	BIZE OF CABING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CRMENT
2 1 / / !!	8 5/8"	24#	500'	Circulate
7 7/9"	5 1/2"	15.5#	3600'	350 Sacks

We propose to drill this well to 3600' and complete in the Grayburg San Andres.

All zones indicating porosity will be acidized or sand fraced.

Water and native mud will be used and approximately 100' from T.D. Mud Program: we will mud up to get the hole in shape to log.

A 10" 3000# blowout preventor will be used in drilling of this well.

NSL 1145 1-29-80

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM : If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

BIGNED Sondolo N. Hawkins	TITLE Asst. Field	Superintendent Date December	<u>27, 19</u> 79
(This space for Federal or State office use)			
PERMIT NO.	APPROVAL DATE	2-6-80	
APPROVED BY	TITLE	DATE	

NEW MEXICO OIL CONSERVATION COMMISSIG.. WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102 Supersedes C-128 Effective - 65

All distances must be from the outer boundaries of the Section (perator 33 AMERICAN OIL CO. OF TEXAS GENERAL 17 South 29 East Eddy Actual Footage Location of Well: teet from the South Producing Formation. iround . evel Elev. Grayburg-Jackson San Andres 3588.9 1. Outline the acreage dedicated to the subject well RECENED pencil or hachure marks on the plat below 2. If more than one lease is dedicated to the well outling oppound identify the ownership thereof (both as to working interest and royalty) interest and royalty). 3. If more than one lease of different ownership is defleated to the well, have the well, have the well of the wel dated by communitization, unitization, force-pool ARTESUS OFFICE If answer is "yes," type of consolidation _ If answer is "no," list the owners and tract descriptions which have actually No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commis-Endell M. Wawkins Lendell N. Hawkins Assistant Field Superintendent General American Oil Co. of Texas December 26, 1979 1490' ---December 17, 1979



N.M.O.C.D. COPY United States Department of the Interior

RECEIVED

GEOLOGICAL SURVEY

P. O. Drawer U Artesia, New Mexico 88210 FEB 7 1980

O. C. D.

ARTESIA, OFFICE

February 6, 1980

General American Oil Co of Tex P. O. Box 128
Loco Hills, New Mexico 88255

GENERAL AMERICAN OIL CO OF TEXAS
Burch B No. 33

1850 FSL 1490 FWL Sec. 23 T.17S R.29E
Eddy County Lease No. LC 028793-b

Gentlemen:

Above Data Required on Well Sign

Your APPLICATION FOR PERMIT TO DRILL the above-described well to a depth of 3,600 feet to test the San Andres is hereby approved subject to compliance with the OIL AND GAS OPERATING REGULATIONS (30 CFR 221) and the following conditions:

- 1. Drilling operations authorized are subject to compliance with the attached General Requirements for Oil and Gas Operations on Federal Leases, dated July 1, 1978.
- 2. Prior to commencing construction of road, pad, or other associated developments, operator will provide the dirt contractor with a copy of the Surface Use Plan and these Conditions of Approval including the attached General Requirements.
- 3. Submit a Daily Report of Operations from spud date until the well is completed and the Well Completion Report (form 9-330) is filed. The report should not be less than 8" x 5" in size and each page should identify the well.
- 4. All permanent above-ground structures and equipment shall be painted in accordance with the attached Painting Guidelines. The color used should simulate Sandstone Brown (Federal Standard No. 595A, color 20318 or 30318).
- 5. Cement behind the 8-5/8" casing must be circulated.
- 6. Special stipulations: Utilize caliche pit in SW/4 SE/4 Sec. 23, T.17S., R.29E. Use existing pipeline due south of location for access road, (BLM).
- 7. Please have anyone contacting the Survey in regard to this well to identify the well with all of the information required above for the well sign.

WIE BICAN A WELL OF THE PROPERTY OF THE PROPER

Sincerely yours,

George H. Stewart Acting District Engineer

I. Objective:

Drill 3 infill wells in the Grayburg Jackson Field, Eddy Co., New Mexico. Two of these wells will continue the infill pattern on 20 acre spacing as already established. The other well will be located inside the Grayburg Keely Unit area to develope Grayburg and San Andres production which can not be combined with Keely zone production.

II. Location:

Wells to be located as follows:

Burch C #42 1295' FNL & 1295' FEL Sec. 30-175-30E

Burch C #43 1345' FSL & 1345' FEL Sec. 18-175-30E

Burch B #33 1850' FSL & 1490' FWL Sec. 23-175-29E

111. Budget Classification:

Developmental Drilling.

IV. Projected Total Depth, Hole Size, Slope Test:

- A. 124" hole to the top of the salt to accommodate 8 5/8" surface casing (approximately 350'-500').
- B. 7 7/8" hole to approximately 3300'-3600' to accommodate 5½" production casing.
- C. Estimated drilling time 6-7 days per well.
- D. Slope test will be run on each bit trip or 500' intervals.
- E. If any coring or drill stem testing is done pipe will be strapped out of hole prior to coring or testing.

V. <u>Drilling Contractor</u>:

- A. Contractor: WEK Drilling Company, Inc. (probable)
- B. Type Contract: Footage C. Contract Depth: 3600'

VI. Mud Program:

Probably will be furnished by Marrs Mud Co.

Interval Type Mud	Wt_	Viscosity	w]
0' - 3400' Fresh & Salt water 3400' - 3600' Salt Mud (will mud up 200' from TD)	9-10 10-11	28-30 36-38	NC NC

(Middle of unit area)

Tops	<u>Vertical Depth</u>		Subsea
Queen	1880'		+ 1715'
Loco Hills	2340'		+ 1255'
Main Metex	2450'		+ 1145'
San Andres	258 5 '	٠,	+ 1010'
Lovington	269 0 †	,	+ 905'
Jackson Pays	287 0'		+ 725'
Lower San Andres	3150'		+ 445'
Keely Pay	3330'		+ 265'
Sub Keely Pay	34501		+ 145'

VIII. Samples:

A. 10' samples from 2200' to TD or as directed by company representative.

IX. Cores and Drill Stem Test:

A. At present time no cores or drill stem tests are planned.

X. Logs:

A. Proposed logging program consists of: Sidewall Neutron-Gamma Ray-Caliper

0' - TD

XI. Casing and Tubing Program:

- A. Surface: 8 5/8" 20# range 2 casing to be set just above the top of the salt section and cemented to the surface with class C cement with 2% CaCl. If cement does not surface the casing will be cemented down backsode with 1".
- B. Production: 5½" K-55 15.5# ST&C casing. Sufficient volume of class H cement with ½" flocel, 3/4 of 1% CFR-2, 5# salt, 10# sand per sack will be pumped to cover well above all zones of interest.

XII. Safety Program:

A. Blow out preventors will be used as well as close observation by company personnel to assure the well is safely drilled.

XIII. Third Party Services:

Surveying: Jones & Co. or John West Engineering
Dirt Work: Jabo Rowland or Sweatt Construction

Cementing: Halliburton or B.J. Logging: Dresser Atlas

Logging: Dresser Atlas
Stimulation: Western or Cardinal
Drilling Mud: Marr's Mud Co.

Water & Trucking: I & W or Caprock

SURFACE USE PLAN

GENERAL AMERICAN OIL COMPANY OF TEXAS WELL: Burch B #33 LEASE: LC-028793 (b) EDDY COUNTY, NEW MEXICO

The subject well is located approximately 23 miles East of Artesia, New Mexico on the south side of U.S. Highway 82. The following is a discussion of pertinent information concerning possible effect, which the proposed drilling of the well may have on the environment, of the well and road sites and surrounding acreage. A copy will be posted on the derrick floor so that all contractors and sub-contractors will be aware of all items of this plan.

- 1. AERIAL ROAD MAP Exhibit A is a portion of the Artesia Quadrangle Map #106 and Maljamar Quadrangle Map 107 showing well site in relation to U.S. Highway 82. Access road, which is shown on Exhibit B and colored in red, exits the highway about 25 miles East of Artesia, New Mexico.
- 2. LOCATION OF EXISTING WELLS The location of existing wells in the immediate area of the proposed well is shown on Exhibit B.
- 3. PROPOSED WELL MAT AND IMMEDIATE AREA Refer to Exhibit C for direction orientation and road access.
 - a. MAT SIZE 140' x 180'.
 - b. SURFACED Will be topped with 6" of caliche, bladed, watered and compacted.

 Caliche to be purchased from B.L.M. by dirt contractor.
 - c. RESERVE PIT 60' x 70' pit unlined, joining mat to North.
 - d. <u>CUT & FILL</u> Location is basically flat except for small sand dunes. No fill will be needed except existing sand dunes leveled and topped with caliche.
 - e. <u>DRILL SITE LAYOUT</u> Exhibit C shows the location and layout including position of the Rig, Mud Tanks, Reserve Pits, Pipe Racks and etc. The Rig will be errected with the V-Door to the East.

f. SETTING AND ENVIRONMENT

- (1) Terrain Low rolling sand hills.
- (2) Soil Sandy Soil.
- (3) <u>Vegetation</u> Sparse vegetation, being mostly mesquite, shennery, weeds and other semi-desert plants, with some grass.
- (4) Surface Use Grazing.
- (5) Other Drillsite Which is in sandy semi-arid desert country, is in a low environment risk area. The total effect of drilling and producing this and other wells in this area would be very minimal.

gram and the production of

g. DISTANCES TO

- (1) Ponds and Streams There are no surface waters within 3 miles.
- (2) Water Wells There are no water wells within 1/2 mile.
- (3) Residences and Buildings There are no residences or buildings within 1/2 mile.
- (4) Arroyos, Canyons, Hills and etc. Outside of small sand dunes there are no surface features.
- h. WELL SIGN Sign identifying and locating proposed well will be maintained at the drill site commencing with the spudding of the well.
- 1. OPEN PITS All pits containing mud or other liquids will be guarded.

4. ROADS

- a. EXISTING ROADS All existing roads within the immediate area of well site are shown on Exhibit B and are colored yellow.
- b. PLANNED ROADS Planned access road will require about 750 feet of new road that is 12 feet wide. The road will be surfaced with caliche. The proposed road is colored blue and a suggested route to the location colored red on Exhibit B.
- c. FENCES, GATES AND CATTLE GUARDS Will be maintained as General American
 Oil Company already operates several hundred wells in the immediate
 area.
- 5. TANK BATTERY If production is encoutered no additional battery will be required as sufficient facilities are already on the lease.

6. LEASE - PIPELINES

- a. EXISTING All existing pipelines are shown on Exhibit B.
- b. <u>PLANNED</u> If production is encoutered, proposed flowline shown on Exhibit B, will consist of 2" steel line laid on top of the ground.
- 7. WASTE DISPOSAL Barrel trash containers will be in accessible locations within the drill site area during the drilling and completion operations. A waste disposal pit will be deep enough to handle waste and will be covered with a minimum of 2 feet of top soil. See Exhibit C for pit location. If well is productive, maintenance waste will be placed in special trash cans and hauled away periodically. Any produced water will disposed of through the currently existing S.W.D. systems.
- 8. WATER SUPPLY Water supply to drill this well will be furnished through a 2" PVC line laid through the drilling area. Location of the water line is shown on Exhibit B.

- 9. ARCHEOLOGICAL RESOURCES See attached Conservation Archaeology's Clearance Report.
- 10. RESTORATION OF SURFACE If well is productive, pits will be backfilled and leveled as soon as practical. Upon final abandonment of well, well site will be leveled and cleaned, with land returned as near as practical to original condition.
- 11. OPERATOR'S REPRESENTATIVES Field personnel who can be contacted concerning compliance of this surface use plan are as follows:

Drilling and Production

Lendell Hawkins
P. O. Box 128
Loco Hills, New Mexico 88255

Office Phone: 505-677-2481
Home Phone: 505-677-2277

Fred Starkey P. O. Box 128

Loco Hills, New Mexico 88255 Office Phone: 505-677-2481 Home Phone: 505-746-9397


12. CERTIFICATION


I hereby certify that I, or persons under my direct supervision have inspected the proposed drill site and access route; that I am familiar with the conditions as they actually exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the proposed work performed by General American Oil Company and its Contractors and Sub-Contractors will conform to this plan.


OR

December 27, 1979

Lendell Hawkins, Asst. Field Superintendent

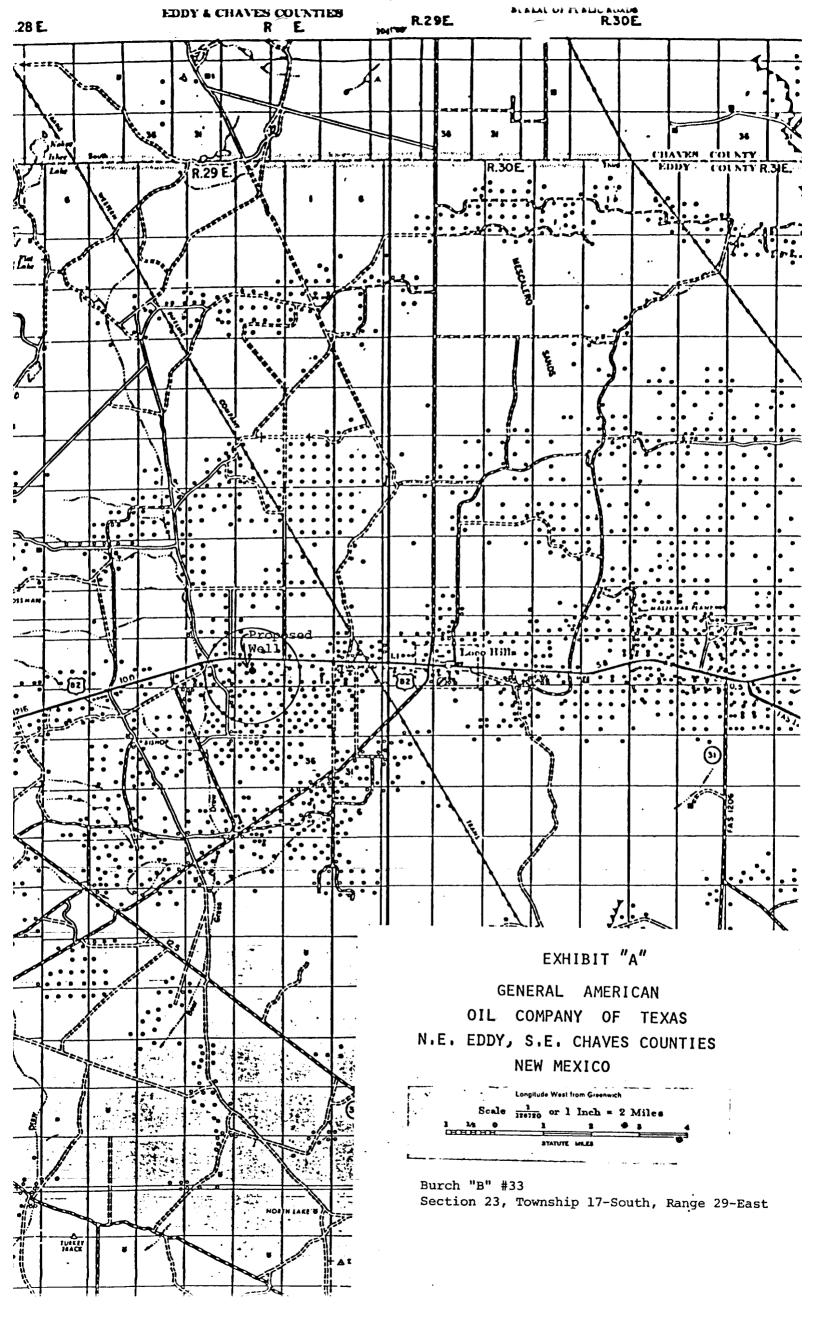

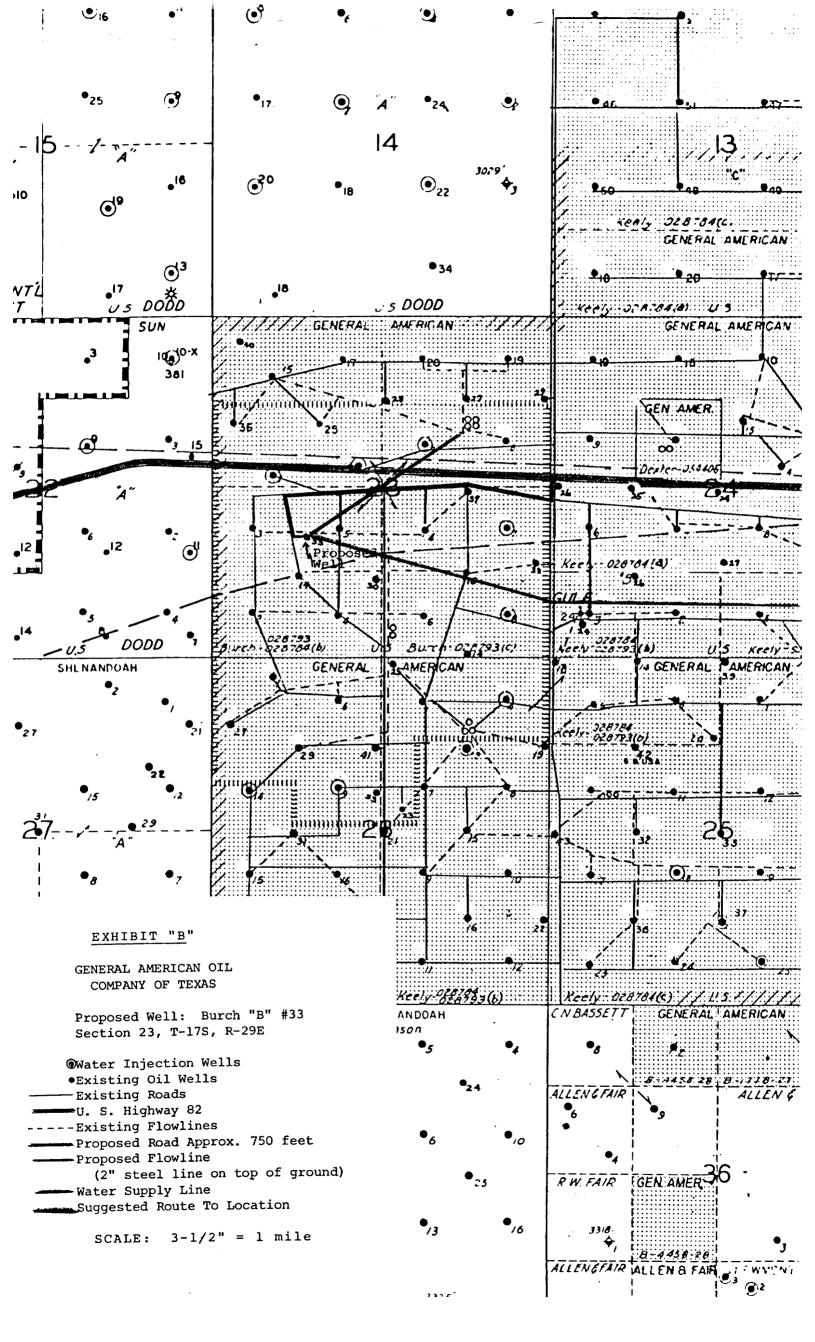

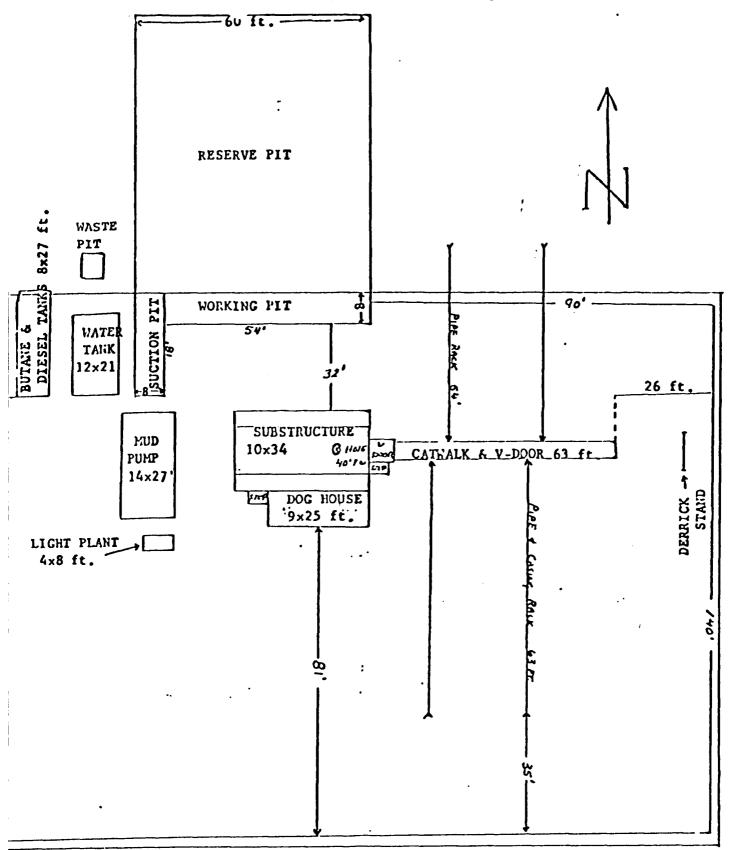

TO LOCATION 2' WIDE


EXHIBIT "C"
Scale: 1"=25'

ARCHAEOLOGICAL CLEARANCE REPORT

For

GENERAL AMERICAN OIL COMPANY

80-166

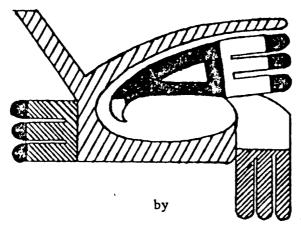

Rodrick MacLennan

Edited and Submitted by

Dr. Peter S. Miller
Director
AGENCY FOR CONSERVATION ARCHAEOLOGY

Llano Estacado Center for Advanced Professional Studies and Research

Eastern New Mexico University Portales, New Mexico 88130

December 22, 1979

INTRODUCTION

An archaeological reconnaissance was recently completed by the Agency for Conservation Archaeology, Eastern New Mexico University, Portales, New Mexico, for General American Oil Company in Eddy County, New Mexico. The reconnoitered area will be impacted by the construction of 4 well pads, 3 roads and 5 caliche pits. The project was administered jointly by Mr. Lendell Hawkins of General American Oil Company and Dr. Peter S. Miller, Director, Agency for Conservation Archaeology. This report was prepared by the Roswell Office of ACA, Rodrick MacLennan, Manager.

The field work was conducted on December 21, 1979 by Rod MacLennan. Good field and weather conditions prevailed throughout the course of this reconnaissance. The survey was completed under Federal Antiquities Permit No. 79-NM-049. A search of the National Register has been made and properties within this location are not listed on the Register.

SURVEY TECHNIQUES

Visual inspection of the well pads was completed by walking a series of parallel transects. Each transect was covered in a tightly spaced zigzag pattern. All access roads were examined as individual transects, with tightly spaced zigzag patterns covering the length and breadth. The caliche pits were inspected by walking a series of parallel transects. Each transect was covered in a tightly spaced zigzag pattern. The distance between the transects was 20 feet. These methods maximized the opportunity of observing any cultural resources within or near the proposed areas of impact.

Burch "B" No. 33

Location

The proposed well pad and access road are located 3.6 miles west of Loco Hills, New Mexico, near the Querecho Plains. The pad measures 400 X 400 feet and the access right-of-way measures 15 X 750 feet. They are situated in the:

NE4SW4, Section 23, T17S, R29E, NMPM, Eddy County, New Mexico (BLM)

Map Reference: USGS Red Lake SE Quadrangle, 7.5 minute series, 1955 (see Figures 1 & 2).

Terrain

The proposed well pad and associated access corridor are located near the Querecho Plains and are 1 mile east of Bear Grass Draw. They are situated on a gently undulating plain overlain by a dune field. The elevation is 3588 feet.

The soils encountered in the area are predominantly calcareous sands. No lithic inclusions were found within this soil. Taxonomically, this soil can be classified as a member of the Haplargid-Torripsamment association.


Figure 1

2000

1000

1000

. 2000

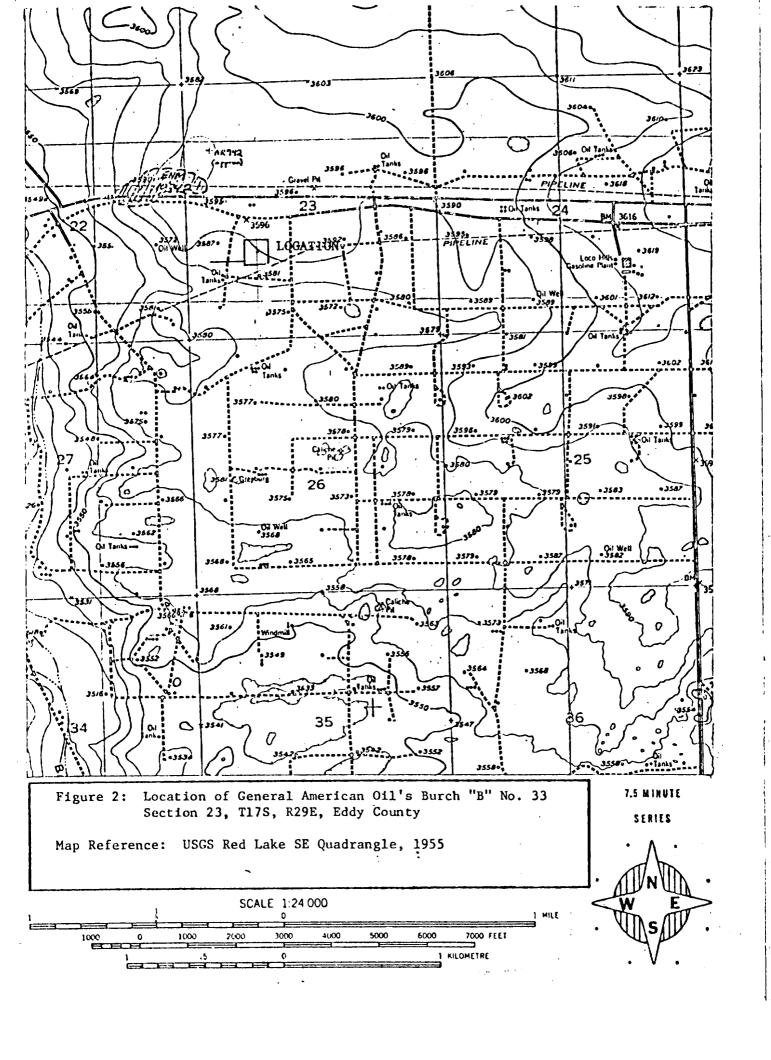

Floristics

ACA encountered a sparse floral assemblage in this vicinity. The density of the ground cover in the area is approximately ten percent, consisting primarily of shrubs. Among the species present are: mesquite (Prosopis juliflora), black grama (Bouteloua eriopoda), blue grama (Bouteloua gracilis), and broom snakeweed (Gutierrezia sarothrae).

Cultural Resources

During the course of this survey, ACA did not encounter any archaeological sites. However, one isolated manifestation was recorded:

IM-1: is a silicified scraper and was found at 10 feet north of the pad center stake.

A review of ACA's site files and the National Register did not show any properties listed for this location.

Recommendations

ACA recommends clearance for the proposed well pad and associated access right-of-way and suggests that construction be allowed to proceed as currently planned.

Caliche Pit No. 5

Location

The proposed caliche pit is located 2.5 miles southwest of Loco Hills, New Mexico, near the Querecho Plains. The caliche pit measures 400 X 450 feet and is located as follows:

NW4NW4, Section 30, T17S, R30E, NMPM, Eddy County, New Mexico (BLM)

Map Reference: USGS Red Lake SE Quadrangle, 7.5 minute series, 1955 (see Figure 13).

Terrain

The proposed caliche pit is located near the Querecho Plains and is 3.5 miles east of Bear Grass Draw. The pit is located on a gently undulating plain which is overlain by a dune field. The elevation is 3610 feet.

The soils encountered in the area are predominantly calcareous sands. Taxonomically, this soil can be classified as a member of the Haplargid-Torripsamment association.

Floristics

ACA encountered a sparse floral assemblage in the vicinity of the caliche pit. The density of the vegetation is approximately ten percent, consisting primarily of shrubs. Among the species present are: mesquite (Prosopis juliflora), oak brush (Quercus havardii), and broom snakeweed (Gutierrezia sarothrae).

Cultural Resources

ACA did not encounter any archaeological sites or isolated manifestations during the course of this reconnaissance. A review of ACA's site files and the National Register did not show any properties listed for this location.

Recommendations_

ACA recommends clearance for the proposed caliche pit and suggests that construction be allowed to proceed as currently planned.

