

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM 0384575

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different depth. Use "APPLICATION FOR PERMIT—" for such proposals.)

RECEIVED

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

JUN 30 1981

2. NAME OF OPERATOR

Southland Royalty Company

O. C. D.

3. ADDRESS OF OPERATOR

1100 Wall Towers West

Midland, TX 79701

ARTESIA OFFICE

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*

See also space 17 below.)
At surface

1650' FSL & 2310' FWL

Sec. 15, T-17-S, R-30-E

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Dale H. Parke "A" Tr. 1

9. WELL NO.

#12

10. FIELD AND POOL, OR WILDCAT

Grayburg-Jackson (SR, Q, G, SA)

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 15, T-17-S, R-30-E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3691.9' GR

12. COUNTY OR PARISH 13. STATE

Eddy

NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:


SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐ PULL OR ALTER CASING ☐
FRACTURE TREAT ☐ MULTIPLE COMPLETE ☐
SHOOT OR ACIDIZE ☐ ABANDON* ☐
REPAIR WELL ☐ CHANGE PLANS ☐
(Other) ☐

WATER SHUT-OFF ☐ REPAIRING WELL ☐
FRACTURE TREATMENT ☐ ALTERING CASING ☐
SHOOTING OR ACIDIZING ☐ ABANDONMENT* ☐
(Other) Set 5 1/2" Production CSg ☒
(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) *

Dr1 7 7/8' hole to 3555', CCM to run csg.
Ran 85 jts 5 1/2" 14# K-55, ST&C csg. Set @ 3555'.
Cmt w/550 SXS lite wt. cmt. w/20# salt /sx & 550 sxs Cl "C" cmt.
PD @ 6:15 p.m. 6-19-81. Circ 175 sxs cmt. WOC. Compressive strength
of Cl "C" cmt after 24 hours is 2705 psi @ 110° F

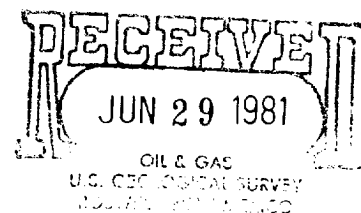

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE District Operation Engineer DATE 6-23-81

(This space for Federal or State office use)

APPROVED BY

ROGER A. CHAPMAN

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

JUN 29 1981

*See Instructions on Reverse Side

U.S. GEOLOGICAL SURVEY