


TYPE RSRA BOP STACK

THREE PREVENTERS

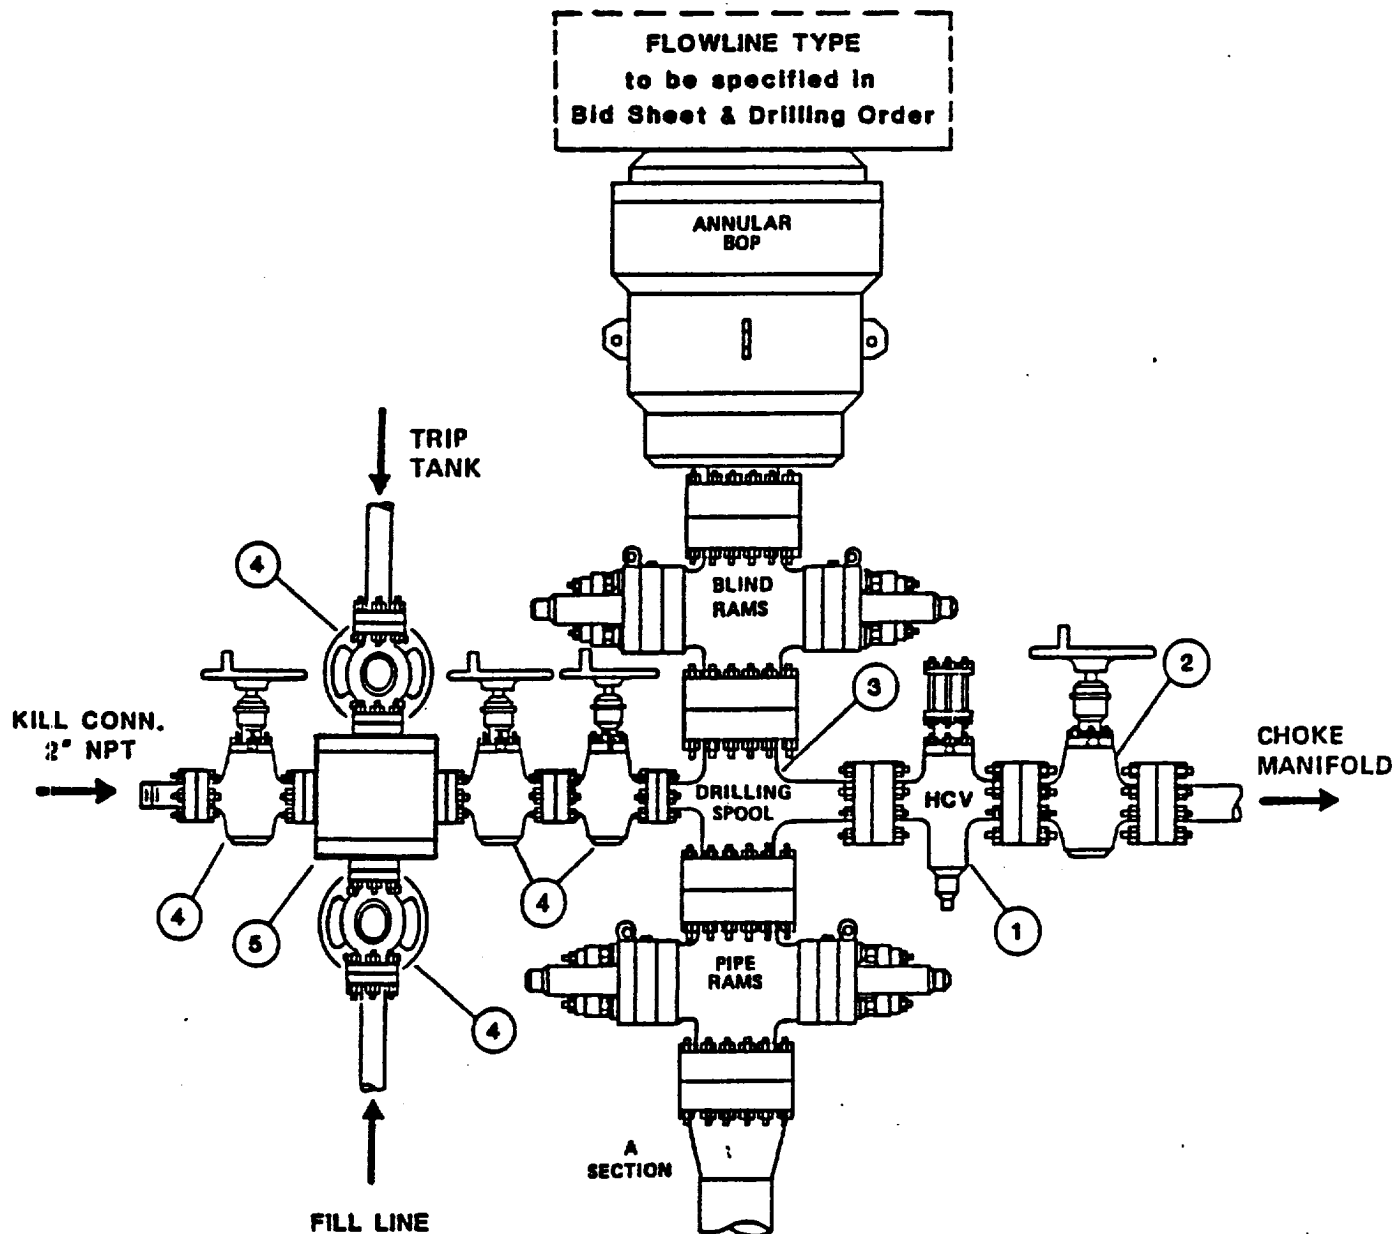

COMPONENT SPECIFICATIONS

Type RSRA BOP Stack..

1. Flanged hydraulically controlled gate valve -- 3" minimum nominal diameter -- same working pressure as BOP stack.
2. Flanged plug or gate valve -- 3" minimum nominal diameter -- same working pressure as BOP stack.
3. Drilling spool with flanged side outlets -- minimum 3" choke and minimum 2" kill line.
4. Flanged plug or gate valve -- 2" minimum nominal diameter -- same working pressure as BOP stack.
5. Flanged cross or two (2) flanged tees.

NOTE: Each BOP stack must have separate side outlet connections for kill and choke lines, unless specific approval for a single side-outlet is obtained from the Exxon Division Drilling Manager prior to rig-up. Such approval will not be granted unless the equipment arrangement conforms to the specifications shown on pages 14 and 15 of this Section.

