

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTOIL CONS COMMISSION
Lower DD
Artesia, NM 88210FORM APPROVED
Budget Bureau No. 1004-0135
Expires March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator
DEVON ENERGY OPERATING CORPORATION

3. Address and Telephone No.
20 NORTH BROADWAY, SUITE 1500, OKLAHOMA CITY, OKLAHOMA 73102 (405)552-4560

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1980' FSL & 660' FWL, Sec. 3-T17S-R31E

5. Lease Designation and Serial No.
LC 029426-B

6. If Indian, Allottee or Tribe Name
NA

7. If Unit or CA, Agreement Designation
NA

8. Well Name and No.
H. E. WEST 'B' #33

9. API Well No.
30-015-25944

10. Field and Pool, or Exploratory Area
GRAYBURG-JACKSON

11. County or Parish, State
EDDY CO., NEW MEXICO

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input checked="" type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

This well is presently producing from perforations 3457' to 3994' overall (TD 4057'). Devon Energy Operating Corporation plans to drill out the shoe joint (4011'-4057'), extend perforations from 3175' to 4050', and convert to water injection. This is an extension of D.O. # R-2268 of the Grayburg Jackson pool. It is expected the interval 3175' to 4050' will be acidized w/15% NEFE acid prior to initial injection.

See attached state application for authority to inject.

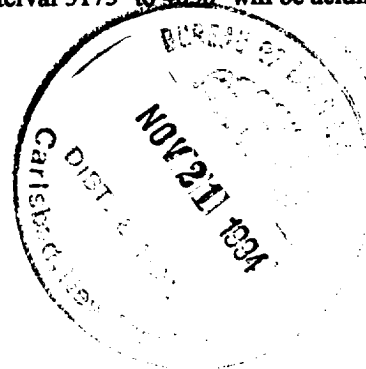

14. I hereby certify that the foregoing is true and correct

Signed Randy Jackson Title RANDY JACKSON
(This space for Federal or State office use) DISTRICT ENGINEER

Date 11/16/94

Approved by Orly Salazar Title Petroleum Engineer
Conditions of approval, if any: Subject to
State Approval
By State

Date 12/13/94

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

APPLICATION FOR AUTHORIZATION TO INJECT

- I. Purpose: ☒ Secondary Recovery ☒ Pressure Maintenance ☐ Disposal ☐ Storage
Application qualifies for administrative approval? ☒ yes ☐ no
- II. Operator: Devon Energy Operating Corporation
Address: 20 N. Broadway, Suite 1500, Oklahoma City, OK 73102-8260
Contact party: Randy Jackson Phone: (405) 552-4560
- III. Well data: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.
- IV. Is this an expansion of an existing project? ☒ yes ☐ no
If yes, give the Division order number authorizing the project R-2268
- V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review. Refer to Attachment V
- * VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail. Refer to Attachment VI
- VII. Attach data on the proposed operation, including: Refer to Attachment VII
1. Proposed average and maximum daily rate and volume of fluids to be injected;
 2. Whether the system is open or closed;
 3. Proposed average and maximum injection pressure;
 4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and
 5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).
- *VIII. Attach appropriate geological data on the injection zone including appropriate lithologic detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval. Refer to Attachment VIII
- IX. Describe the proposed stimulation program, if any. It is anticipated the interval 3224'-4050' will be acidized w/15% NEFE acid prior to initial injection.
- * X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division they need not be resubmitted.) Copies of current logs are on file.
- * XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken. There are no known producing fresh water wells within one mile of the proposed injection well.
- XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water. Refer to Attachment XII
- XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form. Refer to Attachment XIV.
- XIV. Certification

I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: Randy Jackson

Title: District Engineer

Signature: Randy Jackson

Date: 11/18/94

- * If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be duplicated and resubmitted. Please show the date and circumstance of the earlier submittal.

ATTACHMENT III (tabular)

WELL DATA

- A. (1) H. E. West "B" #33
1980' FSL & 660' FWL
Section 3-T17S-R31E
Eddy County, NM
- (2) Casing Data: Also see Attachment III (schematic).
Surface: 8 5/8" set @ 625' cem'd w/300 sx in a 12 1/2" hole. Circ.
Production: 5 1/2" set @ 4057' cmt'd w/1300 sx in a 7 7/8" hole. Circ.
Liners: None.
- (3) Injection Tubing: 2 3/8", 4.7#, J-55, 8rd EUE plastic coated set at 3175'.
- (4) Packer: Baker tension (or equivalent) set @ 3175' in tension.
- B. (1) Injection Formation: The injection formation will be the Grayburg San Andres.
- (2) Injection Interval: The injection interval is to be from perforations @ 3224'-4050'.
- (3) Original Purpose of Well: The well was originally drilled, completed and tested in the Grayburg San Andres as a producer from perforations 3457'-3994' overall.
- (4) Added Perforated Intervals: Will be evaluated after cased hole logs..
- (5) Higher/Lower Oil Zones: The top of the Seven Rivers is at +/- 2226' and there is no known lower oil zone.

Schematic: See Attachment III (schematic).

devon

OPERATION CORPORATION
 20 North Broadway, Suite 1820
 Oklahoma City, Oklahoma 73102-4260
 Telephone: (405) 254-3611
 Fax: (405) 253-4580

WELLBORE SCHEMATIC**WELL: H.E. West "B" No. 33****LOCATION: 1980' FSL & 660' FWL**3-17S-31EEddy Co., N.M.**Present****Proposed**8 5/8" @ 625' w 300sx.CMT. CIRC. Hole size 12 1/4"Top perfs. 3457'Btm. Perfs. 3994'5 1/2" @ 4057' w 1300sx.CMT. CIRC. Hole size 7 7/8"

PBTD 4011'

TD 4057'

2 3/8", 4, 7#, J-55
Plastic lined

Baker tension pkr.
 @ 3175'

Top perf. 3224'btm. perf 4050'

ATTACHMENT VII

PROPOSED OPERATION

1. **Average daily injection rate - 500 BWPD.
Maximum daily injection rate - 600 BWPD.**
2. **Type of system - closed.**
3. **Average injection pressure - 1900 psi.
Maximum injection pressure - 2500 psi.**
4. **Source of injection water - Produced water from the Keel West plus make up
water from Keel West fresh water system.**
5. **N. A.**

ATTACHMENT VIII

GEOLOGY AND LITHOLOGY

The proposed injection zone is in the Greyburg San Andres from 3224' to 4050'. The Greyburg formation consists primarily of quartz sand with cementation. The San Andres formation consists primarily of dolomite with intermingled stringers of quartz sand with dolomite cementation.

Surface formation is cretaceous and has no known source of drinking water. Also, there are no known sources of drinking water overlying or underlying the proposed injection zone.

ATTACHMENT XII

Upon examination of the available geologic and engineering data, no evidence of open faults or any other hydrologic connection between the injection zone and any underground source of drinking water was found.

ATTACHMENT XIV

PROOF OF NOTICE

Devon Energy Operating Corporation (applicant) is the operator of all wells within the area of review. The Bureau of Land Management is the surface owner. They have been notified by BLM Sundry Notice.

PROOF OF PUBLICATION

Proof of publication from the Carlsbad Current-Argus is enclosed.

Affidavit of Publication

Nº 16140

State of New Mexico,
County of Eddy, ss.

Amy McKay
being first duly sworn, on oath says:

That she is Business Manager of the Carlsbad Current-Argus, a newspaper published daily at the City of Carlsbad, in said county of Eddy, state of New Mexico and of general paid circulation in said county; that the same is a duly qualified newspaper under the laws of the state wherein legal notices and advertisements may be published; that the printed notice attached hereto was published in the regular and entire edition of said newspaper and not in supplement thereof on the date as follows, to wit:

November 15, 1994
_____, 19____
_____, 19____
_____, 19____
_____, 19____
_____, 19____

That the cost of publication is \$ 25.70,
and that payment thereof has been made and will
be assessed as court costs.

Amy McKay

Subscribed and sworn to before me this
16th day of November, 1994

Donna Crump

My commission expires 8/01/98
Notary Public

November 15, 1994

Legal Advertisement

Notice is hereby given that Devon Energy Operating Corporation is applying to the New Mexico Oil Conservation Division to convert the following well to an injection well for secondary recovery purposes:

H.E. West "B" #33
1980' FSL & 660' FWL
Section 3-T17S-R31E
Eddy County, NM

The intended purpose of this well is to inject produced waters into the Grayburg-San Andres formations to enhance oil production through secondary recovery. Maximum injection rates of 600 bwpd and a maximum pressure of 2500 psig are expected.

Interested parties must file objections or requests for hearing within 15 days to the following commission:

Oil Conservation Division
P.O. Box 2088
Santa Fe, NM 87501

Randy Jackson
District Engineer
Devon Energy Operating Corporation
20 North Broadway, Suite 1500
Oklahoma City, OK
(405) 552-4560

ATTACHMENT VI

H. E. West "A" #22	1345' FSL & 35' FEL Sec. 4-17S-31E	2/3/93	3/31/93	Producing Oil	TD 5022' PBTD 3560'	13 3/8" @ 604' w/350 sx cmt. 8 5/8" @ 1815' w/750 sx cmt. 5 1/2" @ 5022' w/1222 sx cmt. Completed in Grayburg San Andres through perfs 3278'-3522'.
H. E. West "A" #9	1980' FSL & 660' FEL Sec. 4-17S-31E	10/19/55	12/1/55	Injection (Oil well converted)	TD 3856' PBTD 3816'	8 5/8" @ 719' w/100 sx. 7" @ 3198' w/200 sx. TOC @ 1684' (CBL) 4 1/2" liner from 2968'-3856', cmt'd w/175 sx. Completed as an oil producer from 3196'-3650' open hole. Frac'd 3276'-81' w/1500 gals oil + 2000# sand. Frac'd 3383'-90' w/ 3000 gals oil + 4000# sand. Deepened to 3856' & 4 1/2" line ran to 3856' & cmt'd w/175 sx. Well was perf'd 3360'-75' and converted to injection.
H. E. West "A" #23	140' FSL & 35' FEL Sec. 4-17S-31E	3/1/93	9/8/93	Producing Oil	TD 4308' PBTD 4287'	13 3/8" @ 595' w/ 250 sx. Circ. to surface. 5 1/2" @ 4308' w/ 1600 sx cmt. Circ. to surface. Completed as an oil producer in the Grayburg San Andres from perfs 3259'-3530' (48 holes).

ATTACHMENT VI

H. E. West "A" #17	660' FSL & 660' FEL Sec. 4-17S-31E	12/12/89	1/6/90	Producing Oil	TD 3954' PBTD 3906'	8 5/8" @ 575' w/350 sx cmt. Circ. to surface. 5 1/2" @ 3948' w/1150 sx cmt. Circ. to surface. Completed as a producer from the Grayburg San Andres formation thru perfs 3273'-3839'.
H. E. West "B" #23	1980' FSL & 1980' FWL Sec. 3-17S-31E	8/59	9/59	P&A	TD 3357' P&A 4/82	8 5/8" @ 797' w/100 sx. 5" @ 3456' w/100 sx. Completed as a Grayburg San Andres producer thru perfs 3413'-3421' & 3429'-3435'. Deepened to 3557' and perf'd 3374'-3384' & open hole 3456'-3557'. Converted to injection. P&A 4/82 (see attached schematic).
H. E. West "B" #40	560' FNL & 660' FWL Sec. 10-17S-31E	12/22/88	2/2/89	Producing Oil	TD 4021' PBTD 3956'	8 5/8" @ 603' w/350 sx. Circ to surface. 5 1/2" @ 4021' w/1250 sx. Circ to surface. Completed in the Grayburg San Andres as a producer from perfs 3345'-3941' (170 holes). Acidized w/11,000 gals acid. Frac'd w/36,000 glas x-linked gelled water & 76,000# 20/40 sand.
H. E. West "B" #44	720' FSL & 1980' FWL Sec. 3-17S-31E	2/9/93	3/21/93	Producing Oil	TD 4400' PBTD 3925'	8 5/8" @ 580' w/450 sx. 5 1/2" @ 4400' w/100 sx. Completed as an oil producer thru perfs 3294'-3844' in Grayburg San Andres.
H. E. West "B" #49	1305' FSL & 1305' FWL Sec. 3-17S-31E	4/5/93	8/29/93	Producing Oil	TD 4350' PBTD 4276'	8 5/8" @ 618' w/300 sx. Circ. 5 1/2" @ 4350' w/1300 sx. Circ. Completed as a producer from the Grayburg San Andres thru perfs 3314'-3532' (50 holes). Additional perfs 3360'-3532' (280 holes).
H. E. West "B" #55	1972' FSL & 2078' FWL Sec. 3-17S-31E	2/21/93	5/6/93	Injection	TD 4300' PBTD 4265'	13 3/8" @ 575' w/300 sx. Circ cmt. 8 5/8" @ 1768' w/850 sx. Circ. cmt. 5 1/2" @ 4266' w/1000 sx. Circ. cmt. Completed as an oil producer thru perfs 4142'-4206' (92 holes) from the Grayburg San Andres. Well converted to injection thru Grayburg San Andres perfs 3314'-4206'.
H. E. West "B" #50	50' FSL & 1400' FWL Sec. 3-17S-31E	3/4/93	7/21/93	Producing Oil	TD 4356' PBTD 4285'	13 3/8" @ 576' w/1250 sx. Circ. to surface. 5 1/2" @ 4356' w/1900 sx. Circ. to surface. Completed in the Grayburg San Andres as a producer thru perfs 3300'-4052' (286 holes).

ATTACHMENT VI

WELL NAME	LOCATION	SPUD DATE	COMPLETION DATE	TYPE OF WELL	DEPTH/PBTD	COMPLETION RECORD
H. E. West "A" #6	2005' FNL & 660' FWL Sec. 4-17S-31E	1/2/55	2/12/55	Producing Oil	TD 3370' PBTD 3369'	8 5/8" @ 740' w/100 sx. 7" @ 3220' w/200 sx. TOC @ 1800' (Calc.). Completed as a producer in the Grayburg San Andres thru open hole 3320'-3369'. Deepened to 3870' and produced thru interval 3220'-3870'.
H. E. West "A" #8	1980' FNL & 660' FWL Sec. 3-17S-31E	8/55	9/55	Injection	TD 3902' PBTD 3902'	8 5/8" @ 769' w/100 sx in a 12 1/4" hole. Est TOC @ 318'. 5 1/2" @ 3246' w/2000 sx cmt in a 7 7/8" hole. TOC @ 2093' by CBL. 4" liner from 2985' to 3902' w/75 sx. Completed as a producer from the Grayburg San Andres open hole 3246'-3404'. Converted to injection. Deepened to 3902'. P&A 4/82. Re-entered, ran liner and returned to injection thru perfs 3360'-3795'.
H. E. West "A" #5	660' FNL & 660' FWL Sec. 4-17S-31E	10/20/54	12/14/54	Producing Oil	TD 3650' PBTD 3650'	8 5/8" @ 695' w/100 sx reg. cmt. 7" @ 3196' w/200 sx. Est. TOC @ 1130'. Perf'd 695' and circ cmt out 7" and 8 5/8" annulus. Shut BH valve and sqz'd 15 sx in formation @ 695'. Completed as a producer from the Grayburg San Andres thru open hole 3196'-3650'.
H. E. West "B" #37	1980' FSL & 660' FWL Sec. 3-17S-31E	11/12/88	12/23/88	Producer	TD 4082' PBTD 4062'	8 5/8" @ 627' w/400 sx. Circ to surface. 5 1/2" @ 4082' w/1350 sx. Circ to surface. Completed as a producing oil well thru perfs 3410'-4038' in the Grayburg San Andres. The interval was acidized w/15% NEEF acid. No fracturing.
H. E. West "B" #16	660' FSL & 660' FWL Sec. 3-17S-31E		8/58	Injection	TD 3978' PBTD 3978'	10 3/4" @ 765' w/100 sx. 5 1/2" @ 3673' w/100 sx. TOC @ 2660' (CBL). Liner: 4" set from 3264'-3978' w/75 sx. Completed in the Grayburg Sand Andres as a producer from perfs 3370'-3384' and 3570'-3578'. Added perfs from 3333'-3341', 3394'-3397', 3439'-3497', and 3501'-3520'. Deepened to 3978' and ran 4" liner. Perf'd 3792'-3961', 3546'-3742' and 3333'-3523'. Converted well to injection.
H. E. West "A" #16	1980' FNL & 1980' FWL Sec. 3-17S-31E	12/4/88	1/12/89 Recompleted 8/8/89	Producer	TD 4076' PBTD 4076'	8 5/8" @ 644' w/400 sx. Circ. to surface. 5 1/2" @ 4076' w/1250 sx. Completed as an oil producer in the Grayburg San Andres thru perfs 3415'-3953'.

ATTACHMENT VII

PROPOSED OPERATION

1. Average daily injection rate - 500 BWPD.
 Maximum daily injection rate - 600 BWPD.
2. Type of system - closed.
3. Average injection pressure - 1900 psi.
 Maximum injection pressure - 2500 psi.
4. Source of injection water - Produced water from the Keel West plus make up
 water from Keel West fresh water system.
5. N. A.

ATTACHMENT VIII

GEOLOGY AND LITHOLOGY

The proposed injection zone is in the Greyburg San Andres from 3224' to 4050'. The Greyburg formation consists primarily of quartz sand with cementation. The San Andres formation consists primarily of dolomite with intermingled stringers of quartz sand with dolomite cementation.

Surface formation is cretaceous and has no known source of drinking water. Also, there are no known sources of drinking water overlying or underlying the proposed injection zone.

ATTACHMENT XII

Upon examination of the available geologic and engineering data, no evidence of open faults or any other hydrologic connection between the injection zone and any underground source of drinking water was found.

ATTACHMENT XIV

PROOF OF NOTICE

Devon Energy Operating Corporation (applicant) is the operator of all wells within the area of review. The Bureau of Land Management is the surface owner. They have been notified by BLM Sundry Notice.

PROOF OF PUBLICATION

Proof of publication from the Carlsbad Current-Argus is enclosed.

Affidavit of Publication

Nº 16141

State of New Mexico,
County of Eddy, ss.

Amy McKay
being first duly sworn, on oath says:

That she is Business Manager
of the Carlsbad Current-Argus, a newspaper published daily at the City of Carlsbad, in said county of Eddy, state of New Mexico and of general paid circulation in said county; that the same is a duly qualified newspaper under the laws of the state wherein legal notices and advertisements may be published; that the printed notice attached hereto was published in the regular and entire edition of said newspaper and not in supplement thereof on the date as follows, to wit:

November 15, 1994
_____, 19____
_____, 19____
_____, 19____
_____, 19____
_____, 19____

That the cost of publication is \$ 25.70,
and that payment thereof has been made and will be assessed as court costs.

Amy McKay

Subscribed and sworn to before me this
16th day of November, 1994

Donna Crump

My commission expires 8/01/98

Notary Public

November 15, 1994

Legal Advertisement

Notice is hereby given that Devon Energy Operating Corporation is applying to the New Mexico Oil Conservation Division to convert the following well to an injection well for secondary recovery purposes:

H.E. West "B" #33
1980' FSL & 660' FWL
Section 3-T17S-R31E
Eddy County, NM

The intended purpose of this well is to inject produced waters into the Grayburg-San Andres formations to enhance oil production through secondary recovery. Maximum injection rates of 600 bwpd and a maximum pressure of 2500 psig are expected.

Interested parties must file objections or requests for hearing within 15 days to the following commission:

Oil Conservation Division
P.O. Box 2088
Santa Fe, NM 87501

Randy Jackson
District Engineer
Devon Energy Operating Corporation
20 North Broadway, Suite 1500
Oklahoma City, OK
(405) 552-4560