# UNIT STATES

SUBMIT IN TRIPLICATE \* (Other Instructions on reverse sid

FORM APPROVED CISF OMB NO. 1004-0136 Expires: February 28, 1995

D	<b>EPARTMEN</b> OF TH	IE INTERIO	)R			5LEASE DESIGNATION AND S	·
	BUREAU OF LAND MA	NAGEMENT	اً دِ <sup>رِي</sup> ُّ 		a de la company	LC-029420-	
APPLIC	CATION FOR PERMI	T TO DRIL				6IF INDIAN, ALLOTTEE OR T	
la TYPE OF WORK			Rec	la 11-21-	30	N/A	
DRI	LL X DE	EPEN	, -	21 2.7	7	7. CITT AGIGGEMENT NAME	7540)
b. TYPE OF WELL	<u></u>			10 m		Skelly Unit (1 8. FARM OR LEASE NAME, WE	
OIL X GAS WELL	OTHER		SINGLE ZONE	MULTIPLE ZONE		,	#192
2. NAME OF OPERATOR	The Wiser Oil Comp	any (22922)		DEC 23 '91	6	9. API WELL NO. 30-015- 29	313
3. ADDRESS AND TELEPHONE NO.  c/o J. O. Easley, Inc., P. O. Box 1796, Roswell, NM 88201-1796 (505) 623-3758  10. FIELD AND POOL OR WILDCAT  Grayburg Jackson 7-Rivers-QN-GB-SA (28509)							
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*) ARTESIA, OFFICE							
	0' FSL & 17' FEL, Unit I					AND SURVEY OR AREA	
At proposed prod. Zone	2630' <b>FSL &amp; 17</b> ' <b>FEL</b>	, Unit I سلا				15, 17S-31E, N	I.M.P.M.
14. DISTANCE IN MILES AN	D DIRECTION FROM NEAREST TOWN	OR POST OFFICE*				12. COUNTY FOR PARISH	13.STATE
± 5.4 miles sout	hwest of Maljamar, NM				_	Eddy	NM
15. DISTANCE FROM PROPO LOCATION TO NEAREST			16. NO. OI	FACRES IN LEASE		O. OF ACRES ASSIGNED O THIS WELL	
PROPERTY OR LEASE L	NE, FT. 17'			640.00	ı.	40	
(Also to nearest drig. u: 18. DISTANCE FROM PROPO			19. PROPO	DSED DEPTH	20. R	OTARY OR CABLE TOOLS	
	to nearest well, drilling, completed 917.8' 4800' Rotary						
21. ELEVATIONS (Show with				<u>,                                      </u>	22	. APPROX. DATE WORK WILL STA	RT *
3	885'					12-1-96, or Upon	Approval
23.	PROPOSE	D CASING AND	CEMENT	TING PROGRAM			
SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER		SETTING DEPTH	П	QUANTITY OF CEME	NT
12 1/4"	8 5/8" 8RD X-42	20#		350'		Circulate CIINE	S
7 7/8"	5 ½" J-55	17#		4800'	<del></del> -	Sufficient to bring cmt 100'IRCUL	
						above 8 5/8" casing sl	
Duration of Decar	rom: Drilling Nine (0	٠,٠,٠					river President
Duration of Progr	ram: Drilling - Nine (9	, ,	_				
Con attached for	Completion - Thi		S			<del>enere</del>	N/ - 2014 - 2017
See attached for t	complete Drilling Progra			~			5 F2
Eschibit "A": Deill	ing Program - Eyhihi		CHIBITS	<b>-</b>	Evh	ihit "C" Die Lauste	5년 4월 4월
Exhibit "A": Drill Exhibit "B": H <sub>2</sub> S	• •	t "D": Land t "E": Vicini	_			ibit "G": Rig Layout ibit "H": BOP Layou	
Exhibit "C": Surf		t 'F'': Existi	-		EXII	IUIL H. DOP Layou	ι
N ABOVE SPACE DESCRIBE F	ROPOSED PROGRAM: If proposal is	to deepen, give da	ta on prese	ent productive zone and	propos	ed new productive zone. If prop	osal is to drill or
deepen directionally, give per 24.	tinent data on subsurface locations a	and measured and t	rue vertica	al depths. Give blowout	preven	ter program, if any.	
N. W.	120-1						
SIGNED Michael I	ul R. Duch	TTILE <u>A</u>	gent for	r The Wiser Oil (	Comp	any date <u>11-20-9</u>	6
(This space for Federal or S	R. Burch, CPL						
PERMIT NO.			A	PPROVAL DATE		_	
	not warrant or certify that the applica	ant holds legal or ea			subject	lease which would entitle the app	licant to conduct
operations thereon. CONDITIONS OF APPROVAL.			-1	-	-		
	D.) ARMANOU A. LOPEZ	TITLE TITLE	) 12. Mi	WEHALS	1	DATE /2/20/96	
		*See Instructi	ons On F	Reverse Side			

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Choke line & values BOPE System. required for CHERA STURMENIA AM SPICIAL SPICIAL STRAIGHT MINUTED ...

#### **EXHIBIT "D"**

DISTRICT I P.O. Box 1980, Hobbs, NM 88241-1980 State of New Mexico

Energy, Minerals and Natural Resources Department

Form C-102 Revised February 10, 1994 Submit to Appropriate District Office State Lease - 4 Copies

Fee Lease - 3 Copies

DISTRICT II P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT IV

DISTRICT III 1000 Rio Brazos Rd., Aztec. NM 87410

P.O. BOX 2088, SANTA FE, N.M. 87504-2088

#### OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

□ AMENDED REPORT

#### WELL LOCATION AND ACREAGE DEDICATION PLAT

	28509 Grayburg Jackson 7	'-Rivers QN GB SA
Property Code  017540  OGRID No.	Property Name SKELLY UNIT "1"	Well Number 192
O22922	Operator Name THE WISER OIL COMPANY	Elevation 3890

#### Surface Location

	UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
	<u> </u>	15	17 S	31 E		2630	SOUTH	17	EAST	EDDY
	Bottom Hole Location If Different From Surface									
1	UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	Fact/West line	Country

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acre		Infill Co	nșolidation (	Code Or	der No.				
40									

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

.4		OPERATOR CERTIFICATION
		I hereby vertify the the information contained herein is true and complete to the best of my knowledge and belief.
		Signature Michael R. Burch, CPL Agent for The Wiser Oil Printed Name Company  Title 11-20-96
		Date
	17:3	SURVEYOR CERTIFICATION
	3886.1'3893.6'	I hereby certify that the well location shown on this plat was plotted from field notes of
	3883.9' 3901.1'	actual surveys made by me or under my supervison, and that the same is true and correct to the best of my belief.
	DETAIL. 70.29.2	Date Sureked CDG Signature & Seal COG
		Professional Spreyof
		Centificat No. 301N W2 VEST 676 RONAS Z. EIDSON 3239 1000 2000 1000 12641

#### EXHIBIT "A"

#### DRILLING PROGRAM

- I. The geological surface formation is recent Permian with quaternary alluvium and other surficial deposits.
- II. Estimated Tops of Geological Markers:

<u>FORMATION</u>	<u>DEPTH</u>
Rustler Anhydrite	540'
Top of Salt	670'
Base of Salt	1570'
Queen	2650'
Grayburg	3050'
San Andres	3430'
TD	4800'

III. Estimated depths at which water, oil, gas, or other mineral-bearing formations are expected to be encountered:

SUBSTANCE	<u>DEPTH</u>
Fresh Water	There is little, if any, in this section
Oil	Fren 7-Rivers; Grayburg and San Andres below 3200'
Gas	None anticipated

## IV. A. Proposed Casing Program:

_	HOLE SIZE	CASING SIZE	<u>GRADE</u>	WEIGHT PER FOOT	<u>DEPTH</u>
	12 ¼"	8 5/8"	New 8RD X-42	20#	350'
	7 7/8"	5 ½"	New 8RD LT&C J-55	17#	4800'

#### B. Proposed Cement Program:

8 5/8" Cmt w/ 300 sx Class "C" cmt w/2% CaCl. Circulate to surface.

5 ½" Cmt w/ 700 sx Halliburton Lite w/¼# Flocele, 325 sx Premium Plus w/.5% Halad-9, & 325 sx Premium Plus w/.5% Halad-344 w/3% KCl.

The top of cement is designed to reach 100' above 8 5/8" casing shoe.

#### V. Proposed Mud Program:

The well will be drilled to total depth using brine & fresh water. Depths of systems are as follows:

INTERVAL	MUD TYPE	MUD WT.	<u>VISCOSITY</u>
0-400'	Fresh Water	8.8 ppg	30
400'-TD	Brine Water	9.5-10.5 ppg	28

#### VI. Proposed Control Equipment:

Will install on the 8 5/8" surface casing a 10" Series 900 Type "E" Shaffer Double Hydraulic BOP and will test before drilling in the Queen formation. BOP working pressure: 3000 psi. See Exhibit "H" for BOP layout.

#### VII. Auxiliary Equipment:

Blowout preventor, gas detector, kelly cock, pit level monitor, flow sensors, and stabbing valve.

#### VIII A. Testing Program:

Drill Stem Tests: None planned

B. Logging Program:

<u>LOG</u> <u>Interval</u>

GR-DLL-MSFL-Cal T.D. - 2,300'

GR-CNL-CDL-Cal T.D. - Surface

C. Coring Program:

None planned

IX No abnormal pressures or temperatures are anticipated. In the event abnormal pressures are encountered, the proposed mud program will be modified to increase the mud weight. The estimated maximum bottom hole pressure is 1980 psi.

#### EXHIBIT "B"

#### HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

#### I. Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- 1. The hazards and characteristics of hydrogen sulfide  $(H_2S)$ .
- 2. The proper use and maintenance of personal protective equipment and life support systems.
- 3. The proper use of  $H_2S$  detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- 4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- 1. The effects of H<sub>2</sub>S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- 2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- 3. The contents and requirements of the H<sub>2</sub>S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H<sub>2</sub>S zone (within 3 days or 500 feet) and weekly H<sub>2</sub>S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H<sub>2</sub>S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

#### II. H<sub>2</sub>S Safety Equipment and Systems

Note: All H<sub>2</sub>S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating, the first zone containing, or reasonably expected to contain, H<sub>2</sub>S.

#### 1. Well Control Equipment:

- A. Flare line with electronic igniter or continuous pilot.
- B. Choke manifold with a minimum of one remote choke.
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
- D. Auxiliary equipment to include annular preventer, mud-gas separator, rotating head, and flare gun with flares.
- 2. Protective equipment for essential personnel:
  - A. Mark II Surviveair 30-minute units located in the dog house and at briefing areas, as indicated on Exhibit "G".
- 3. H<sub>2</sub>S detection and monitoring equipment:
  - A. Two portable H<sub>2</sub>S monitors positioned on location for best coverage and response. These units have warning lights and audible sirens when H<sub>2</sub>S levels of 20 ppm are reached.
  - B. One portable S02 monitor positioned near flare line.
- 4. Visual warning systems:
  - A. Wind direction indicators as shown on Exhibit "G".
  - B. Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used when appropriate.

#### 5. Mud program:

- A. The mud program has been designed to minimize the volume of H<sub>2</sub>S circulated to the surface. Proper mud weight, safe drilling practices, and the use of H<sub>2</sub>S scavengers will minimize hazards when penetrating H<sub>2</sub>S-bearing zones.
- B. A mud-gas separator and an H<sub>2</sub>S gas buster will be utilized.

#### 6. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H<sub>2</sub>S service.
- B. All elastomers used for packing and seals shall be H<sub>2</sub>S trim.

#### 7. Communication:

- A. Radio communications in company vehicles including cellular telephone and 2-way radio.
- B. Land Line (telephone) communications at field office.

#### 8. Well testing:

A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity which are necessary to safely and adequately conduct the test. The drill stem testing will be conducted during daylight hours, and formation fluids will not be flowed to the surface. All drill stem testing operations conducted in an H<sub>2</sub>S environment will use the closed chamber method of testing.

#### EXHIBIT "C"

# SURFACE USE AND OPERATIONS PLAN CULTURAL RESOURCES SURVEY APPROXIMATE REHABILITATION SCHEDULE

LOCALITY: SKELLY UNIT #192

LOCATION: NE¼SE¼ OF SECTION 15, T17S-R31E, N.M.P.M. EDDY COUNTY, NEW MEXICO

OPERATOR: THE WISER OIL COMPANY

#### **SUBMITTED TO:**

UNITED STATES DEPARTMENT OF THE INTERIOR

BUREAU OF LAND MANAGEMENT

ROSWELL AREA OFFICE

2909 WEST 2<sup>ND</sup> STREET

ROSWELL, NEW MEXICO 88201

TELEPHONE (505) 627-0272

This plan is submitted to provide permitting agencies with information necessary to allow an appraisal of the environmental effects associated with the proposed drilling operations. Within the context of typical drilling operations, this plan provides for protection of surface resources and other environmental components. This plan has been developed in conformity with the United States Geological Survey NTL-6 guidelines, Bureau of Land Management Oil and Gas Order No. I, and in connection and consultation with the private surface owner of record, if other than the United States of America, as well as the Carlsbad Area Resource Office for the Bureau of Land Management and the United States Department of the Interior personnel.

#### **PART #1**:

#### 1) Surface Location:

NE¼SE¼ of Section 15, Township 17 South, Range 31 East, N.M.P.M. Eddy County, New Mexico #2630' FSL and 17' FEL, Unit I See attached Exhibit "D"

#### 2) Bottom Hole Location:

NE¼SE¼ of Section 15, Township 17 South, Range 31 East, N.M.P.M. Eddy County, New Mexico #2630' FSL and 17' FEL, Unit I See attached Exhibit "D"

#### 3) <u>Leases Issued:</u>

a) LC-029420-A

#### 4) Record Lessee:

a) Texaco Exploration & Production Inc.
 P. O Box 2100
 Denver, Colorado 80201

100%

#### 5) Acres in Lease:

a) Section 15: All

640.0000 640.0000

#### 6) Acres Dedicated to Well:

There are 40.0000 acres dedicated to this well which takes in the NE¼SE¼ of Section 15, Township 17 South, Range 31 East, Eddy County, New Mexico.

#### **PART #2**:

#### 1) Existing Roads:

Exhibit "E" is a map showing the location of the proposed well, as staked, in relation to existing roads and U. S. Highway 82. The well is  $\pm$  5.4 miles southwest of Maljamar, New Mexico. From Loco Hills, New Mexico, go east approximately 8.2 miles on US 82. Turn southwest on lease road and go approximately 1.2 miles past Skelly #25, and go 440' to location.

#### 2) Planned Access:

A. <u>Length and Width:</u> A road 440' long and 20' wide will be constructed from the existing access road west to the well site. Extra width may be needed in the turns.

Application for a buried pipeline will be made if it becomes necessary.

- B. <u>Construction:</u> The new road will be 20' wide with a center crown, with 6 inches compacted caliche. The existing roads will be lightly graded and topped with compacted caliche as needed.
- C. <u>Turnouts:</u> None required.
- D. <u>Culverts:</u> None required.
- E. Cuts and Fills: The area has small sand dunes and deflation basins to be leveled.
- F. Gates and Cattleguards: None required.

#### 3) Location of Existing Wells:

Existing wells within a one-mile radius of the proposed well are shown on Exhibit "F".

#### 4) Location of Existing and/or Proposed Facilities:

- A. There are production facilities on the Skelly Unit at this time. See Exhibit "F".
- B. If the oil well proves to be commercial, the necessary production facilities will be installed on the drilling pad, and flow lines will be installed along the proposed and existing roads to the production facilities and storage tanks.

#### 5) Location and Type of Water Supply:

The Wiser Oil Company plans to drill the proposed well with fresh and brine water which will be obtained from commercial sources. The water will be transported over proposed and existing access roads.

#### 6) Source of Construction Materials:

Caliche for surfacing access roads and the wellsite pad will be obtained from the location itself or from BLM pits in the area.

#### 7) <u>Method of Handling Waste Material:</u>

- A. Drill cuttings will be disposed of in the reserve pits.
- B. Drilling fluids will be allowed to evaporate in the reserve pits until the pits are dry.
- C. All pits will be fenced with normal fencing materials to prevent livestock from entering the area.
- D. Water produced during operations will be collected in tanks until hauled to an approved disposal system.
- E. Oil produced during operation will be stored in tanks until sold.
- F. The Wiser Oil Company will comply with current laws and regulations pertaining to the disposal of human waste.

- G. All waste materials will be contained to prevent scattering by the wind and will be removed from the well site within 30 days after drilling and/or completion operations are finished.
- 8) Ancillary Facilities: None required.

#### 9) Well Site Layout:

- A. Exhibit "G" shows the relative location and dimensions of the well pad, reserve pits, and major rig components. The pad and pit area have been staked and flagged.
- B. Mat Size: 140' X 210' plus reserve pits.
- C. Cut & Fill: Only minor leveling of the drilling site is anticipated.
- D. The surface will be topped with compacted caliche and the reserve pits will be plastic lined.

#### 10) Plans for Restoration of the Surface:

- A. After completion of drilling and/or completion operations, all equipment and other material not needed for operations will be removed. Pits will be filled and the location cleaned of all trash and junk to leave the well site in as aesthetically pleasing a condition as possible.
- B. Any unguarded pits containing fluids will be fenced until they are filled.
- C. If the proposed well is non-productive, The Wiser Oil Company will comply with all rehabilitation and/or vegetation requirements of the Bureau of Land Management, and such rehabilitation will be accomplished as expeditiously as possible. All pits will be filled and leveled within 90 days after abandonment.

#### 11) Other Information:

A. <u>Topography:</u> The wellsite and access road are located in the Querecho Plains. The site is relatively flat.

#### B. Soil:

The proposed location, access road, and production facilities consist of sandy soil. Slope in the proposed area ranges from zero (0) to five (5) degrees.

#### C. Flora and Fauna:

Vegetation is one of a grassland environment and a scrub-grass, scrub disclimax community. The wildlife consists of rabbits, coyotes, rattlesnakes, lizards, dove, quail, and other wildlife typical of the semi-arid desert land.

D. <u>Ponds and Streams:</u> There are no ponds, lakes, streams, or feeder creeks in the immediate area.

#### E. Residences and Other Structures:

There are no occupied residences or other structures on or near the proposed location.

- F. <u>Land Use:</u> The land is used for grazing cattle.
- G. <u>Surface Ownership</u>: The surface is owned by the United States of America under Federal Grazing Lease #GR306664 to Olane Caswell (Caswell Ranches).

#### H. <u>Archaeological, Historical, and Other Cultural Sites:</u>

Desert West Archaeological Services has conducted an archaeological survey of the proposed Skelly Unit #192 well which covers the drilling location, production facilities, and access road, including a corridor along said access road for power and flow lines. Their report will be filed with the BLM under separate cover.

#### I. Operator's Senior Representative:

Glendale Howard
The Wiser Oil Company
8115 Preston Road, Suite 400
Dallas, Texas 75225
(214) 265-0080
FAX (214) 373-3610

### J. Person in Charge of Overall Project:

Matt Eagleston The Wiser Oil Company 8115 Preston Road, Suite 400 Dallas, Texas 75225 (214) 265-0080 FAX (214) 373-3610

## K. <u>Person in Charge of Drilling Operations:</u>

Matt Eagleston The Wiser Oil Company 8115 Preston Road, Suite 400 Dallas, Texas 75225 (214) 265-0080 FAX (214) 373-3610

#### **CERTIFICATION**

I hereby certify that I have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in the plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by The Wiser Oil Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Michael R. Burch, CPL, Agent for The Wiser Oil Company


J. O. Easley, Inc.

P. O. Box 1796

Roswell, New Mexico 88202-1796

(505) 623-3758 FAX (505) 623-3797

Date: 11-20-96

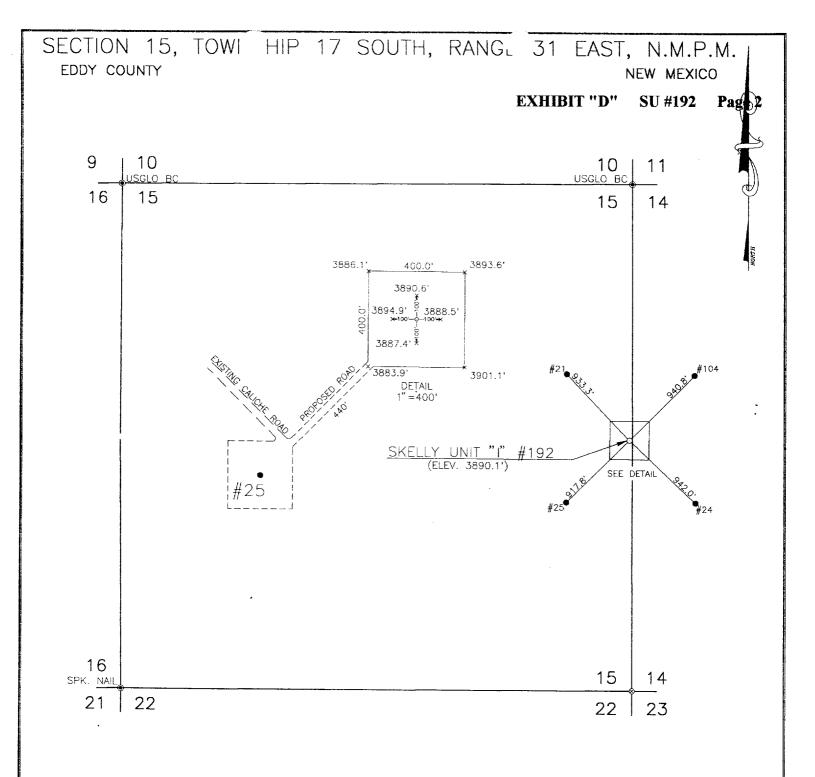

#### LEGEND

- DENOTES FOUND MONUMENT.
- - DENOTES EXISTING WELL
- - DENOTES PROPOSED WELL
- × DENOTES SPOT ELEVATION

1000 0 1000 2000 FEET

## THE WISER OIL COMPANY

THE SKELLY UNIT " #192 LOCATED 2630 FEET FROM THE SOUTH LINE AND 17 FEET FROM THE EAST LINE OF SECTION 15, TOWNSHIP 17 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO.

Survey Date: AUC	G. 16, 1996	Sheet	1	of	1	Sheets
W.O. Number: 96	Drawn E	By:	CI	OG		
Date: 8-20-96	DISK: WISE	R-03	Г	FILE: \	MISO	975


JOHN W. WEST ENGINEERING COMPANY CONSULTING ENGINEERS & SURVEYORS - HOBBS, NEW MEXICO

# LOCATION VERIFICATION MAP

Paved Highway

Existing Access Road

Proposed Access Road

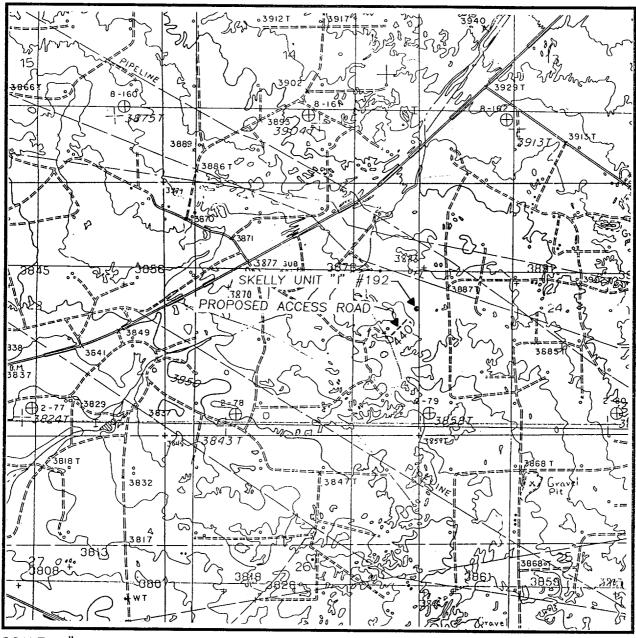


SCALE: 1" = 2000'

CONTOUR INTERVAL: MALJAMAR - 10'

SEC. <u>15</u> TWP. <u>17-S</u> RGE. <u>31-E</u>
SURVEYN.M.P.M.
COUNTYEDDY
DESCRIPTION 2630' FSL & 17' FEL
ELEVATION3890'
OPERATOR THE WISER OIL COMPANY
LEASE. SKELLY UNIT "I"
U.S.G.S. TOPOGRAPHIC MAP
<u>MALJA</u> MAR, N.M.

JOHN WEST ENGINEERING HOBBS, NEW MEXICO (505) 393-3117


# VICINITY MAP

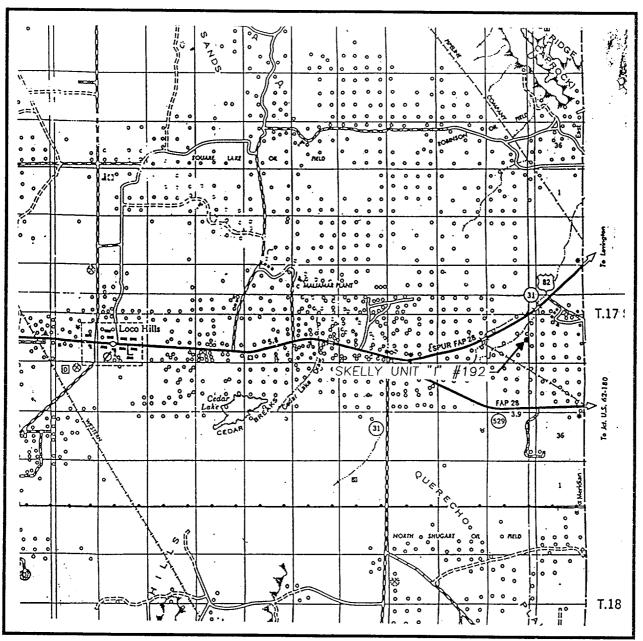



SCALE: 1" = 2 MILES

SEC. <u>15</u> TW	P. <u>17-S</u> RGE. <u>31-E</u>
SURVEY	N.M.P.M.
COUNTY	EDDY
DESCRIPTION_	2630' FSL & 17' FEL
ELEVATION	3890'
OPERATOR THE	E WISER OIL COMPANY
LEASE	SKELLY UNIT "I"

JOHN WEST ENGINEERING HOBBS, NEW MEXICO (505) 393-3117

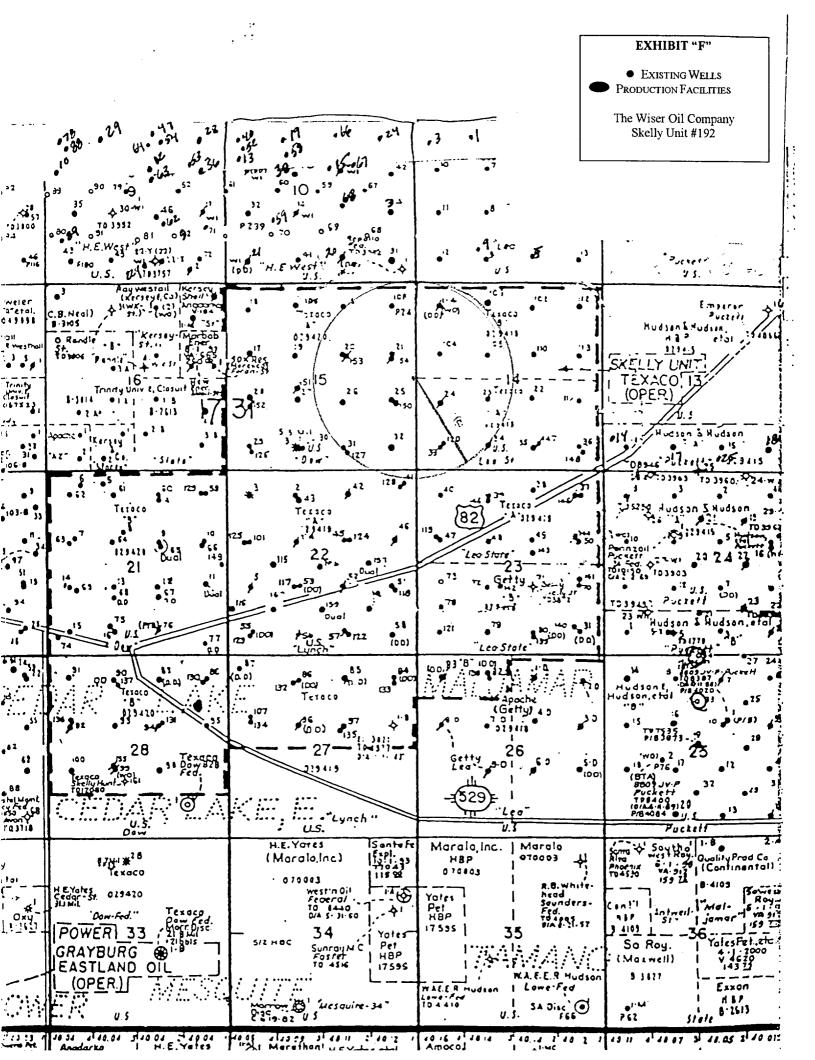

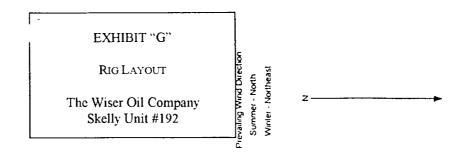

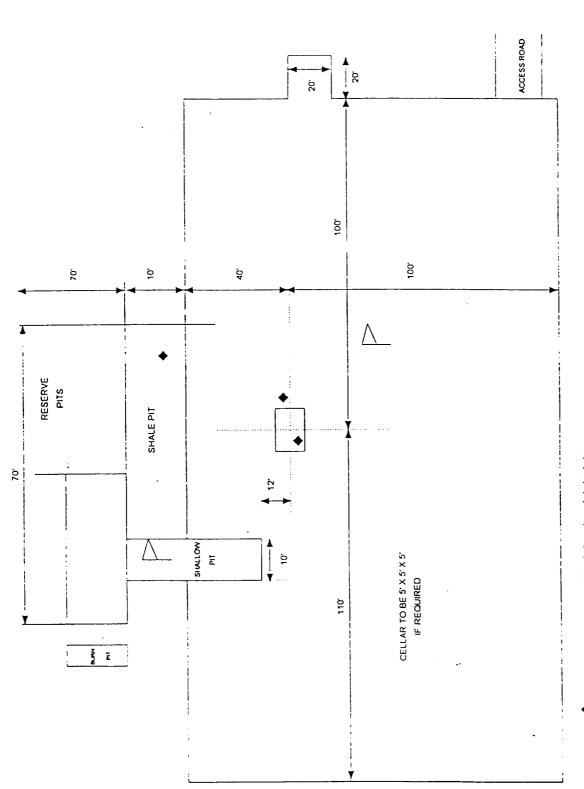

H2S Monitors with alarms at the bell nipple and shale shaker

Vind Direction Indicators

. Safe Briefing areas with caution signs and protective breathing

equipment. Min 150 ft from wellhead

