


30-015-00196

OGRID	6137
PROP	25883
POOL	3610

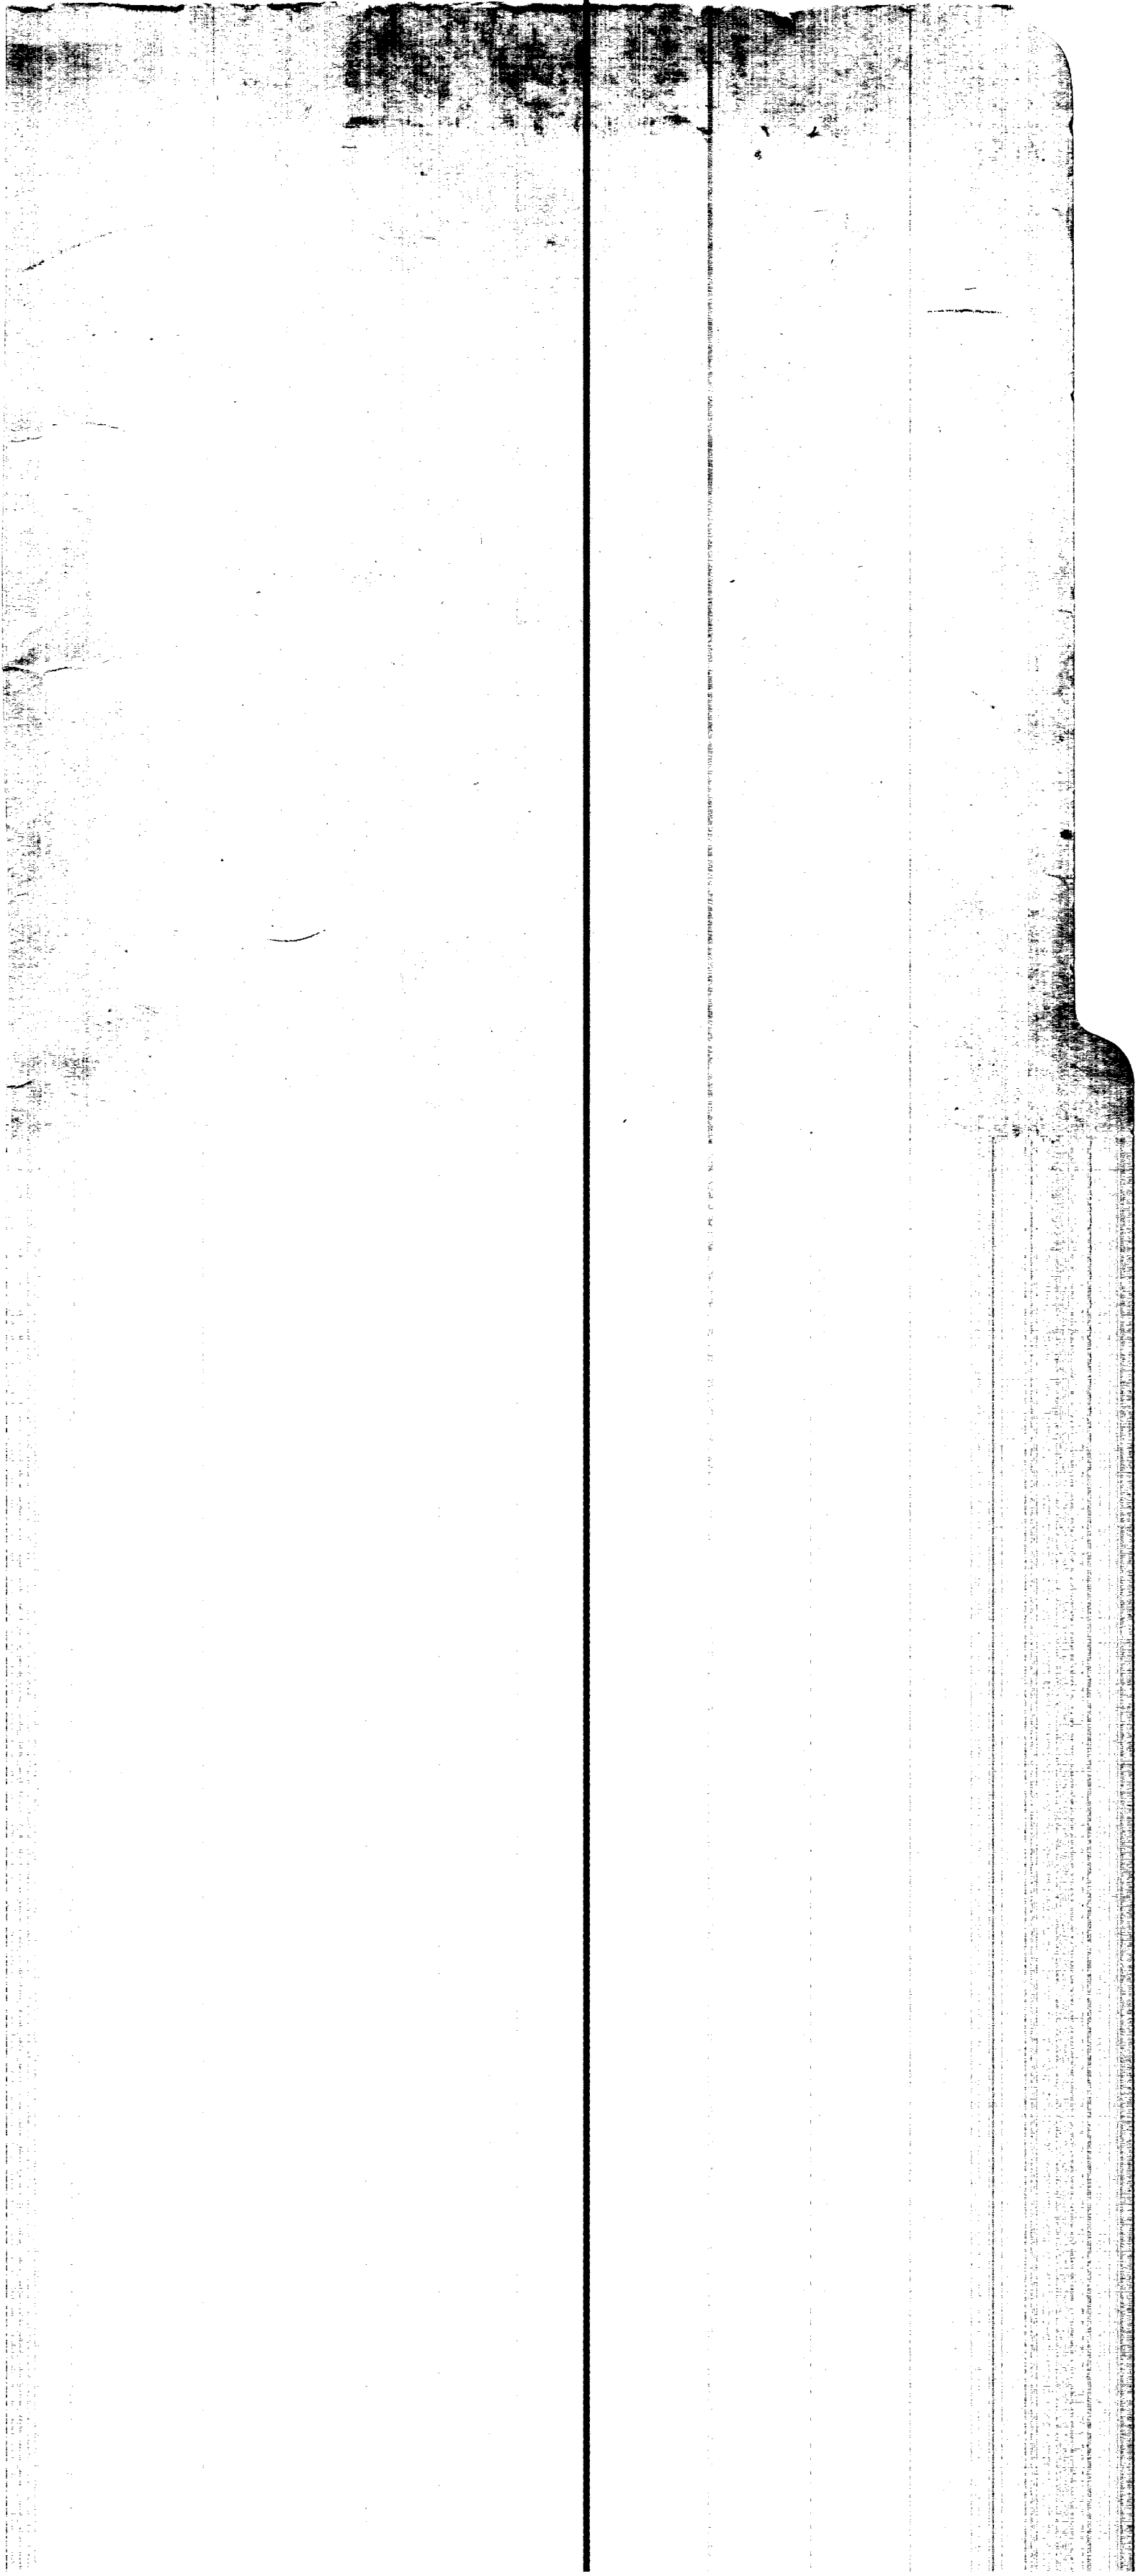

30-015-00196

OGRID 6137
PROP 25883
POOL 3610

P Injection is to be through the 23 authorized water injection wells each of which shall be equipped with tubing set in a packer, said packers to be set within 100 feet of the uppermost perforation. The casing-tubing annulus in each well shall be loaded with a corrosion-inhibited fluid and shall be left open or equipped with a pressure gauge to facilitate detection of leakage in the tubing, casing or packer.

www order # R-3476

