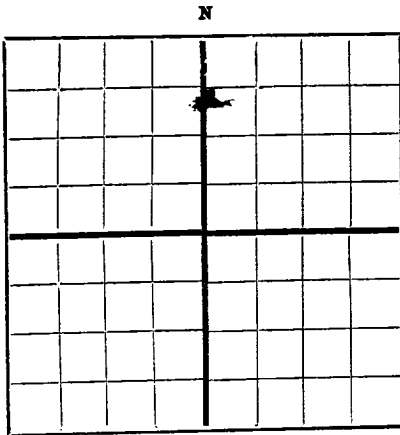


OIL CONSERVATION COMMISSION
1949Oil Cons. Comm.
Artesia OfficeNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New MexicoAREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM O-105 IS PROPERLY FILLED OUT.

Collier & Bassett Company or Operator Box 798, Artesia, New Mexico Address
Williams Well No. 6 in NW 1/4 of Sec. 25, T. 18
Lease
R. 26, N. M. P. M., Dayton Field, Eddy County.
Well is 990 feet south of the North line and 2623 feet west of the East line of 25 18 26
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Williams Estate Address Salisbury, Missouri
If Government land the permittee is Address
The Lessee is Collier & Bassett Address Box 798, Artesia, N.M.
Drilling commenced 1/25/ 1949 Drilling was completed 7/1/ 1949
Name of drilling contractor M.S. Bruning & Kersay & Co. Address Artesia, N.M.
Elevation above sea level at top of casing 3285 feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 1063 to 1073 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7"	20#	10	SH	946'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
7"		946	125	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	85		Gyp & Fine river sand
85	95		Water sand
95	130		Soft gyp rock
130	208		Gyp w/streaks red clay
208	835		Gyp w/streaks red sand & clay
835	900		Soft lime rock w/streaks red sand
900	928		Hard Gray lime
928	962		95% Anh 5% gray sand
962	992		Buff & Pink Dolo.
992	1013		F.X. Dolo.
1013	1022		Gray cemented sand
1022	1033		Anhydrite
1033	1046		Pink Dolo.
1046	1063		Pink Dolo.
1063	1075		Oil Sand 20% stained