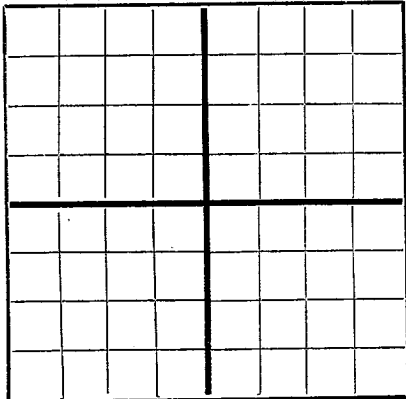


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Company or Operator Jones & Perkins Address Artesia, New Mexico
Lease Platt Well No. 2 in Section of Sec. 26, T. 13 S.
R. 26 S., N. M. P. M. Section 26 Field, 38d County.
Well is 1650 feet south of the North line and 390 feet east of the East line of Section 26.
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is _____, Address _____
If Government land the permittee is _____, Address _____
The Lessee is _____, Address _____
Drilling commenced April 29, 1943 Drilling was completed May 31, 1943
Name of drilling contractor W. J. Climey, Address Artesia, New Mexico
Elevation above sea level at top of casing _____ feet.
The information given is to be kept confidential until _____ 19____.

OIL SANDS OR ZONES

No. 1, from 1082 to 1070 No. 4, from _____ to _____
No. 2, from 1085 to 1080 No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 720 to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
3"	24			101'					
7"				107'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
	7"	1072'	550	Williarben		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Nitro-Glyc	20 qts	7-20-43	1080'	1080'

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to 390 feet, and from _____ feet to _____ feet
Cable tools were used from 06 feet to 390 feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing _____, 19____
The production of the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

_____, Driller W. J. Climey, Driller
_____, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 20th day of June, 1943.

Notary Public
My Commission expires 2-12-44

Place Artesia, New Mexico Date June 20, 1943
Name Stanley J. Jones
Position Partner
Representing Jones & Perkins
Company or Operator
Address Box 404, Artesia, N. M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	2	2	Top Soil
2	60	58	Top of Caliche
60	70	10	Water Sand
70	131	61	Red Clay with ssp shells
131	200	69	Top of Sand Shells
200	300	100	Marlstone clay
300	433	133	Heavy Clay
433	513	80	Light Clay
513	543	30	Rotash
543	543	0	Blue Shale (Red ed)
543	600	57	Red clay with ssp shells
600	600	0	Blue Clay with ssp shells
600	720	120	Heavy
720	760	40	Water Sand (artesian water)
760	770	10	Red Sand
770	800	30	Lime Shells
800	803	3	Red Sand
803	825	22	Limestone
825	882	57	Red Shale
882	896	14	Limestone with red sand points
896	900	4	Limestone
900	907	7	Anhydrite
907	942	35	Brown lime
942	960	18	Brown lime
960	988	28	Sandy Gray lime (gas 960 to 988)
988	1040	52	Gray lime
1040	1048	8	Brown Sand
1048	1062	14	Red Sand
1062	1076	14	Sandy lime (show of oil at 1073')
1076	1090	14	Oil Sand (hole filling at 1088 to 1090)
1090	1100	10	Gray lime