

**NEW MEXICO STATE LAND OFFICE**  
**SANTA FE, NEW MEXICO**

**DEPARTMENT OF THE STATE GEOLOGIST**  
**NEW MEXICO SCHOOL OF MINES**  
**SOCORRO, NEW MEXICO**

**NOTICE OF INTENTION TO DRILL NEW WELL**


Notice must be given to the State Geologist or to the proper Oil and Gas Inspector and approval obtained before drilling begins. If changes in the proposed plan are considered advisable a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval.

Mr. L. E. Wells, State Geologist. Casper, Wyo., 3-2-27 19\_\_

Socorro, N. Mex.

Dear Sir: you are hereby notified that it is our intention to commence the drilling of a well to be known as

Terry Well No. 1 in NE 1/4 of Sec. 15  
 T. 10 S., R. 26 E., N. M. P. M., Dayton Oil Field  
Blair County.

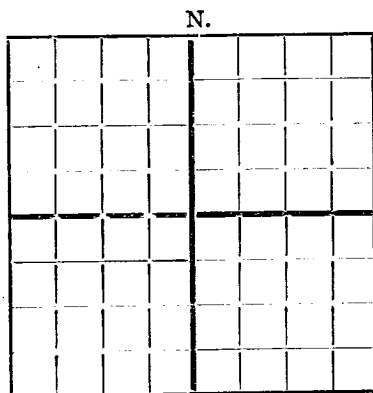

AREA 640 ACRES  
 LOCATE WELL CORRECTLY

The well is 210 feet (N.) of North line and 150 feet (S.)

(E.)

(W.)

of west line of the Section

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. \_\_\_\_\_

Assignment No. \_\_\_\_\_

If patented land the owner is J. D. Terry

Address Dayton, New Mexico

The lessee is The Midwest Refining Company Address Casper, Wyo.

The elevation of the derrick floor above sea level is \_\_\_\_\_ feet. We propose to drill well with No. Standard rotary rig to 850'; National machine and cable tools to completion of well.

Make of Drill

We propose to use the following strings of casing and to land or cement them as indicated.

Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented
<u>16 1/2"</u>	<u>70#</u>	<u>New</u>	<u>As much as necessary for conductor</u>	
<u>12 1/2"</u>	<u>50#</u>	<u>"</u>	<u>550'</u>	<u>Landed</u>
<u>10"</u>	<u>45#</u>	<u>"</u>	<u>850'</u>	<u>Cemented</u>
<u>8"</u>	<u>28#</u>	<u>"</u>	<u>1200'</u>	<u>Landed (Will cement if</u>
<u>6 5/8"</u>	<u>20#</u>	<u>"</u>	<u>2200'</u>	<u>Landed (necessary)</u>

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 900 feet.

Additional information: Will protect all oil, gas or artesian water horizons against migration and intrusion of contents, and test all oil and gas production encountered, in accordance with best oil field practice and the Laws and Regulations of the State of New Mexico.

Sincerely yours,

THE MIDWEST REFINING COMPANY

Company or Operator.

Approved March 13, 1927

Except as follows:

By A. L. Haller

Position Gen'l Supt. Prod. Dept.

Send communication regarding well to

Name Same

Address Casper, Wyo.

A. L. Haller  
 State Geologist or Oil and Gas Inspector.