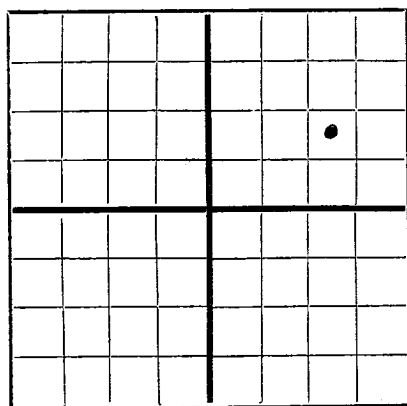


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Butter and Wilbanks Brothers 706 El Paso National Bank Building, El Paso, Tex.
Company or Operator Address
Turner Well No. 1 in SE 1/4 of NE 1/4 2, T. 18S
Lease
R. 27E, N. M. P. M. Empire Field, Eddy County.
Well is 1650 feet south of the North line and 990 feet west of the East line of Section
If State land the oil and gas lease is No. B-9391 Assignment No. 2
If patented land the owner is _____, Address _____
If Government land the permittee is _____, Address _____
The Lessee is Fred Turner, Jr., Address Midland, Texas
Drilling commenced February 20 19 48 Drilling was completed April 1st 19 48
Name of drilling contractor Brewer Drilling Company, Address Artesia, New Mexico
Elevation above sea level at top of casing _____ feet.
The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7"	20#	8		1480'	Larkin				Shut off water

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
8"	7"	1471' 1742'	30	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
1 1/2"	Zero Hour	Nitroglycerin	200 lbs	3/26/48	51'	1742'

Results of shooting or chemical treatment 20' gravel on shot—40' of calseal on gravel

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing _____, 19 _____
The production of the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

R. A. Perry, Driller W. C. Cox, Driller
C. E. Geisler, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 16day of June, 19 48

Notary Public

My Commission expires _____

C. BERRY, Notary Public
and for El Paso County, Texas
Expires June 1, 1949

El Paso, Texas June 15, 1948

Name Elysebeth PickhamPosition Office ManagerRepresenting Butter & Wilbanks Brothers

Company or Operator

Address 706 El Paso National Bank BuildingEl Paso, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	65	65	Anhydrite
65	76	9	Drilling wire
76	105	29	Anhydrite-broken
105	128	23	Anhydrite
128	142	14	Anhydrite & lime shells
142	162	20	Anhydrite
162	222	60	Red Rock and Anhydrite Shells
222	240	18	Anhydrite-hard
240	280	40	Anhydrite-broken
280	340	60	Anhydrite
340	367	27	Anhydrite & Lime Shells
367	402	25	Anhydrite
402	410	8	Lime
410	460	50	Anhydrite
460	470	10	Lime
470	475	5	Blue Shale
475	555	80	Anhydrite
555	582	27	Lime-gray
582	607	25	Anhydrite & Lime Shells
607	623	16	Anhydrite
623	631	8	Lime
631	651	20	Anhydrite & Lime Shells
651	738	67	Anhydrite
738	747	9	Lime
747	804	57	Anhydrite
804	846	40	Anhydrite
846	905	59	Anhydrite-broken
905	931	26	Anhydrite & Lime Shells
931	962	31	Anhydrite-broken
962	967	5	Anhydrite
967	982	15	Red Sand
982	990	8	Red Shale
990	1005	15	Anhydrite
1005	1012	7	Anhydrite-broken
1012	1035	23	Anhydrite
1035	1055	20	Anhydrite & Lime Shells
1055	1063	8	Anhydrite
1063	1071	8	Lime
1071	1081	10	Anhydrite
1081	1111	30	Anhydrite-broken
1111	1133	22	Anhydrite & Lime Shells
1133	1143	12	Anhydrite Lime
1143	1154	9	Anhydrite-broken
1154	1202	48	Anhydrite
1202	1218	16	Lime & Anhydrite
1218	1235	17	Sand Show of oil 1218 to 1232
1235	1247	12	Red Rock
1247	1256	9	Sandy Shale-gray
1256	1273	17	Anhydrite-broken
1273	1280	7	Anhydrite
1280	1291	11	Red Rock
1291	1306	15	Anhydrite-broken
1306	1328	22	Anhydrite
1328	1390	62	Anhydrite-broken
1390	1428	38	Anhydrite
1428	1452	24	Lime-gray
1452	1471	18	Lime (Ran 1480' 7" at 1471'-3' collar plus 12' thuds)
1471	1476	5	Lime-gray
1476	1522	46	Lime
1522	1535	13	Lime-gray
1535	1545	10	Lime
1545	1585	40	Lime-gray
1585	1603	18	Lime
1603	1616	13	Lime-gray
1616	1626	10	Lime-brown
1626	1664	38	Lime (odor gas at 1635')
1664	1674	10	Lime-brown
1674	1682	8	Lime-gray
1682	1694	12	Lime
1694	1710	16	Sand Show of oil and Gas
1710	1711	1	Lime
1711	1717	6	Lime-pink
1717	1722	5	Lime-gray
1722	1727	5	Lime-sandy (300' of oil in the hole)
1727	1741	14	Lime (475' of oil in the hole)
1741	1742	1	Lime (shot 1691 to 1742' 200 qts Nitroglycerin)
1742			Ran 1209' 2" tubing