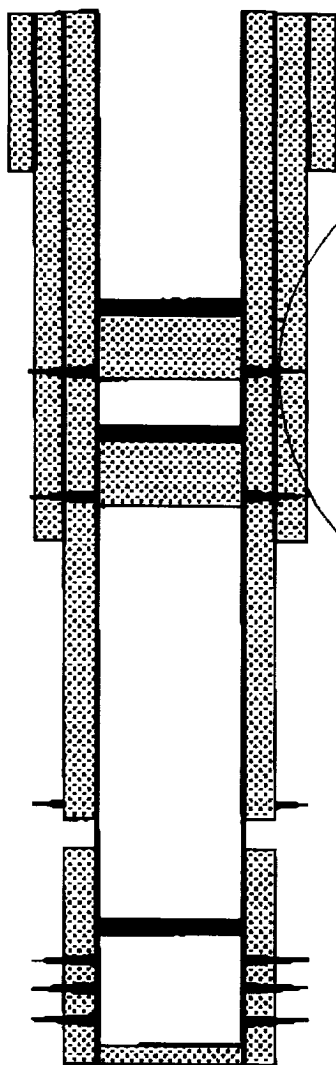


SL CARLETON
405/552-4528

DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

WELL NAME: WEST RED LAKE UNIT #6			FIELD: RED LAKE			
LOCATION: 2460' FSL & 2580' FWL, SEC 7-T18S-R27E			COUNTY: EDDY			STATE: NM
ELEVATION: GL=3294'; KB=UNK			SPUD DATE: 04/15/48		COMP DATE: 06/30/48	
API#: 30-015-00813		PREPARED BY: C.H. CARLETON			DATE: 02/07/02	
	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 163'	9 5/8"				
CASING:	0' - 1105'	7"				
CASING:	0' - 1776'	4 1/2"	9.5#	J-55	LT&C	6 1/4"
TUBING:						
TUBING:						


☒ CURRENT

☐ PROPOSED

OPERATOR: DEVON ENERGY PRODUCTION COMPANY, L.P.

9 5/8" CASING @ 163' W/150 SXS. TOC @ SURFACE.

CEMENT RETAINER @ 650'. PUMPED 200 SXS BELOW RETAINER

PERFORATE: 750'-751' W/4 HOLES

CEMENT RETAINER @ 906'. PUMPED 100 SXS BELOW RETAINER

PREMIER PERFORATIONS: 998'-1007'(OA) - 18 HOLES

7" CASING @ 1105' W/100 SXS. TOC @ 670' (calculated)

DETAIL OF PERFORATIONS

PREMIER: 998'-1007'(2 SPF)

SAN ANDRES: 1582'-1592'(3 SPF), 1640'-1655'(3 SPF), 1688'-1691'(3 SPF),
1740'-1754'(1 SPF)

PERF & SQUEEZE: 1350'-1351'(4 SHOTS) W/150 SXS. TOC @ SURFACE.

CIBP @ 1500'

SAN ANDRES PERFORATIONS: 1582'- 1754' (OA) - 108 HOLES

PBTD @ 1770'

4 1/2" CASING @ 1776' W/135 SXS. TOC @ 1450' (TEMP SURVEY)

TD @ 1776'

OK to pump cement from 213 to surface to plug