


artesian file

FORM C-105

N

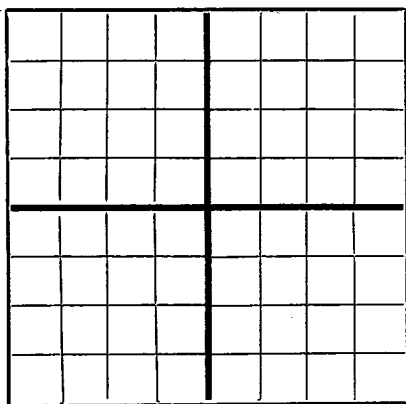

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Weier Drilling Company
Company or Operator
Gilbert
Lease
Well No. #1 in NE 1/4 SW 1/4 of Sec. 7, T. 18-South, R. 27-East, N. M. P. M. Empire Field, East Eddy County.
Well is 2046 feet south of the North line and 2622 feet west of the East line of Section 7.
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Gilbert Address Artesia, New Mexico
If Government land the permittee is Address
The Lessee is Weier Drilling Company Address Box 716, Monahans, Texas
Drilling commenced March 29th 19 48. Drilling was completed April 8th 19 48.
Name of drilling contractor Bob Johnson Address Artesia, New Mexico
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from NONE to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 765 to 814 feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
XXXXXX				XXX					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
	9-5/8"	175'	XX 75			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from -0- feet to 1068 feet, and from feet to feet

PRODUCTION

Put to producing NONE, 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

R. L. Bowman Driller W. H. Johnson Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 17th day of April 19 48
Notary Public
My Commission expires 4/3/52
Artesia, New Mexico 4/17/48
Place Date
Name Weier Drilling Company
Position A. S. Weier President
Representing Weier Drilling Company
Company or Operator
Address Box 716, Monahans, Texas

WELL PLUGGED & ABANDONED.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	108	108	Sand Gravel
108	138	30	Sand & Clay Shells
138	159	21	Gravel & gyp shells
159	169	10	Lime shells
169	174	5	Lime & gyp shells
174	178	4	Blue shale
178	244	66	Gyp rock
244	259	15	Gyp & red bed
259	304	45	Gyp & clay
304	400	96	Lime gyp
400	451	51	Shale & shells
451	480	29	Shale & shells
480	543	63	Shale & yellow clay
543	574	31	White Lime
574	613	39	Shale & red clay
613	670	57	Shale & Shells
670	760	90	Shale Red Clay (Soft)
760	765	5	Sand
765	814	49	Water Rock (Water)
814	828	14	Lime
828	868	40	Grey Lime
868	900	32 32	Grey lime
900	909	9	Grey Lime
909	913	4	Sand (Red)
913	934	21	Sandy Lime
934	955	21	Lime Grey
955	980	25	Lime
980	985	5	Lime
985	1010	25	Lime
1010	1025	15	Lime
1025	1030	5	Lime
1030	1041	11	Anhydrite
1041	1063	22	Broken lime
1063	1068	5	Lime - Anhydrite - TOTAL DEPTH.