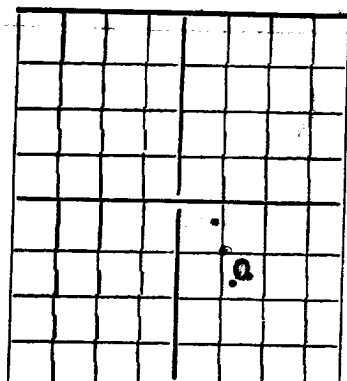


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (Q). SUBMIT IN TRIPlicate. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Weier Drilling Company

Company or Operator

Box 716, Monahans, Texas

Kaiser

Well No. 3

Address

in SE 1/4 of Sec. 7, T. 18S

R. 27E, N. M. P. M., North Empire Field, Eddy County.

Well is 1650 feet North of the South line and 1650 feet west of the East line of Sec. 7, 18S 27E

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is A. A. Kaiser, Address Artesia, N. M.

If Government land the permittee is, Address

The Lessee is, Address

Drilling commenced Nov. 16, 1948 Drilling was completed December 12, 1948

Name of drilling contractor Western Drilling Co., Address Artesia, N. M.

Elevation above sea level at top of casing 3420 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 1596 to 1602 (Show of oil) No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 797 to 815 feet. Water sand

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
9 5/8"	36#	8	Natl	114'	Texas	Cemented with 50 ex. cement		
						9 5/8" pipe left in hole		
7"	20#	8	"	1240'	"	Cemented with 75 ex. cement		
						555' of 7" left in hole		

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
7"	7" CD	1240'	75 sz	Halliburton	About 10#	100 sacks
Ran Tubing at 855' - Pumped in 100 sz. mud - Spotted 25 sz. cement - Raised						
Tubing to 550' - Spotted 25 sz. cement at 550' - Used Halliburton method.						

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
No shot		Acid	1000 gal	12/15/48	1576 to	No increase
		Dowell Chemical Co.			1622'	

Results of shooting or chemical treatment No increase in oil after treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

Test of about 30 gallons of oil in 24 hours TOOLS USED

Rotary tools were used from Surface feet to 1240' feet, and from feet to feet

Cable tools were used from 1240' feet to 1626' feet, and from feet to feet

PRODUCTION

Put to producing Dry hole, 19

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Tom Robinson, Artesia, Driller, Driller

Jim Vowell, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Monahans, Texas January 8th 1949

Subscribed and sworn to before me this 8th

day of January, 1949

Name Weier Drilling Company

Position A. D. Vowell President

Representing Weier Drilling Company

Company or Operator

Address Box 716, Monahans, Texas

John G. Crawford, Notary Public.

Ward County, Texas

My Commission expires June 1st 1949

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	33	33	Sand
33	90	57	Shale
90	114	24	Shale & Anhydrite
114	293	179	Red Shale & Shells
293	450	157	" " "
450	480	30	Anhydrite
480	687	207	Shale
687	700	13	Anhydrite
700	790	90	Shale
790	796	6	Line
796	815	19	Water Rock, Water from 797 to 815
815	900	85	Grey Line
900	957	57	Brown Line
957	990	33	Grey Line
990	1075	85	Grey & Brown Line
1075	1134	59	Grey Line
1134	1250	116	Brown Line
1250	1307	57	Grey & Brown Line
1307	1371	64	Brown Line
1371	1395	24	Grey Line
1395	1455	60	Brown Line
1455	1462	7	Brown Line - Show of gas
1462	1520	58	Black Line
1520	1596	76	Brown Line
1596	1602	6	Brown Line - Show of oil
1602	1614	12	Anhydrite & Brown Line
1614	1626	12	Brown Broken Line
	1626		Total depth.