

Form 9-331  
(May 1963)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE\*  
(Other instructions on reverse side)

Form approved.  
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM 025604

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

## SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)

SEP 14 1965

1.

OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

O. C. C.  
ARTESIA, OFFICE

3. ADDRESS OF OPERATOR

San American Petroleum Corp

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.  
See also space 17 below.)  
At surfaceBox 68 Hobbs, N.M. 88240  
1980' FNK X 1980' FEL, Sec. 9. (Unit G, SE/4 NE/4)

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

MALCO REFINERIES - "G" F. R. R.

9. WELL NO.

10.

10. FIELD AND POOL, OR WILDCAT

EMPIRE ABO

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

9-18-27 N.M.P.M

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3542' R. D. B.

12. COUNTY OR PARISH

EDDY

13. STATE

N.M.

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

## NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON\*

CHANGE PLANS

## SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT\*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting and proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

In an effort to reduce high GOR the following remedial work was performed.

"Squeezed perforations 5500-10 w/ 200 sl Incon x 6" Hald 9. Drilled + cleaned out to PBD-5664. Acidized perforations 5520-5594 w/ 2000 gal 15% tank 1000 gal LSTNE. Restored to production.

Prior to work. Flw 158 BO X OBW, 24 hr. GOR 4063.  
After- Flw 67 BO X OBW, 24 hr. GOR 6390.

OC 7/20/65, Comp 9/8/65.

TD-5700, PBD-5664, 4 1/2" CSA 5700, Perfs: 5520-30, 5542-54, 5564-70, 5582-94.

18. I hereby certify that the foregoing is true and correct

SIGNED


TITLE

DATE

(This space for Federal or State office use)

TITLE

DATE

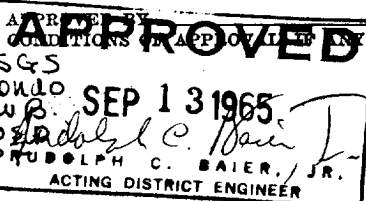

\*See Instructions on Reverse Side