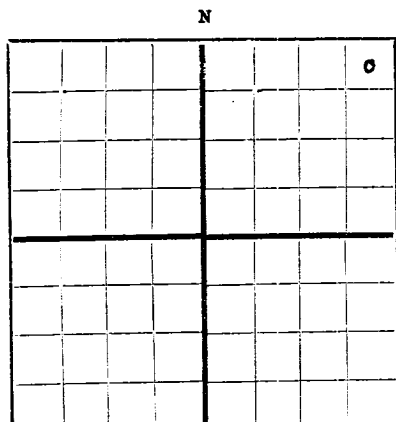
NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New MexicoOil Conserv. Comm.
Artesia Office

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Stanley L. Jones, Inc. Box 464, Artesia, New Mexico
Company or Operator Address
27 Jones St. Well No. 15 in NE 1/4 of Sec. 26, T. 18S
R. 27 E, N. M. P. M., Artesia Field, Eddy County.
Well is 330 feet south of the North line and 330 feet west of the East line of Sec. 26, T. 18 S., R. 27 E.
If State land the oil and gas lease is No. B-11083 Assignment No.
If patented land the owner is, Address.
If Government land the permittee is, Address.
The Lessee is, Address.
Drilling commenced March 9, 1950. Drilling was completed April 2, 1950.
Name of drilling contractor Brewer Drilling Company Address Artesia, New Mexico
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 1897 to 1956 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from at 180 to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
2 1/2"	24			490'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
10	2 1/2"	490'	50			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5 1/2"		S. O. T. E.	350	4/3/50	1885-1956	1463

Results of shooting or chemical treatment increased from 10 to 50 barrels.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 2010 feet, and from feet to feet

PRODUCTION

Put to producing April 18, 1950.
The production of the first 24 hours was 50 barrels of fluid of which 100% was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

H. C. Garner, Driller McDorman, Driller
H. C. Cox, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 31st day of May, 1950.
Artesia, New Mexico May 31, 1950
Place Date
Name James R. Garner
Position Secretary
Representing Stanley L. Jones, Inc.
Company or Operator
My Commission expires 2-19-52 Address Box 464

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	9	9	soil
9	65	56	caliche
65	150	85	red bed
150	175	25	anhydrite
175	200	25	red rock
200	215	15	anhydrite
215	220	5	sand, water
220	335	115	anhydrite
335	410	75	anhydrite, broken
410	494	84	anhydrite
494	540	46	anhydrite, broken, red bed
540	585	45	anhydrite and shale
585	665	80	anhydrite, broken
665	1000	335	anhydrite
1000	1040	40	anhydrite and shale
1040	1145	105	anhydrite broken
1145	1180	35	anhydrite
1180	1220	40	anhydrite, broken
1220	1290	70	anhydrite
1290	1303	13	red sand
1303	1314	11	sand and anhydrite
1314	1325	11	sand and red shale
1325	1360	35	anhydrite
1360	1395	35	anhydrite, broken
1395	1400	5	anhydrite
1400	1407	7	lime, grey
1407	1412	5	anhydrite
1412	1420	8	lime, grey
1420	1465	45	anhydrite
1465	1480	15	anhydrite and lime
1480	1510	30	anhydrite and lime shells
1510	1560	50	anhydrite
1560	1570	10	anhydrite and sand
1570	1580	10	sand, grey
1580	1610	30	anhydrite
1610	1643	33	red shale and anhydrite
1643	1650	7	anhydrite and sand
1650	1660	10	lime and anhydrite
1660	1675	15	lime, brown
1675	1685	10	anhydrite and red shale
1685	1710	25	lime, brown
1710	1725	15	red shale and lime
1725	1755	30	lime, brown
1755	1763	8	lime, grey
1763	1770	7	lime, brown
1770	1799	29	lime, grey, 1785-94 show of gas
1799	1809	10	red shale
1809	1828	19	lime, grey
1828	1834	6	lime, white
1834	1852	18	lime, grey
1852	1869	17	lime, grey and sandy
1869	1899	30	lime, brown
1899	1912	13	lime, grey, sand and sandy lime
1912	1920	8	lime, broken and sand, show of oil
1920	1929	9	lime, grey
1929	1942	13	sand and lime, grey
1942	1956	14	lime, sandy
1956	1960	4	lime, pink and grey
1960	1976	16	lime, grey
1976	1985	9	lime, soft and sand, increase in oil
1985	1988	3	lime, white
1988	1991	3	lime, sandy water
T. D.			
			lugged back to 1968