


cur

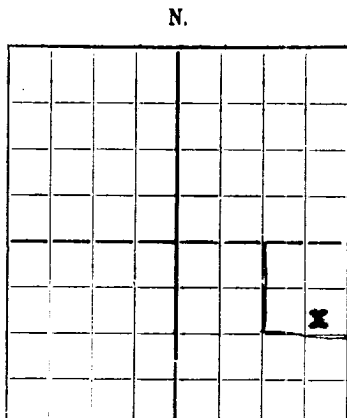

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

S. P. Yates State H
Company or Operator Lease
Well No. 1 in NE SE of Sec. 26, T. 18S
R. 27E, N. M. P. M., Artesia Field, Eddy County.
Well is 3630 feet south of the North line and 330 feet west of the East line of Section 26
If State land the oil and gas lease is No. B-11083 Assignment No.
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is G. L. Jones Address Artesia, New Mexico
Drilling commenced 7/22/51 19 Drilling was completed 9/9/51 19
Name of drilling contractor S. P. Yates Drilling Co. Address Artesia, New Mexico
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 1270 to 1971 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 242 to 260 (4 bailers per hour)
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8 5/8	24#	8	J&L	502	Guide			Surface

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10-3/4	8-5/8	502	50	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5"		Nitro	430 qts.	8/29/51	1861-1971	2020'

Results of shooting or chemical treatment Increased production from 20 bpd to 55 bpd

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet.
Cable tools were used from 0 feet to 2030 feet, and from feet to feet.

PRODUCTION

Put to producing 9/9/51 19
The production of the first 24 hours was 55 barrels of fluid of which 100 % was oil; %
emulsion: % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

R. O. Jacobs Driller T. D. Bradshaw Driller
W. F. Keith Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Artesia, New Mexico 9/12/51
Place Date
Name S. P. Yates
Position S. P. Yates, Owner
Representing S. P. Yates
Company or Operator.
Address Carner Building, Artesia, N.M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
			111111 100
	30		line
30	115		red sand, anhydrite, sand
115	221		red bed and shell
210	242		anhydrite
240	261		water sand
260	271		anhydrite
261	271		line brown
271	271		anhydrite
271	271		line brown
271	271		line and anhydrite
271	271		no description
271	271		anhydrite
271	271		line brown
271	271		anhydrite
271	271		anhydrite and line
271	271		anhydrite and
271	271		anhydrite
271	271		no description
271	271		red sand
271	271		anhydrite
271	271		anhydrite and line
271	271		anhydrite
271	271		line brown
271	271		red gray
271	271		red and anhydrite
271	271		anhydrite
271	271		line
271	271		anhydrite
271	271		line
271	271		anhydrite, sand and line
271	271		line
271	271		line and sand
271	271		line gray
271	271		line
271	271		line gray
271	271		line
271	271		line and shale
271	271		line gray
271	271		line white
271	271		line gray
271	271		line
271	271		line gray
271	271		no description
271	271		line brown, some sand
271	271		no description
271	271		line
271	271		no description
271	271		line gray, hard
271	271		line gray, soft
271	271		line gray
271	271		