


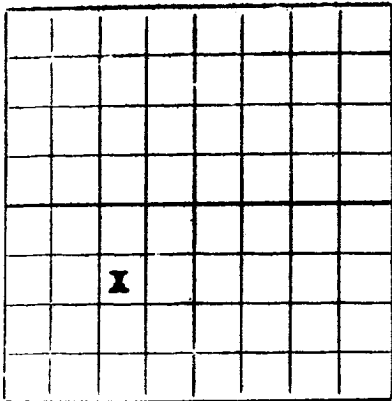

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES
LOCATE WELL CORRECTLY

S. A. Lanning

(Company or Operator)

State -

(Lease)

Well No. 7, in NE 1/4 of SW 1/4, of Sec. 3, T. 19 S, R. 28 E, NMPM.

Artesia

Pool,

Eddy

County.

Well is 1653.6 feet from South line and 2272.4 feet from West line

of Section 3-18-28 If State Land the Oil and Gas Lease No. is 647-222

Drilling Commenced 7-12-55, 19 Drilling was Completed 8-7-55, 19

Name of Drilling Contractor Kincaid & Watson Drilling Co.

Address Box 536, Artesia, N. M.

Elevation above sea level at Top of Tubing Head 3659 The information given is to be kept confidential until , 19

OIL SANDS OR ZONES

No. 1, from 2340 to 2350 No. 4, from to

No. 2, from 2405 to 2414 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 290 to 300 feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8 5/8"	28	SH	535	Larkin	None	None	Surface
5 1/2"	14	New	2459	Baker	None	2442-49	
						2395-2406	
						2332-39	

MUD LOGGING AND MUD MUD MUD RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. BAGS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8 5/8"	535	50	Halliburton		
8"	5 1/2"	2459	125	Halliburton		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Sandfrac with 15,000 # of sand & 10,000 gal of oil in each of the above three perforated sections.

Result of Production Stimulation Natural production was 9 BOPD - After treatment 60 BOPD.

Depth Cleaned Out

REPORT OF DRILLING AND CEMENTING

If drill-stem or other special tests or observations were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.
 Cable tools were used from 0 feet to 2473 feet, and from _____ feet to _____ feet.

PRODUCTION

Put to Producing 8-11-55 _____, 19____.

Oil Well: The production during the first 24 hours was 60 barrels of liquid of which _____% was
 was oil; _____% was condensate; _____% water; and _____% was sediment. A.P.I.
 Gravity _____.

Gas Well: The production during the first 24 hours was _____ M.C.F. plus _____ barrels of
 liquid hydrocarbon. Shut in Pressure _____ lbs.

Length of Time Shut in _____.

PLEASE INDICATE BELOW FORMATION TESTS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southwestern New Mexico

Southwestern New Mexico

T. Andy		T. Decatur		T. Ojo Alamo	
T. Salt	640	T. Silurian		T. Kirtland-Packard	
B. Salt	650	T. Montoya		T. Farmington	
T. Yates		T. Simpson		T. Fossiliferous	
T. 7 Rivers		T. McKee		T. Monitor	
T. Queen	1630	T. Ellington		T. Point Lookout	
T. Grayburg	2070	T. Gr. Wash		T. Mancos	
T. San Andres	2450	T. Granite		T. Dakota	
T. Glorietta		T. _____	1	T. Morrison	
T. Dockland		T. _____	2	T. Perm	
T. Tubbs		T. _____		T. _____	
T. Albo		T. _____		T. _____	
T. Perm		T. _____	1	T. _____	
T. Miss		T. _____	1	T. _____	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	10	10	Caliche	1630	1775	145	Anhydrite
10	65	55	Sand	1775	1790	15	Gray lime
65	290	225	Red bed	1790	1800	10	Red bed
290	300	10	Sand	1800	1977	177	Anhydrite
300	315	15	Anhydrite	1977	1985	8	Sand
315	480	165	Red bed	1985	2005	20	Anhydrite & lime shells
480	640	160	Anhydrite	2005	2029	24	Massive Anhydrite
640	650	10	Salt	2029	2035	6	Brown lime
650	670	20	Red bed	2035	2045	10	Anhydrite & sand
670	790	120	Anhydrite & red bed	2045	2060	15	Lime
790	845	55	Anhydrite	2060	2070	10	Lime & anhydrite
845	960	115	Anhydrite & red bed	2070	2090	20	Brown lime
960	1020	60	Anhydrite	2090	2298	208	Gray lime
1020	1100	80	Anhydrite & lime	2298	2320	22	Sandy lime
1100	1600	500	Anhydrite	2320	2335	15	Gray lime
1600	1630	30	Red sand	2335	2350	15	Gray lime & brown sand
				2350	2414	64	Gray lime
				2414	2420	6	Brown lime
				2420	2426	6	Gray lime & sand
				2426	2431	5	Brown lime & sand
				2431	2435	4	Brown lime
				2435	2450	15	Gray lime
				2450	2456	6	Brown lime
				2456	2460	4	Gray lime
				2460	2468	8	Brown & white lime
				2468	2473	5	White lime
				2473	TD		

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS REQUIRED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator S. A. Lenning

Address 1102 Hermosa, Artesia, N. M.

Name _____

Position or Title Agent

E. R. Holmes 6-14-56
 (Date)