


Ents 11/11

FORM 2810

N.

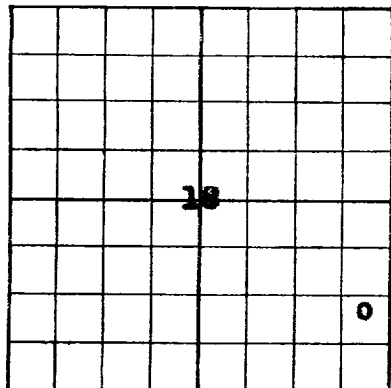

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO STATE LAND OFFICE
SANTA FE, NEW MEXICO

DEPARTMENT OF THE STATE GEOLOGIST
NEW MEXICO SCHOOL OF MINES
SOCORRO, NEW MEXICO

WELL RECORD

APR 16 1926

Mail to State Geologist, Socorro, New Mexico, not more than 30 days
after completion of well. Indicate questionable data by fol-
lowing it with (?). Submit in duplicate.

Company **A. Danciger** Address **1208 City Natl Bank Bldg.,
Wichita Falls, Texas.**
Send correspondence to **A. Danciger** Address **"**
RAGSDALE Well No. **1** in **SE SE** of Sec. **18**, T. **18 S**,
R. **28 E**, N. M. P. M., **Artesia** Oil Field, **Eddy** County.
If State land the oil and gas lease is No. **647** Assignment No. _____
If patented land the owner is _____ Address _____
The lessee is **A. Danciger** Address _____
If not state or patented land, give status _____
Drilling commenced **July 23** 19 **25** Drilling was completed **Sept 22** 19 **25**
Name of drilling contractor **W.A. Seidler** Address **Artesia, N.M.**
Elevation above sea level at top of casing _____ feet.
The information given is to be kept confidential until **further notice** 19 _____

OIL SANDS OR ZONES

No. 1, from **2091** to **2098** No. 4, from _____ to _____
No. 2, from **2150** to **2158** No. 5, from _____ to _____
No. 3, from **2200** to **2205** No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from **160** to **182** No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10"	45#		Natl	193'		In well			
8"	32#		"	503		"			
6 5/8"	20#		"	1986		Oil string			

MUDDING AND CEMENTING RECORD

SIZE	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
		None			

PLUGS AND ADAPTERS

Head Plug—Material **None** Length _____ Depth Set _____
Adapter—Material _____ Size _____

SHOOTING RECORD

SIZE	SHELL USED	EXPLOSIVE USED	QUANTITY	DATE	DEPTH SHOT	DEPTH CLEANED OUT
	Shot 150 Cts	Sept.	23, 1925.			

TOOLS USED **Cable Tools**

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **Oct. 1**, 19 **25**
The production for the first 24 hours was **50** barrels of fluid of which **100** % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, °Be. _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYES

_____, Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the
well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **5th**
day of **April**, 19 **26**.
E. E. Farnham
My commission expires **May 31, 1927**
Name **J. E. Vaeth**
Position **Office Manager**
Representing **A. Danciger.**
COMPANY OR OPERATOR.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	7	Soil, Lime, gyp	2091 to 2098 Oil sand
7	160	Sandy shale	2098 2101 White lime, hard
160	182	Quick sand, 5 bailers water	2101 2112 Gray sand
182	197	Lime, white - set 193' 10" casing.	2112 2123 Lime
197	230	Gypsum	2123 2134 White lime
230	250	Gyp lime	2134 2150 Lime
250	262	Conglomerate	2150 2158 Oil & gas sand
262	377	Red mud	2158 2196 Lime
377	392	Sandy shale	2196 2198 Brown lime
392	395	Lime, white 396' 8 1/2" Cas.	2198 2200 Sand
395	455	Gypsum	2200 2205 Sand oil
455	470	Red mud	2205 2212 Pink lime
470	500	Gypsum	2212 2240 Wk Pink Lime
500	510	Lime, gyp	2240 2242 White lime sand
510	530	Gyp	2242 2245 Lime
530	533	Red Mud	
533	574	Lime, gyp	
574	605	Gyp, light	
605	645	Red mud	
645	695	Gypsum, pink	
695	710	Red rock	
710	714	Lime shells	
714	720	Red rock	
720	725	Lime shells	
725	785	Red rock	
785	805	Lime, gray	
805	815	Gyp	
815	832	Lime, gray	
832	840	Gyp	
840	855	Gyp, lime	
855	860	Gyp	
860	865	Gyp	
865	880	Lime, light	
880	885	Red mud	
885	925	Lime	
925	960	Gyp	
960	972	Red rock	
972	988	Gyp	
988	990	Lime-show oil	
990	991	Lime	
991	1030	Gypsum	
1030	1110	Lime	
1110	1115	Red rock	
1115	1190	Lime	
1190	1200	Gyp, pink	
1200	1210	Lime	
1210	1235	Gyp	
1235	1250	Red rock	
1250	1265	Lime	
1265	1285	Pink gyp	
1285	1315	Lime	
1315	1500	Gyp	
1500	1541	Red sand	
1541	1565	Hard lime	
1565	1570	Gyp	
1570	1685	Lime	
1685	1705	Sandy lime	
1705	1710	Lime	
1710	1730	Sandy lime, red	
1730	1760	Sandy lime, gray	
1760	1820	Sandy lime	
1820	1825	Lime, hard	
1825	1835	Lime, pink	
1835	1855	Lime, gray	
1855	1885	Sandy lime	
1885	19 50	Lime, gray	
1950	2060	White lime	1956' 6 5/8" casing
2060	2080	Lime	
2080	2091	White lime	