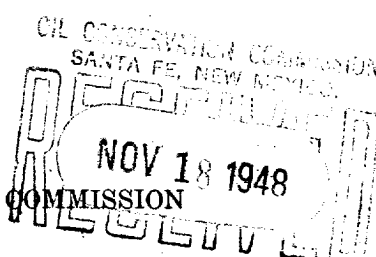
AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Robert E. McKee Box 246 Artesia, New Mexico
Company or Operator Address
State Well No. 8 in NESE of Sec. 19, T. 18S
Lease
R. 28E, N. M. P. M., Artesia Field, Eddy County.
Well is 1650 feet north of the North line and 1980 feet west of the East line of Section 19
If State land the oil and gas lease is No. B-11339 Assignment No.
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is Robert E. McKee Address Box 246, Artesia, N.M.
Drilling commenced April 15th, 1948 Drilling was completed June 13th, 1948
Name of drilling contractor T. H. Donnelly Address Artesia, New Mexico
Elevation above sea level at top of casing 3581 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 2050 to 2075 No. 4, from to
No. 2, from 2087 to 2097 No. 5, from to
No. 3, from 2120 to 2150 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 165 to 175 feet.
No. 2, from 325 to 345 feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8	24	10		455	Texas				Shut off water
7	20	10		1950	Texas				Protect pay

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/2	10	220				10 sacks of mud
9 3/4	8 5/8	450	30			
8 1/4	7	1950	253			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5 1/4	yes	Liquid Nitro Glys.	290 qts.	June 5,	2005 feet	2150 feet

Results of shooting or chemical treatment 45 barrels per day before shooting, 120 barrels per day after shooting.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing June 10th, 1948
The production of the first 24 hours was 100 barrels of fluid of which 95% was oil; 0% emulsion; 5% water; and 0% sediment. Gravity, Be. 37°
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Jack Melton Driller J. B. Best Driller
G. H. Harris Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 16

day of November, 1948

Theda Smith
Notary Public

My Commission expires March 7, 1950

Artesia, New Mexico, November 16th, 1948

Name J. R. Lund

Position Authorized Agent

Representing Robert E. McKee
Company or Operator

Address Box 246, Artesia, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
- 0 -	575	575	Red Beds and caliche
575	1210	635	Red Beds, sand and anhydrite
1210	1430	220	Sand
1430	1765	335	Sand and anhydrite
1765	2150	385	Line and sandy line.
			Top of formations
			Artesia Red Sand 1430 feet
			Top of Line 1765 feet
			Top of pay 2005 feet