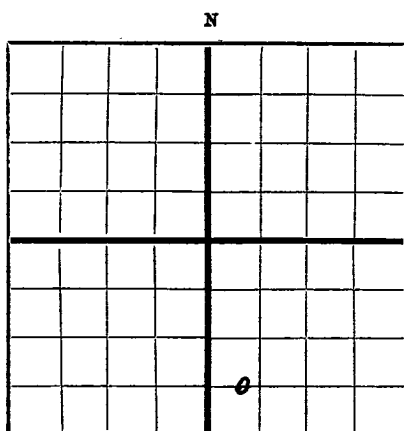


RECEIVED
JUN 15 1949

FORM C-105

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico
Oil Cons. Comm.
Artesia Office

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Robert E. McKee Box 246, Artesia, New Mexico
State Company or Operator Well No. 13 in SW/4 SE/4 of Sec. 19, T. 18 S.
Lease 28 E. Artesia Field, Eddy County.
N. M. P. M. North South
Well is 660 feet south of the North line and 2310 feet west of the East line of Section Line 28
If State land the oil and gas lease is No. B-11339 Assignment No.
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is Robert E. McKee Address Box 246, Artesia, N. M.
Drilling commenced May 1 19 49 Drilling was completed May 31 19 49
Name of drilling contractor S. P. Yates Address Artesia, New Mexico
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until June 15 19 49

OIL SANDS OR ZONES

No. 1, from 1990 to 1998 No. 4, from to
No. 2, from 2053 to 2060 No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 120 to 125 feet.
No. 2, from 175 to 180 feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8	29#	8v	J & L	500'	Reg. pattern				Water string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8-5/8	500'	50	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
8" hole	6"	Nitro-O.W.E.	295 qts.	5-26-49	1985 to 2065	2085

Results of shooting or chemical treatment 900 feet of oil in hole after 12 hour test

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from top feet to 2145 feet, and from feet to feet

PRODUCTION

Put to producing May 31 19 49
The production of the first 24 hours was 60 barrels of fluid of which 27 % was oil; 3 % emulsion; % water; and % sediment. Gravity, Be. 36.6
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

T. Bradshaw Driller
W. Trembley Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 10th

day of June 19 49

Jane R. Dielard
Notary Public

My Commission expires January 13, 1951

Artesia, New Mexico June 10, 1949

Name J. R. Lund

Position Manager

Representing Robert E. McKee

Company or Operator

Address Box 246, Artesia, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	45	45	Caliche
45	115	65	Red Mud
115	200	85	Red Mud
200	250	50	Red Mud
250	320	70	Mud - Anhy.
320	395	75	Mud - Anhy.
395	425	30	Mud - Anhy.
425	475	50	Mud - Anhy.
475	500	25	Mud - Anhy.
500	507	7	Mud - Anhy.
507	545	38	Anhydrite
545	620	75	Anhydrite
620	675	55	Anhydrite - Lime shell
675	745	70	Anhydrite
745	820	75	Anhydrite
820	880	60	Anhydrite
880	935	55	Anhydrite
935	990	55	Anhydrite
990	1045	55	Anhydrite
1045	1100	55	Anhydrite
1100	1155	55	Anhydrite
1155	1200	45	Anhydrite
1200	1255	55	Anhydrite
1255	1300	45	Anhydrite
1300	1360	60	Anhydrite
1360	1425	65	Anhydrite
1425	1485	60	Anhydrite and Red Sand
1485	1545	60	Anhydrite
1545	1595	50	Anhydrite
1595	1645	50	Anhydrite
1645	1685	40	Anhydrite
1685	1690	5	Sand
1690	1705	15	Anhydrite
1705	1741	36	Sand
1741	1757	16	Anhydrite
1757	1765	8	Anhydrite & Lime
1765	1805	40	Lime & Anhydrite
1805	1825	20	Gray Lime
1825	1845	20	Lime
1845	1875	30	Lime
1875	1905	30	Lime
1905	1920	15	Lime
1920	1950	30	Lime
1950	1975	25	Lime
1975	1992	17	Lime
1992	1998	6	Sand Section
1998	2000	2	Lime
2000	2025	25	Sandy Lime
2025	2030	5	Sand Section - hard
2030	2050	20	Lime
2050	2075	25	Lime
2075	2100	25	Lime
2100	2125	25	Lime
2125	2145	20	Lime