


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

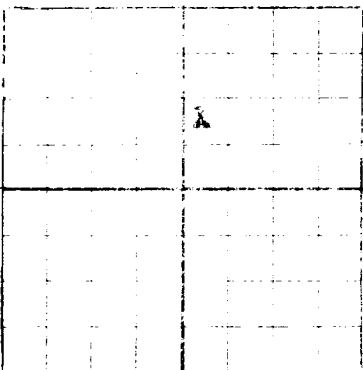

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Flynn, Welch & Yates Artesia, New Mexico
County or Operator Address
State 647 Well No. 21 in 4 of Sec. 27, T. 18
R. 28 N. M. P. M. Artesia Field, ddy County.
Well is 1650 feet south of the North line and 2310 feet west of the East line of Section 27
If State land the oil and gas lease is No. 647 Assignment No. _____
If patented land the owner is _____ Address _____
If Government land the permittee is _____ Address _____
The Lessee is _____ Address _____
Drilling commenced May 14, 1947 19 ____ Drilling was completed August 25 19 47
Name of drilling contractor Self Address Artesia, New Mexico
Elevation above sea level at top of casing _____ feet.
The information given is to be kept confidential until _____ 19 ____

OIL SANDS OR ZONES

No. 1, from 2320 to 2374 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet. _____
No. 2, from _____ to _____ feet. _____
No. 3, from _____ to _____ feet. _____
No. 4, from _____ to _____ feet. _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<u>10</u>				<u>305</u>					<u>Water</u>
<u>7</u>				<u>2234</u>					<u>Water</u>

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>10"</u>	<u>10"</u>	<u>305</u>	<u>50</u>	<u>Haliburton</u>		
	<u>7"</u>	<u>2234</u>	<u>50</u>	<u>Haliburton</u>		

PLUGS AND ADAPTERS

Heaving plug - Material _____ Length _____ Depth Set _____
Adapters - Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

Production Natural 18 bbls - 24 Hrs.Production After Treatment - 100 bbls - 24 Hrs.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from 0 feet to 2374 feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing August 25 19 47
The production of the first 24 hours was 100 barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

L. P. Davis Driller Paris Davis Driller
Nell Johnson Driller J. G. Crow Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 25thday of August 19 47Nola Ballard

Notary Public

My Commission expires 6-5-51Artesia, New Mex. 8-25-47Name Shelley DavisPosition AgentRepresenting Flynn, Welch & YatesAddress Artesia, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
210	210		lyl
210	220	10	red sand
220	230	10	aby
230	240	10	aby
240	250	10	red sand
250	260	10	aby
260	270	10	water sand
270	280	10	aby
280	290	10	red sand
290	300	10	aby
300	310	10	aby
310	320	10	aby
320	330	10	aby
330	340	10	aby
340	350	10	aby
350	360	10	aby
360	370	10	aby
370	380	10	aby
380	390	10	aby
390	400	10	aby
400	410	10	aby
410	420	10	aby
420	430	10	aby
430	440	10	aby
440	450	10	aby
450	460	10	aby
460	470	10	aby
470	480	10	aby
480	490	10	aby
490	500	10	aby
500	510	10	aby
510	520	10	aby
520	530	10	aby
530	540	10	aby
540	550	10	aby
550	560	10	aby
560	570	10	aby
570	580	10	aby
580	590	10	aby
590	600	10	aby
600	610	10	aby
610	620	10	aby
620	630	10	aby
630	640	10	aby
640	650	10	aby
650	660	10	aby
660	670	10	aby
670	680	10	aby
680	690	10	aby
690	700	10	aby
700	710	10	aby
710	720	10	aby
720	730	10	aby
730	740	10	aby
740	750	10	aby
750	760	10	aby
760	770	10	aby
770	780	10	aby
780	790	10	aby
790	800	10	aby
800	810	10	aby
810	820	10	aby
820	830	10	aby
830	840	10	aby
840	850	10	aby
850	860	10	aby
860	870	10	aby
870	880	10	aby
880	890	10	aby
890	900	10	aby
900	910	10	aby
910	920	10	aby
920	930	10	aby
930	940	10	aby
940	950	10	aby
950	960	10	aby
960	970	10	aby
970	980	10	aby
980	990	10	aby
990	1000	10	aby