


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

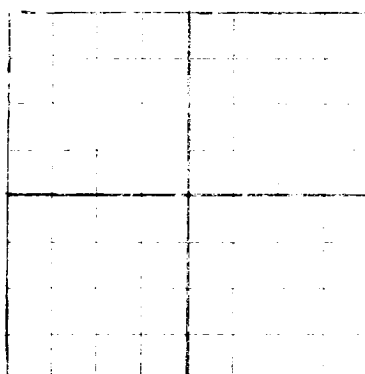

WELL RECORD

Deepening Project-Drilled well from 2505' to 3034'

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Resler Oil Co. Artesia, N.M.
 Shannon State Well No. 1 in SE-SE of Sec. 27 T. 18
 R. 28 N. M. P. M. Artesia Field, Eddy County.
 Well is 5030 feet south of the North line and 250 feet west of the East line of Sec. 27
 If State land the oil and gas lease is No. 047 Assignment No.
 If patented land the owner is Address
 If Government land the permittee is Address
 The Lessee is Martin Yates, Jr. Address Artesia, N.M.
 Drilling commenced Nov. 22 1947 Drilling was completed Jan. 9 1948
 Name of drilling contractor S. P. Yates Address Artesia, N.M.
 Elevation above sea level at top of casing 3572 feet.
 The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
 No. 2, from to No. 5, from to
 No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 2995 to 3034 feet. 5 barrels in 8 hours.
 No. 2, from to feet.
 No. 3, from to feet.
 No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7	20			2523					
This pipe was pulled when plugging well.									

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
 Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment None

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
 Cable tools were used from 2505 feet to 3034 feet, and from feet to feet

PRODUCTION

Put to producing 19
 The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
 If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
 Rock pressure, lbs. per sq. in.

EMPLOYEES

Frank Sloan Driller Driller
 E. Conner Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 2nd

day of March 1948

Notary Public
 My Commission expires January 26, 1949

My Commission expires

Artesia, N. M. March 2, 1948

Name Vilas P. Shuman

Position Secretary Operating Committee

Representing Malco-Resler-Yates

Address Carper Bldg. Artesia, New Mex.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
2505	2585		Red sandy dolomite
2585	2710		White dolomite
2710	2735		Tax dolomite
2735	2765		Tax sandy dolomite
2765	2800		Tax dolomite
2800	2900		White dolomite
2900	2934		Buff dolomite