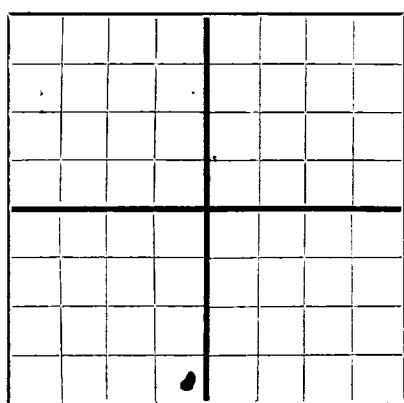


APR 19 1948

N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSIONS OFFICE
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

The Eastland Oil Co

Box 1306, Monahans, Texas.

Twin Lakes

Company or Operator

Well No.

9

in

SW 1/4

of Sec.

28

T

18

28

Lease

Artesia

Eddy

R. N. M. P. M.

Field,

County.

Well is

330

feet south of the North line and

2240

feet west of the East line of

Sec. 28

If State land the oil and gas lease is No.

647

Assignment No.

231

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced

Jan. 4th

19 48

Drilling was completed

March 26th

19 48

Name of drilling contractor

R. A. Thomas

Address

Monahans, Texas

Elevation above sea level at top of casing

3557

feet.

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from

2621

to

2632

No. 4, from

to

No. 2, from

2731

to

2740

No. 5, from

to

No. 3, from

2809

to

2819

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

175

to

180

feet.

10 bbls

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10 3/4	40	8 V thd		372	Tox. Pat. Reg				Surf. Csg
8 5/8	32	10 V		800	" "	"			Shut off cvgs
7"	20	10 V		2582					Oil string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
12"	10 3/4	372		Mud		15 aks
	8 5/8	800		Pulled out		
	7"	2582	25			

PLUGS AND ADAPTERS

Heaving plug—Material..... Length..... Depth Set.....

Adapters — Material..... Size.....

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5"		Nitro	60 qts	3/21	2620-2635	
5"		"	60 "	3/21	2724-2744	
		Acid	1000 gal	3/9	2580-2645	
		"	2000 "	3/11	2580-2645	
		"	1000 "	3/13	2695-2745	

Results of shooting or chemical treatment.....

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from.....feet to.....feet, and from.....feet to.....feet

Cable tools were used from.....feet to.....feet, and from.....feet to.....feet

PRODUCTION

Put to producing April 2nd, 19 48.

The production of the first 24 hours was.....52.....barrels of fluid of which.....92.....% was oil;.....% emulsion;.....8.....% water; and.....% sediment. Gravity, Be.....35

If gas well, cu. ft. per 24 hours.....Gallons gasoline per 1,000 cu. ft. of gas.....

Rock pressure, lbs. per sq. in.....

EMPLOYEES

R. A. Thomas....., Driller....., Driller

....., Driller....., Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this.....20th.....

day of.....April.....19 48

W. R. Andrews Notary Public

Ward County, Texas

My Commission expires.....June 1st 1949

Monahans, Texas April 20-48

Name.....

Position.....Sup't

Representing.....The Eastland Oil Co

Company or Operator

Address.....Box 1306, Monahans, Texas.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	15	15	Lime & Caliche
15	190	175	Sand & water 175 to 190 bbls per hr.
190	395	205	Red rock & shells; 10 3/4" set at 372'
395	520	125	Red shale & Anhy. Top of Anhy. 520'
520	800	280	Anhydrite; Ran 800' 8 5/8" casing
800	1050	250	" & shale
1050	1400	350	"
1400	1700	300	" & shale breaks
1700	1778	78	Red sand
1778	1920	142	Anhydrite & shale
1920	1976	56	Lime, gray, top of Artesia lime
1976	1980	4	Sandy lime, show of gas H2SO4
1980	2037	57	Sand lime, rainbow show of oil
2037	2165	128	Gray lime
2165	2200	35	Brown "
2200	2225	25	White "
2225	2310	85	Gray "
2310	2507	197	Brown "
2507	2580	73	Gray " 7" casing set at 2580'
2580	2621	41	Dark "
2621	2628	7	Lime show of oil & gas
2628	2632	4	" free oil in gray lime
2632	2695	63	" gray
2695	2731	36	2 Brown
2731	2740	9	" show of oil & gas
2740	2809	69	" gray
2809	2819	10	" Brown
2819	2850	31	" Dark