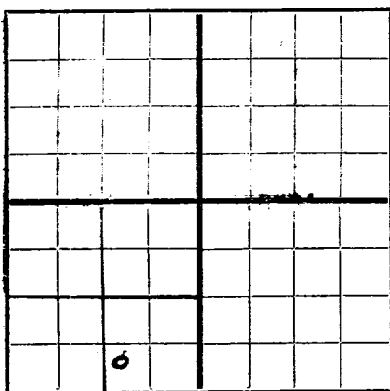


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Flynn, Welch & Yates Artesia, New Mexico
Company or Operator Address
State 2 Well No. 2 in SW/4 of Sec. 1 T. 18
Lease
R. 28, N. M. P. M. Loco Hills Field, Eddy County.
Well is 1950 feet south of the North line and 3630 feet west of the East line of 1-18-28
If State land the oil and gas lease is No. B-5084 Assignment No. _____
If patented land the owner is _____ Address _____
If Government land the permittee is _____ Address _____
The Lessee is _____ Address _____
Drilling commenced May 8 1950 Drilling was completed June 23 1950
Name of drilling contractor _____ Address _____
Elevation above sea level at top of casing _____ feet.
The information given is to be kept confidential until _____ 19____.

OIL SANDS OR ZONES

No. 1, from 2665 to 2691 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<u>8"</u>				<u>460'</u>					
<u>7"</u>				<u>2543'</u>					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
<u>5"</u>			<u>100 qts</u>	<u>6-22-50</u>		

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing July 5 1950
The production of the first 24 hours was 15 barrels of fluid of which 100 % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

J. M. Welch _____, Driller _____, Driller
P. V. Morris _____, Driller _____, Driller


FORMATION RECORD ON OTHER SIDE


I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 7th Artesia, New Mexico July 7, 1950
day of July, 19 50 Name Glenn A. [Signature]
Notary Public Position Agent
Representing Flynn, Welch & Yates
Company or Operator Address Artesia, New Mexico
My Commission expires May 31, 1953

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	40'		Sand & gyp
40'	100'		Sand
100'	340'		Gyp
340'	400'		Red clay
400'	460'		Red clay and salt
460'	1015'		Salt
1015'	1050'		Blue shale and anhydrite
1050'	1150'		Anhydrite
1150'	1163'		Brown lime
1163'	2170'		Anhydrite
2170'	2195'		Red sand
2195'	2270'		Anhydrite
2270'	2305'		Anhydrite and broken lime
2305'	2345'		Anhydrite and lime
2345'	2363'		Gray lime
2363'	2395'		Anhydrite and lime
2395'	2490'		Anhydrite
2490'	2500'		Lime
2500'	2508'		Shale
2508'	2516'		Gray lime
2516'	2530'		Shale and anhydrite
2530'	2664'		Lime
2664'	2670'		Sand
2670'	2690'		Oil sand
2690'	2725'		Lime



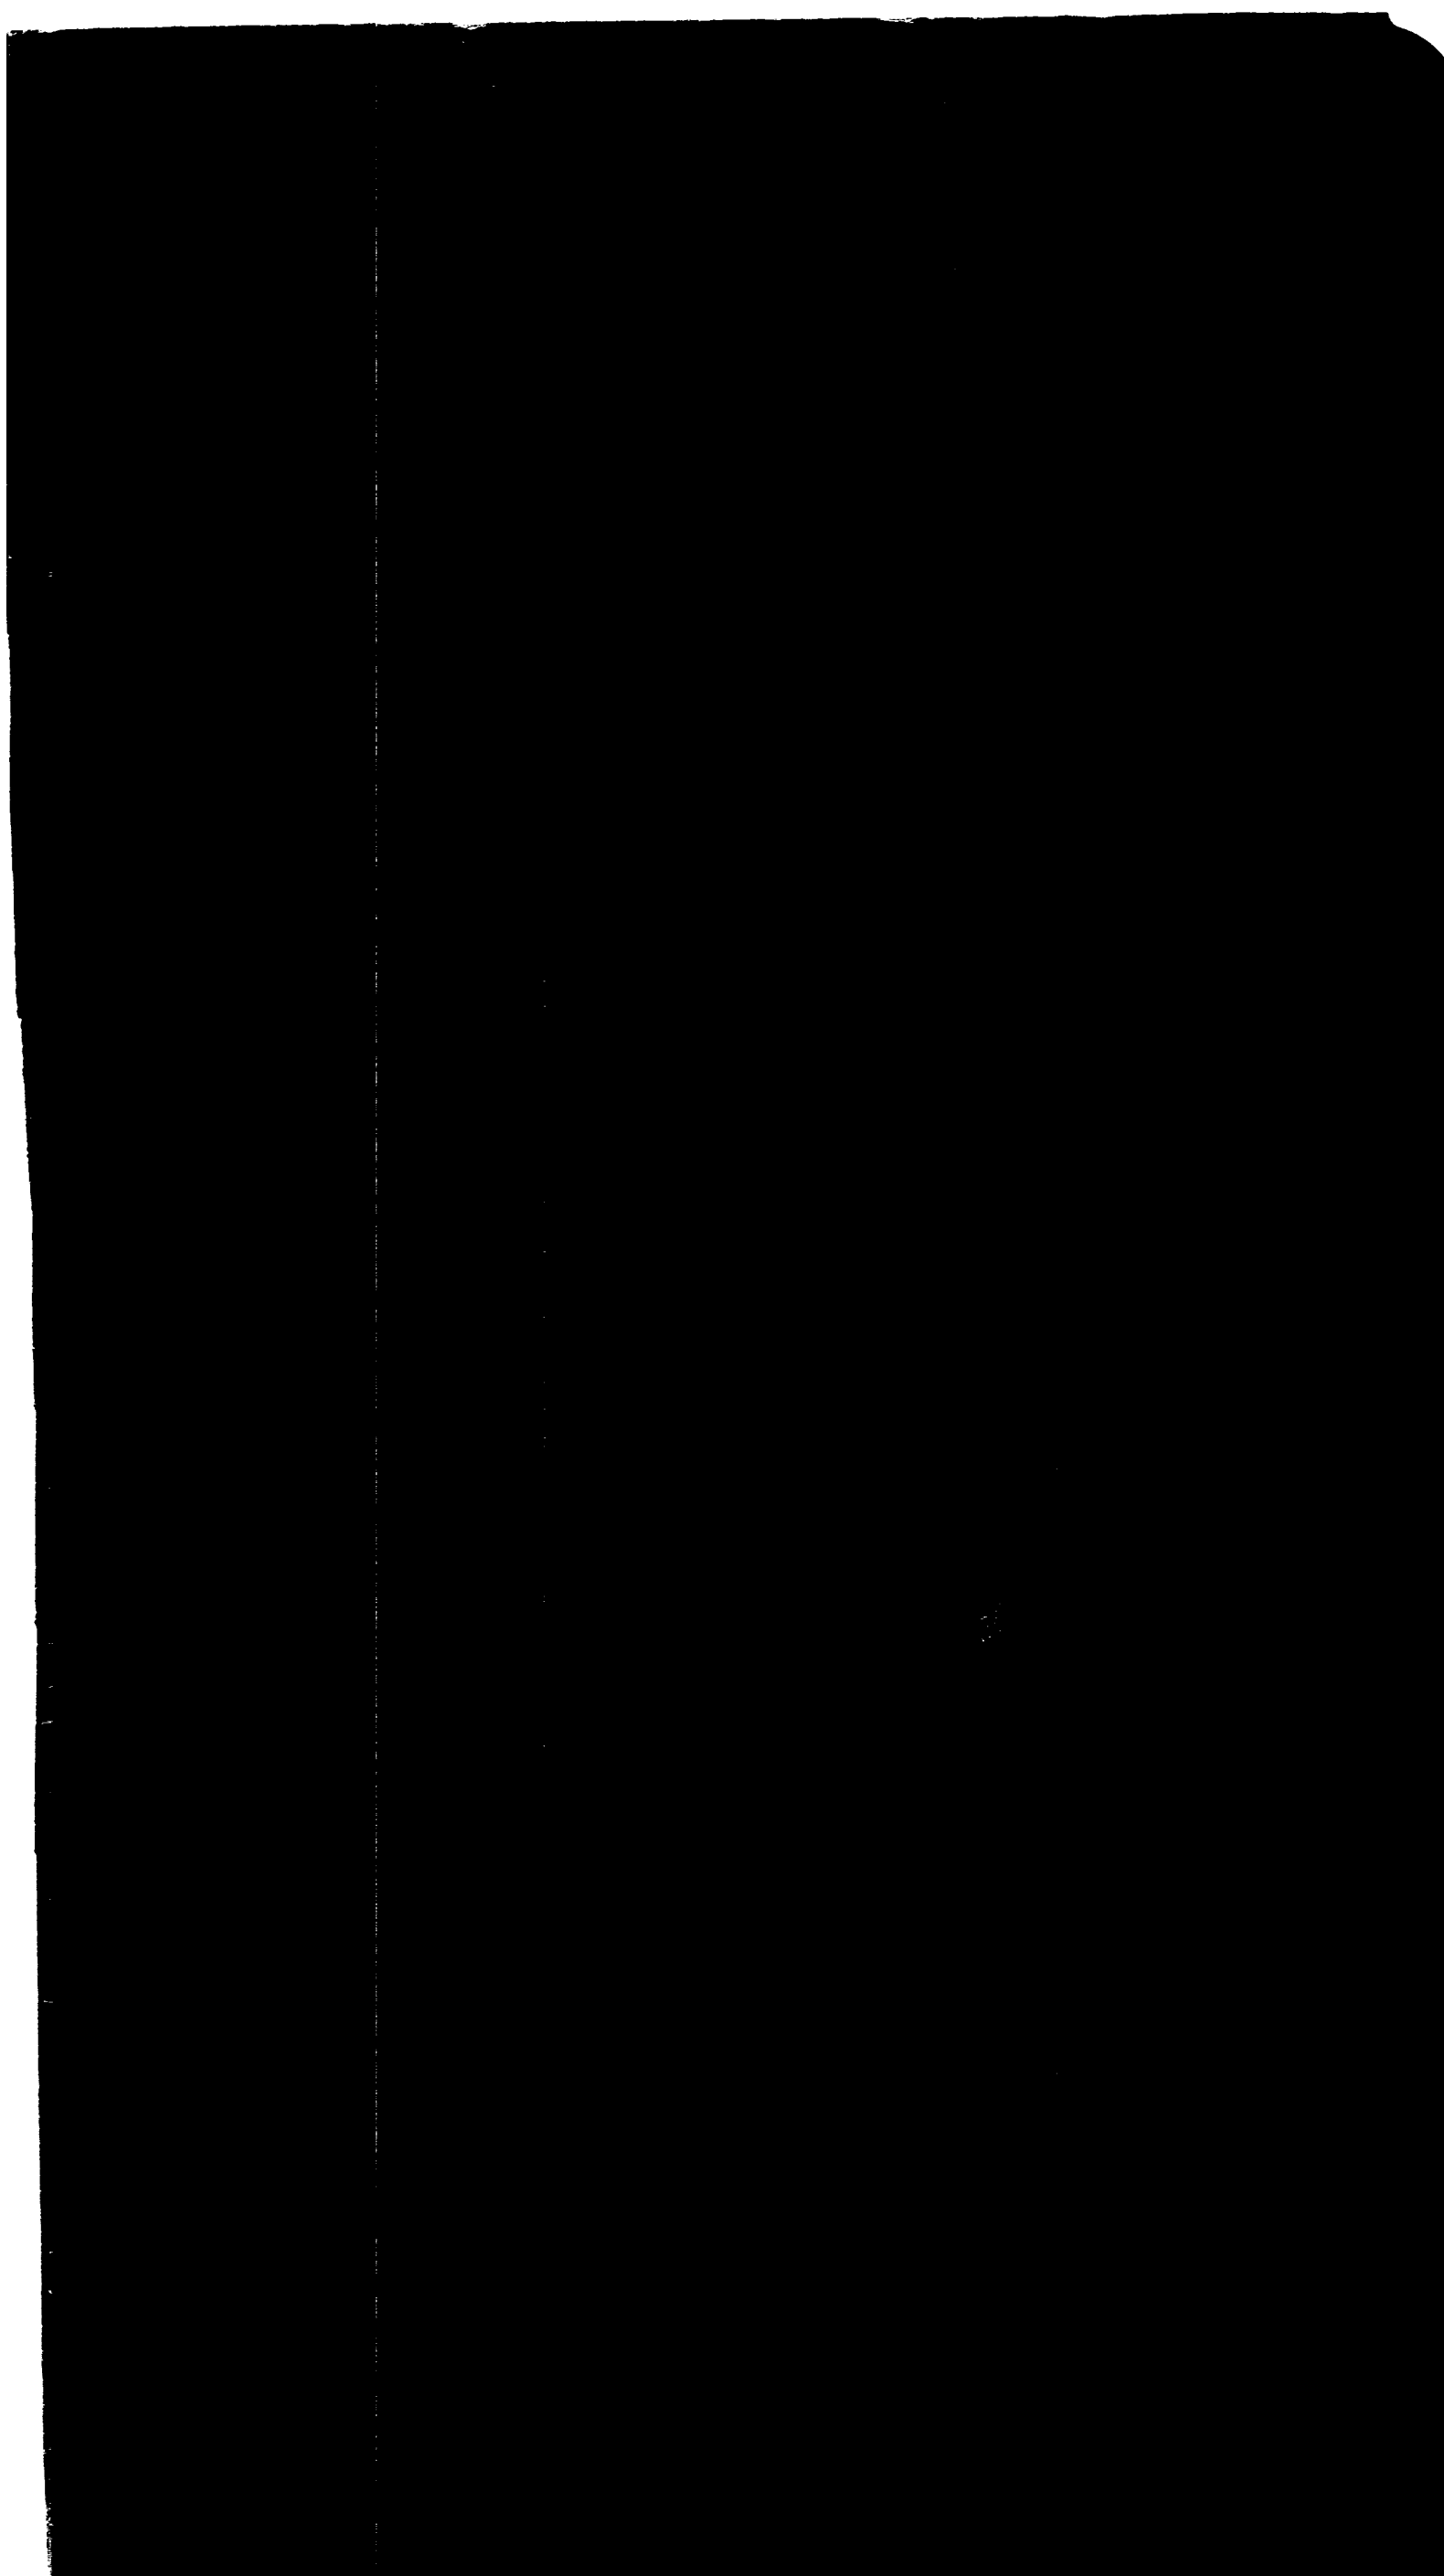

Shannon Wellbore Operator 1-18-29
(OPERATOR) (STR)
State #1 21
(LEASE) (WELL NO.)

FORM

DATE APPROVED

C-101. . . .Depth 2750 April 18, 1950

C-102. . . .Test casing. _____

C-102. . . .Repair well _____

C-102. . . .Deepen well _____

C-102. . . .Shoot _____

C-102. . . .Treat _____

C-103. . . .Begin Drilling _____

C-103. . . .Shoot _____

