


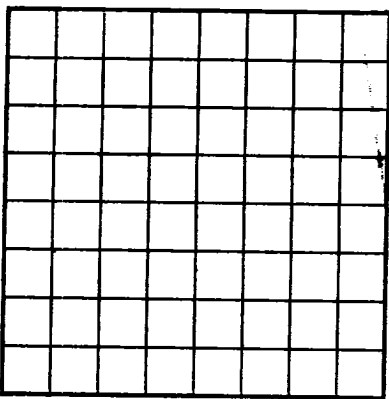

RECEIVED
1939-6-1939
Oilwell, New Mexico
RECEIVED
MAR 10 1977
G.O.G. LOG OF OIL OR GAS WELL

Las Cruces
U. S. LAND OFFICE 51102
SERIAL NUMBER
LEASE OR PERMIT TO PROSPECT

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOCATE WELL CORRECTLY

Company Franklin Petroleum Corporation Address Box #218, Smith, New Mexico
Lessor or Tract Franklin Petroleum Corporation Field Loco Hills State New Mexico
Well No. 5-A Sec. 1 T. 18S R. 29E Meridian NMPM County Eddy
Location 1650 ft. {N} of North Line and 990 ft. {E} of East Line of Sec. 1-18S-29E Elevation 3537 ft.
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed O. C. Rogers
Date November 3, 1939 Title Supt.

The summary on this page is for the condition of the well at above date.

Commenced drilling September 9, 1939 Finished drilling October 31, 1939

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from (G) 2765 to 2789 No. 4, from _____ to _____
No. 2, from 2769 to 2791 No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>2 1/2"</u>	<u>28.4</u>	<u>10</u>	<u>Lapweld</u>	<u>450'</u>					
HISTORY OF OIL OR GAS WELL									

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>2 1/2"</u>	<u>450'</u>	<u>50</u>	<u>Gibson</u>		
<u>7" OD</u>	<u>2665'</u>	<u>100</u>	<u>"</u>		<u>5 tons</u>

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
<u>4" Type F Duplex Zero hour</u>	<u>Nitroglycerin</u>	<u>80 lbs.</u>	<u>10/31</u>	<u>2765'-31'</u>	<u>2791'</u>	
<u>Electric Bomb</u>			<u>30</u>			
<u>1-zero hour umbrella Bridge</u>						

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

_____, 19____ Put to producing October 31, 1939

The production for the first 24 hours was 500 barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

C. M. Steepleton, Driller E. E. Sims, Driller
P. Davis, Driller E. J. Cluney, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	60	60	Sand
60	165	105	Sandy shale
165	230	65	" "
230	310	155	Anhydrite
310	330	20	Sandy shale
330	345	25	oil rock
345	416	71	" "
416	575	159	Salt
575	765	190	" "
765	830	145	" "
830	1080	170	" "
1080	1105	25	Anhydrite
1105	1170	65	" & red beds
1170	1290	120	shale
1290	1380	90	shale
1380	1430	50	shale
1430	1480	50	shale
1480	1490	10	Light shale
1490	1540	50	" "
1540	1575	35	shale
1575	1680	105	Shale (oil)
1680	1735	55	Anhydrite
1735	1825	90	" "
1825	1920	95	" "
1920	2010	90	" "

3537
1089
1286

3537
1089
1286

30-015-03239

Ogriid - 25575

Prop - 12017

Pool - 39520