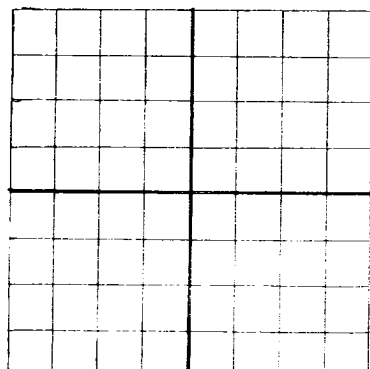


N


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

DUPLICATE

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Allen, Fair & Pope

Box 516, Artesia, N. Mex.

Company or Operator

State

Well No.

1-C

in NE 1/4 NW 1/4

of Sec.

2

T. 18S

Lease

R. 29E

N. M. P. M.

Leco Hills

Field,

Eddy

County.

Well is 990 feet south of the North line and 1650 feet west of the East line of Sec. 2-18S-29E.

If State land the oil and gas lease is No. B-6058 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced 11/18/40 19 Drilling was completed 1/3/41 19

Name of drilling contractor C. C. Dodson Address Artesia, N. M.

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 2594 to 2600 No. 4, from to

No. 2, from 2645 to 2730 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 310 to 320 feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 1/2"	28#	10		440'	Plain				
7" OD	20#	8	Y-town	2517'	"				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8 1/2"	440'	50	Halliburton		
8"	7" OD	2517'	100	"	Heavy	3 tons

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	Tin	Nitre	225 qts.	1/6/41	2645-2730	2730

Results of shooting or chemical treatment After shot, cleaned out to bottom and run 2670'
2" upset tubing. Flowed 60 bbls. in 3 hours.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 2738 feet, and from feet to feet

PRODUCTION

Put to producing 1/16/41 19

The production of the first 24 hours was 60 barrels of fluid of which 100% was oil;

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Ray Hill Driller Glenn Hill Driller

O. E. Wood Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 20th

day of Jan. 19 41

Notary Public

My Commission expires 2/28/44

Box 516, Artesia, N. M. 1/20/41

Name Frank P. Collins

Position Book-keeper

Representing Allen, Fair & Pope

Address Box 516, Artesia, N. M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	230	230	Sand & Clay
230	285	55	Anhydrite
285	310	25	Anhydrite & Clay
310	320	10	Gravel & water
320	335	15	Red Clay
335	430	95	Gumbo & anhydrite
430	445	15	Anhydrite
445	575	130	Salt
575	645	70	Salt & anhydrite
645	715	70	Salt & potash
715	775	60	Salt & anhydrite
775	910	135	Salt
910	945	35	Anhydrite
945	1310	365	Anhydrite & red shale
1310	1340	30	Anhydrite & lime
1340	1700	360	Anhydrite
1700	1710	10	Brown lime
1710	1720	10	Anhydrite
1720	1740	20	Brown lime
1740	1815	75	Lime & anhydrite
1815	1900	85	Anhydrite
1900	1925	25	Anhydrite & shale
1925	2010	85	Anhydrite
2010	2040	30	Anhydrite & Shale
2040	2070	30	Anhydrite
2070	2090	20	Lime & Anhydrite
2090	2115	25	Anhydrite
2115	2145	30	Red Sand
2145	2155	10	Anhydrite
2155	2165	10	Brown lime
2165	2175	10	Lime
2175	2180	5	Anhydrite
2180	2210	30	Anhydrite & lime
2210	2245	35	Lime
2245	2290	45	Lime & anhydrite
2290	2300	10	Red sand
2300	2335	35	Anhydrite
2335	2355	20	Lime & anhydrite
2355	2375	20	Lime & sand
2375	2400	25	Anhydrite
2400	2450	50	Red sand & anhydrite
2450	2470	20	Anhydrite
2470	2485	15	Lime
2485	2495	10	Sand
2495	2594	99	Lime
2594	2610	16	Sandy Lime
2610	2620	10	Sandy Lime (oil show)
2620	2630	10	Oil Sand
2630	2655	8	Lime
2610	2700	100	Lime
2710	2720	10	Sandy Lime (oil show)
2720	2730	10	Oil Sand
2730	2738	8	Lime