

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

*Amended* NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Artesia, New Mexico

Place

August 6, 1939

Date

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico,

Gentlemen:

DUPLICATE

You are hereby notified that it is our intention to commence the drilling of a well to be known as

Martin Yates, III

Company or Operator

Well No. 1in SE 1/4

Lease

of Sec. 2, T. 18 S, R. 29 E, N. M. P. M., Loce Hills Field, Edgy County.The well is 230 feet (N.) (S.) of the Section line and 2360 feet(E.) (W.) of the Section line of Section 2

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

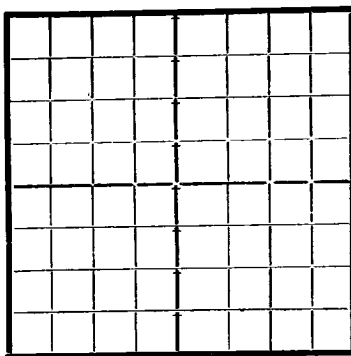
If state land the oil and gas lease is No. B-5524 Assignment No. 1

If patented land the owner is \_\_\_\_\_

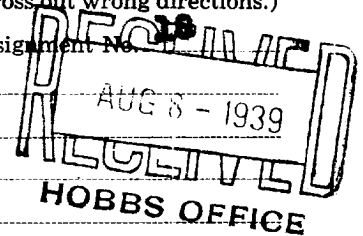
Address \_\_\_\_\_

If government land the permittee is \_\_\_\_\_

Address \_\_\_\_\_

The lessee is G.H. BassettAddress El Paso, Texas State National BankWe propose to drill well with drilling equipment as follows: New Wichita

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Spudding Machine

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: Bond made by Martin Yates, III and approved at Santa Fe, N.M.

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
10"	8"	28 lb.	Second Hand	400 ft.	Cemented with 50 sacks	50
8"	7" O.D. 20 lb. Seamless	20 lb.	new	2580	cemented	100 sacks 5 tons clay

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 2640 feet.

Additional information:

Expect to set 400 feet 8" 28 lb. second hand pipe twenty feet below top salt and cement with fifty sacks--expect to set 2580 feet of new 7" O.D. 20 lb. seamless pipe (production string) cemented with 5 tons clay and 100 sacks cement--expect to shoot well with 100 quarts nitro.

Except as follows:

AUG 8 - '39

Sincerely yours,

Martin Yates, III

Company or Operator

By Martin Yates III

Position \_\_\_\_\_

Send communications regarding well to

Name \_\_\_\_\_

Address \_\_\_\_\_

OIL CONSERVATION COMMISSION,

By Roy Farbraugh

Title \_\_\_\_\_

OIL &amp; GAS INSPECTOR