

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AMENDED *** NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico.
Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as

Martin Yates, III State Artistic, New Mexico Well No. 2 in HESN
Company or Operator, Lease
of Sec. 2, T. 18S., R. 29E., N. M. P.M., Loce Hills Field, Eddy County.
N.

The well is 2310 feet (N.) 441 of the South line and 2310 feet
(E.) 441 of the West line of Section 2

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. B-5524, Assignment No. _____

If patented land the owner is _____


Address _____

If government land the permittee is _____

Address _____

The lessee is _____

Address _____

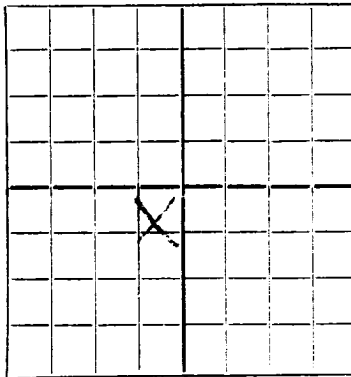

AREA 640 ACRES
LOCATE WELL CORRECTLY

We propose to drill well with drilling equipment as follows: Wichita 55

~~Special Spudder (own tools)~~

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: \$10,000.00 Blanket Bond filed with Commission at Santa Fe

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
10"	8 1/2"	28 lb.	Second hand	418 ft.	Cemented	50
8"	7" OD.	20 lb.	New	2525 ft.	Cemented	100 and 5 tons clay

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 2625 feet.

Additional information:

Plan to set 418 feet 8" 28 lb. casing 25 feet below top of salt and cement same with 50 sacks of cement--will let cement set 72 hours before drilling cement plug out--plan to set 2525 feet of 7" OD. new ~~without~~ casing and cement same with 100 sacks cement and 5 tons clay.
except as follows:

Martin Yates, III

Company or Operator

By Martin Yates III

Position _____

Send communication regarding well to

Name _____


Address _____

OIL CONSERVATION COMMISSION

By Roy Garbrough

Title OIL & GAS INSPECTOR

OCT 17 1939

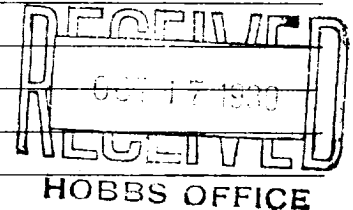

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF CHEMISTRY
RESEARCH REPORT NO. 1000