


FORMATION RECORD—Continued

FROM	TO	TOTAL FEET	FORMATION
0	32	32	Caliche
32	46	14	Sand
46	75	29	Red Rock
75	110	35	Lime
110	150	40	Gyp
150	195	45	Anhydrite
195	255	60	Red Rock
255	265	10	Gyp
265	345	80	Red Rock & Anhydrite
345	590	270	Salt
590	725	135	Anhydrite & Salt
725	760	35	Salt
760	775	15	Anhydrite & Salt
775	803	28	Lime
803	1065	262	Anhydrite
1065	1075	10	Red Rock
1075	1145	70	Anhydrite
1145	1265	120	Anhydrite & Red Shale
1265	1305	40	Anhydrite
1305	1335	30	Lime & Anhydrite
1335	1700	365	Anhydrite
1700	1735	35	Anhydrite & Red Shale
1735	1975	240	Anhydrite
1975	1998	23	Red Sand
1998	2115	117	Anhydrite
2115	2135	20	Lime & Anhydrite
2135	2165	30	Anhydrite & Shale
2165	2225	60	Anhydrite
2225	2255	30	Anhydrite & Shale
2255	2305	50	Anhydrite
2305	2478	173	Lime
2478	2485	7	Sandy Lime
2485	2555	70	Lime
Correction - Hole Log - Halliburton			
2555	2600	45	Sandy Lime (oil)
2600	2615	15	Lime

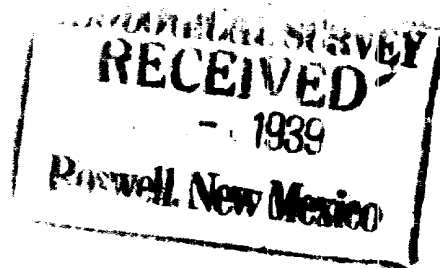

DELETED


LOGS RECD

SPILLING RECORD

WATER - 2100 LBS

WATER - 2100 LBS

WATER - 2100 LBS

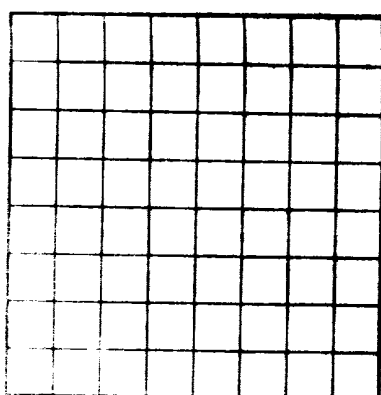

UNITED STATES **RE**
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company Mc-Tex-Stroup & Yates Address Artesia, New Mexico
 Section or Tract Miller Permit Field Loos Hills State New Mexico
 Well No. 1 Sec. 5 T. 18 R. 29 Meridian Range County Albany
 Location 1980t of N. Line and 1980t of E Line of Sac. 5-18-22 Elevation 3000

The information given herewith is a complete and correct record of the well and all work done thereon as can be determined from all available records.

Signed J. W. Marking
Title Production Bank

12/2/39

The summary on this page is for the condition of the well at above date

Commenced drilling 10/6/39 1939 Finished drilling 11/08/39

OIL OR GAS LANDS OR ZONES

(Don't pay for it)

No. 1, from	2555	to	2600	No. 4, from		to	
No. 2, from		to		No. 5, from		to	
No. 3, from		to		No. 6, from		to	

IMPORTANT WATER SANDS

165' in Anhydrite No. 3, from _____ to _____
225' to 230 No. 4, from _____ to _____

CASING RECORD

Size lasting	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
-6/0	32	8	SH	435'	Plain				
"	20	8	SS	2570	Hullings				

MUDDING AND CEMENTING RECORD

Where set	Number sacks of cement	Method used	Mud gravity	Amount of sand used
135	50	Halliburton		50 Sacks
2370	100	Halliburton		80 Sacks

PLUGS AND ADAPTERS

Sealing plug - Material _____ Length _____ Depth set _____
 Bolters - Material _____ Size _____

SHOOTING RECORD

Shot	Shot used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
7"	50 qt. Nitro-glycerin	300	11/1			2615

TOOLS USED

tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

tools were used from _____ 0 _____ feet to _____ 2415 feet, and from _____ feet to _____ feet.

DATES

19 Put to producing 10

Production for the first 24 hours was 300 barrels of fluid of which 200 % was oil; % water; and % sediment. Gravity 54

Well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Test pressure, lbs. per sq. in.

EMPLOYER

W. J. Watkins Driller
W. J. Coe Driller

FORMATION RECORD

[illegible]

(OVER)

RECEIVED
JAN 10 1960