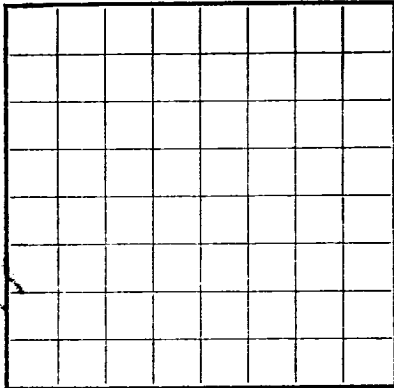


Las Cruces
U. S. LAND OFFICE
SERIAL NUMBER 062029
LEASE OR PERMIT TO PROSPECT

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

AUG 8 1956

NEW MEXICO

LOG OF OIL OR GAS WELL

Company McKee & Bassett Address P.O. Box 246, Artesia, New Mexico
Lessor or Tract 34 Field Turkey Track State New Mexico
Well No. 3 Sec. 34 T. 18-S R. 29-E Meridian N.M.P.M. County Eddy
Location 660/5 Line and 660/14 Line of 34 Elevation 3410
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed J. R. LindDate August 4, 1956Title Manager of Oil Production

The summary on this page is for the condition of the well at above date.

Commenced drilling June 15, 1956 Finished drilling July 27-abandoned, 1956

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 2070 to 2105 No. 4, from _____ to _____
No. 2, from 2205 to 2260 No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from 230 to 235 No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>8 5/8</u>	<u>24</u>	<u>8 rd</u>	<u>used</u>	<u>385</u>	<u>Reg.</u>	<u>270</u>			<u>well plugged</u>
HISTORY OF OIL OR GAS WELL									

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>8-5/8</u>	<u>385</u>	<u>25</u>	<u>Denton</u>		
<u>5 1/2</u>	<u>385</u>	<u>25</u>			
<u>5 1/2</u>	<u>385</u>	<u>25</u>			
<u>5 1/2</u>	<u>385</u>	<u>25</u>			

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
<u>3 1/2</u>	<u>308</u>	<u>NONE</u>			<u>100</u>	
<u>3 1/2</u>	<u>308</u>				<u>100</u>	
<u>3 1/2</u>	<u>308</u>				<u>100</u>	

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from Top feet to 2273 feet, and from _____ feet to _____ feet

DATES

Put to producing Abandoned July 27, 1956

The production for the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity °Bé.

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

H. S. Guinan, Driller C. V. Miller, Driller
_____, Driller _____, Driller

FORMATION RECORD

FROM	TO	TOTAL FEET	FORMATION
<u>0</u>	<u>10</u>	<u>10</u>	<u>Sand</u>
<u>4</u>	<u>20</u>	<u>16</u>	<u>Caliche</u>
<u>20</u>	<u>30</u>	<u>10</u>	<u>Sand</u>
<u>40</u>	<u>100</u>	<u>60</u>	<u>Red Beds</u>
<u>120</u>	<u>130</u>	<u>10</u>	<u>Red Beds</u>
<u>130</u>	<u>140</u>	<u>10</u>	<u>Gyp</u>
<u>140</u>	<u>165</u>	<u>25</u>	<u>Anhy. hard</u>
<u>165</u>	<u>185</u>	<u>20</u>	<u>Red Beds</u>
<u>185</u>	<u>210</u>	<u>25</u>	<u>Red Beds</u>
<u>210</u>	<u>215</u>	<u>5</u>	<u>Red Beds</u>
<u>215</u>	<u>230</u>	<u>15</u>	<u>Anhy.</u>
<u>230</u>	<u>245</u>	<u>15</u>	<u>Sand & Gravel</u>
<u>245</u>	<u>250</u>	<u>5</u>	<u>Sand & Gravel</u>
<u>250</u>	<u>307</u>	<u>57</u>	<u>Red Beds</u>
<u>307</u>	<u>315</u>	<u>8</u>	<u>Salt broken</u>
<u>315</u>	<u>325</u>	<u>10</u>	<u>Salt broken</u>
<u>325</u>	<u>330</u>	<u>5</u>	<u>Anhy.</u>
<u>330</u>	<u>350</u>	<u>20</u>	<u>Red Beds</u>
<u>350</u>	<u>355</u>	<u>5</u>	<u>Anhy. broken</u>
<u>355</u>	<u>378</u>	<u>23</u>	<u>Salt</u>
<u>378</u>	<u>385</u>	<u>7</u>	<u>Salt</u>
<u>385</u>	<u>455</u>	<u>70</u>	<u>Salt</u>
<u>455</u>	<u>560</u>	<u>105</u>	<u>Salt & Anhy.</u>
<u>560</u>	<u>650</u>	<u>90</u>	<u>Salt</u>
<u>650</u>	<u>733</u>	<u>83</u>	<u>Salt</u>
<u>733</u>	<u>745</u>	<u>12</u>	<u>Anhy.</u>

FORMATION RECORD—Continued

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

COULDFE WELL - CORRECTLY

1. The summary on this page is not the condition of the work at above date.

(b) Not a record

CONFIDENTIAL

U. S. GOVERNMENT PRINTING OFFICE 10-3004-2

JROCKET, BUTTERFIELD, NEW ORLEANS, LA.

FROM	TO	TOTAL FEET	FORMATION
745	835	90	Salt
835	910	75	Salt
910	935	25	Salt
935	960	25	Any.
960	1010	50	Any.
1010	1060	50	Any.
1060	1105	45	Any.
1105	1130	25	Any.
1130	1175	45	Any.
1175	1230	55	Any.
1230	1270	40	Any.
1270	1280	10	Any.
1280	1285	5	Brown Shale
1285	1360	75	Any.
1360	1380	20	Any.
1380	1390	10	Any.
1390	1415	25	Any.
1415	1425	10	Red sandy shale
1425	1460	35	Any.
1460	1465	5	Any.
1465	1495	30	Any.
1495	1505	10	Pink lime
1505	1510	5	Any. & sand
1510	1515	5	Any.
1515	1575	60	Lime
1575	1605	30	Lime
1605	1675	70	Lime
1675	1705	30	Lime
1705	1730	25	Lime
1730	1760	30	Lime
1760	1790	30	Lime
1790	1820	30	Lime
1820	1850	30	Lime
1850	1890	40	Lime
1890	1910	20	Lime
1910	1930	20	Broken lime
1930	1960	30	Sandy lime
1960	1990	30	Lime
1990	2025	35	Lime
2025	2060	35	Broken lime
2060	2066	6	Broken lime
2066	2076	10	Lime
2076	2085	9	Sandy lime
2085	2086	1	Gray xtn sand
2086	2091	5	Lime
2091	2102	11	Red xtn shale
2102	2135	33	Red sand
2135	2160	25	Lime
2160	2185	25	Lime
2185	2205	20	Lime
2205	2216	11	Lime
2216	2236	20	Lime
2236	2246	10	Sand & shale
2246	2273	27	Sand & lime
2273	2273	0	Lime