

N. M. O. C. C. COPY
UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TR. DATE*
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

LC 029395 (b)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Turner "B"

9. WELL NO.

24

10. FIELD AND POOL, OR WILDCAT

Fren Seven Rivers

11. SEC., T., E., M., OR BLK. AND SURVEY OR AREA

29-T17S-R31E

12. COUNTY OR PARISH

Eddy

13. STATE

N.M.

SUNDRY NOTICES AND REPORTS ON WELLS
(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL GAS WELL OTHER

2. NAME OF OPERATOR

Atlantic Richfield Company

3. ADDRESS OF OPERATOR

P. O. Box 1710, Hobbs, New Mexico 88240

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.)
At surface

660' FNL & 1979.4' FEL (Unit letter B)

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3696' DF

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

Plug & abandon

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

TD 2219'. Completed OH interval 2112-2219'.

8-5/8" OD 28 & 32# csg set @ 542.87' & cmtd w/50 sx.

7" OD 20# csg set @ 2112' & cmtd w/100 sx.

This well is depleted in the Fren Seven Rivers zone and is not needed in the future Fren Sand Waterflood. Propose to P&A in the following manner:

1. Rig up, install BOP.
2. Run 2-3/8" EUE tbg OE to 2012' & spot 30 sx Cl C cmt to cover bottom 100' of 7" OD csg.
3. Spot heavy gelled mud between all cmt plugs.
4. Run free point on 7" csg. Cut from free point @ approx 1400' & pull.
5. RIH w/2-3/8" tbg OE & spot 35 sx Cl C cmt (100' plug) across 7" csg stub.
6. Spot 35 sx Cl C cmt (100' plug) across 8-5/8" OD csg shoe & top of salt @ 543'.
7. Spot 10 sx Cl C cmt @ surface, install regulation dry hole marker, clean & level location

RECEIVED

NOV 25 1975

U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

La Roy Smith

TITLE

Dist. Drlg. Supv.

DATE

11/24/75

(This space for Federal or State office use)

TITLE


DATE

APPROVED

CONDITIONS OF APPROVAL, IF ANY:

MAR - 2 1976
L. L. BEEKMANN
ACTING DISTRICT ENGINEER

*See Instructions on Reverse Side

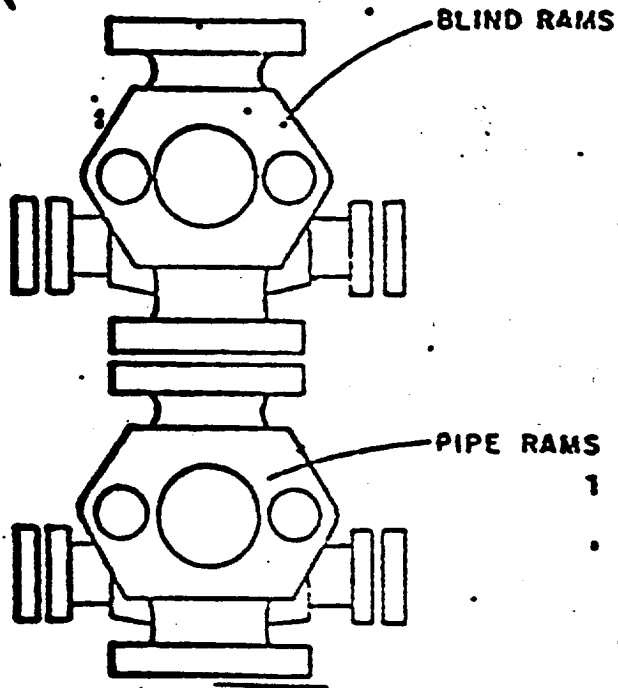

**ATLANTIC RICHFIELD COMPANY
Blow Out Preventer Program**

Lease Name Turner "B"

Well No. 24

Location 660' FNL & 1979.4' FEL
Sec 29-T17S-R31E, Eddy Co.

BOP to be tested before installed on well and will be maintained in good working condition during workover. All wellhead fittings to be of sufficient pressure to operate in a safe manner.