


DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

WELL NAME: TURNER "B" #64			FIELD: GRAYBURG-JACKSON			
LOCATION: 1980' FSL & 660' FWL, SEC 29-T17S-R31E			COUNTY: EDDY COUNTY			STATE: NM
ELEVATION: GL=3673'; KB=UNK			SPUD DATE: 09/21/59		COMP DATE: 10/30/59	
API#: 30-015-05451		PREPARED BY: C.H. CARLETON				DATE: 10/25/99
	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 570'	8 5/8"	24#	J-55		10"
CASING:	577' - 3576'	5"	11.5#	J-55		7 7/8"
CASING:						
TUBING:						
TUBING:						



CURRENT

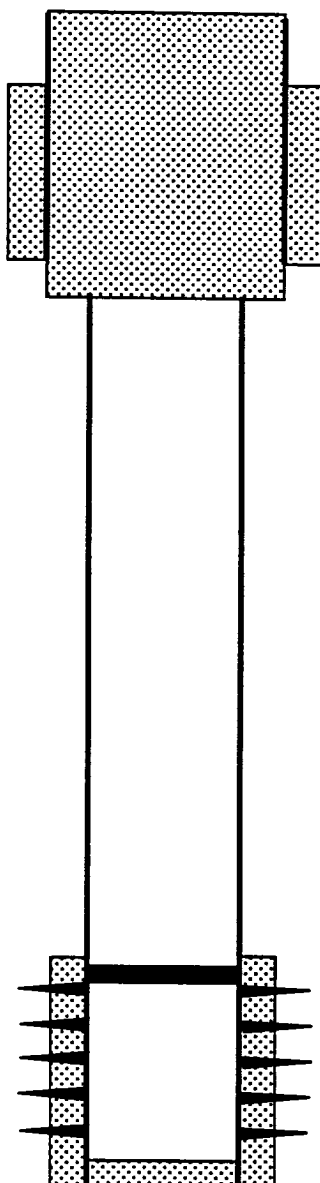

PROPOSED

OPERATOR: DEVON ENERGY CORPORATION (NEVADA)

CEMENT PLUG: 0' - 632'

8 5/8" CASING @ 570' W/100 SXS. TOC @ 100' (calculated)

NOTE:

1. PULLED 577' OF 5" CASING PRIOR TO PUMPING CEMENT PLUG.
2. THE 5" CASING COLLAPSED AT 577', UNABLE TO WORK TOOLS BELOW TIGHT SPOT.

DETAIL OF PERFORATIONS

GRAYBURG: 3054', 55', 57', 59', 70', 76', 82', 90'

U.GRAYBURG: 3095', 3103', 10', 21', 33'

M.GRAYBURG: 3146', 47', 62', 77'

LOCO HILLS: 3203', 04', 20', 22', 26', 38', 47'

METEX: 3274', 76', 99'

L.GRAYBURG: 3337', 53', 59', 66', 73'

PREMIER: 3385', 3388'-3405' (4 SPF), 3411', 12', 16', 3426'-40' (1 SPF)
3450', 61', 62', 84', 86', 88', 90'

VACUUM: 3497', 99', 3506', 08', 10', 28', 30', 32', 37', 40', 42', 44',
53', 55', 57'

CIBP @ 3030'

PERFORATIONS: 3054' - 3557'(OA) - 140 HOLES

PBTD @ 3572'

5" CASING @ 3576' W/100 SXS. TOC @ 3025' (CBL)

TD @ 3576'

NOTE: FOR CALCULATED CEMENT TOPS A YIELD OF 1.32 CU FT/SX AND 50% FILLUP WERE ASSUMED.