


N.

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

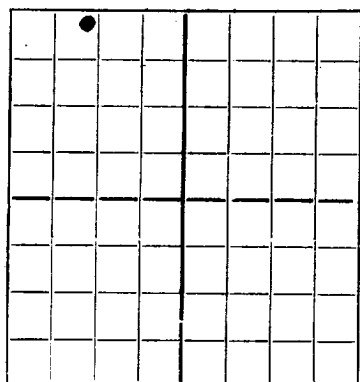

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES  
LOCATE WELL CORRECTLY

**Schuster & Schuster - First Nat'l Bank Bldg., El Paso, Texas - Las Cruces 008015 -**

Well No. **88** in **Sec. 20** of **T. 19N.**, **R. 51E.**, N. M. P. M., **El Paso** Field, **El Paso** County.  
Well is **330** feet south of the North line and **2070** feet west of the East line of **Sec. 20**  
If State land the oil and gas lease is No. \_\_\_\_\_ Assignment No. \_\_\_\_\_  
If patented land the owner is \_\_\_\_\_ Address \_\_\_\_\_  
If Government land the permittee is \_\_\_\_\_ Address \_\_\_\_\_  
The Lessee is **Schuster & Schuster, First Nat'l Bk. Bldg., El Paso, Texas**  
Drilling commenced **2/6/47** 19\_\_\_\_ Drilling was completed **2/26/47** 19\_\_\_\_  
Name of drilling contractor **Kearney & Co.,** Address **Artesia, N.M.**  
Elevation above sea level at top of casing \_\_\_\_\_ feet.  
The information given is to be kept confidential until \_\_\_\_\_ 19\_\_\_\_

## OIL SANDS OR ZONES

No. 1, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **175'** to **100'** feet. \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_  
No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	PERFORATED TO	PURPOSE

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

## PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_  
Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment \_\_\_\_\_

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet.  
Cable tools were used from **0** feet to **420** feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet.

## PRODUCTION

Put to producing \_\_\_\_\_ 19\_\_\_\_  
The production of the first 24 hours was \_\_\_\_\_ barrels of fluid of which \_\_\_\_\_ % was oil; \_\_\_\_\_ % emulsion; \_\_\_\_\_ % water; and \_\_\_\_\_ % sediment. Gravity, Be \_\_\_\_\_  
If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
Rock pressure, lbs. per sq. in. \_\_\_\_\_

## EMPLOYEES

**W. M. Vandagriff** Driller **T. A. Hanson** Driller  
**W. P. Keith** Driller \_\_\_\_\_ Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

**Lozo Hills, N.M., December 3, 1961**

Place \_\_\_\_\_ Date \_\_\_\_\_  
Name **Max Enginger**  
Position **Agent**  
Representing **Schuster & Schuster**  
Company or Operator.

Address **403 First National Bank Bldg., El Paso, Texas**

# FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	75	75	Red beds
75	100	25	Red sand
100	175	75	Red beds
175	180	5	Water & boulders
180	245	65	Red beds
245	250	5	Thin shale
250	415	165	Red beds
415	480	65	Anhydrite
Tool lost at 480 ft. and not recovered, rig added 6' south and new hole started.			