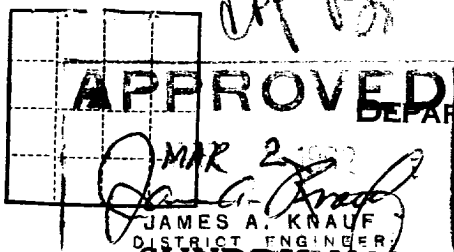


(SUBMIT IN TRIPLICATE)

Land Office Santa FeLease No. SM 02008Unit 1UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS

MAR 6 1962

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	<input type="checkbox"/>
NOTICE OF INTENTION TO CHANGE PLANS	<input type="checkbox"/>	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	<input type="checkbox"/>
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	<input type="checkbox"/>	SUBSEQUENT REPORT OF ALTERING CASING	<input type="checkbox"/>
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	<input type="checkbox"/>	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	<input type="checkbox"/>
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	<input type="checkbox"/>	SUBSEQUENT REPORT OF ABANDONMENT	<input type="checkbox"/>
NOTICE OF INTENTION TO PULL OR ALTER CASING	<input type="checkbox"/>	SUPPLEMENTARY WELL HISTORY	<input type="checkbox"/>
NOTICE OF INTENTION TO ABANDON WELL	<input type="checkbox"/>		<input type="checkbox"/>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Western Development "A-H" Federal

February 28, 1962

Well No. 1 is located 1980 ft. from N line and 1980 ft. from E line of sec. 33

<u>SE NW 33</u> (1/4 Sec. and Sec. No.)	<u>18S</u> (Twp.)	<u>27E</u> (Range)	<u>H.M.P.M.</u> (Meridian)
<u>Wildcat</u> (Field)	<u>Eddy</u> (County or Subdivision)	<u>New Mexico</u> (State)	

The elevation of the derrick floor above sea level is 3365 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudlogging, cementing points, and all other important proposed work)

Plans are to drill with rotary tools to a depth of 4000 feet to test the lower San Andres formation. 8 5/8" surface casing will be run to approximately 1650' and cemented temporarily with a minimum of 100 sacks (1250 to 1650). This will cover aquifer expected 1330-1475. Temperature survey will be made. 11 3/4" csg. will be used if necessary as conductor in event of cave. In event of production, 8 5/8" csg. will be perforated and cement circulated to surface. 5 1/2" casing will be used as production string and cemented according to regulations.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Yates Petroleum CorporationAddress 309 Carper BuildingArtesia, New MexicoBy R.W. Lunderberg Jr.
Title Company Geologist

