


NUMBER OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
TRANSPORTER	OIL
	GAS
PRORATION OFFICE	
OPERATOR	

Santa Fe, New Mexico

WELL RECORD 13 AM 10-25

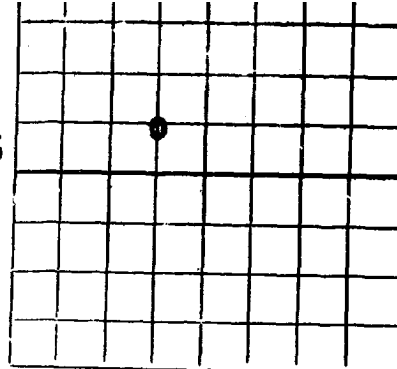

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE If State Land submit 6 Copies

Sunray Oil Company

N. M. State "AJ"

AREA 640 ACRES
LOCATE WELL CORRECTLY

Well No. 1, in SE 1/4 of SW 1/4, of Sec. 29, T. 18 S., R. 23 E., NMPM.

Undesignated

Pool, Eddy

County.

Well is 1650 feet from West line and 1980 feet from North line

of Section 29. If State Land the Oil and Gas Lease No. is E 7872

Drilling Commenced January 30, 1963. Drilling was Completed March 4, 1963

Name of Drilling Contractor Delta Drilling Company

Address P. O. Box 866, Odessa, Texas

Elevation above sea level at Top of sandstone OL 1030. The information given is to be kept confidential until 19.....

OIL SANDS OR ZONES

No. 1, from none to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

MAR 13 1963

D. C. G.
ARTESIA, OFFICE

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8"	48	New	151	Baker	-	-	Surface Casing
8-5/8"	21	New	1802	Baker	-	-	Surface Casing

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/2"	13-3/8"	151	200	Pump		
12-1/4"	8-5/8"	1802	1200	Pump		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

25 ex 7602-7515; 25 ex 5000-4913; 25 ex 1830-1743; 10 ex in surface

Result of Production Stimulation

Depth Cleaned Out

E. LOG OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 7602 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing, 19.

OIL WELL: The production during the first 24 hours was none barrels of liquid of which % was
was oil; % was emulsion; % water; and % was sediment. A.P.I.
Gravity

GAS WELL: The production during the first 24 hours was none M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy	T. Devonian	T. Ojo Alamo
T. Salt	T. Silurian	T. Kirtland-Fruitland
B. Salt	T. Montoya	T. Farmington
T. Yates	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	T. McKee	T. Menefee
T. Queen	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash	T. Mancos
T. San Andres	T. Granite	T. Dakota
T. Glorieta 1331	T. Clearfork 2255	T. Morrison
T. Drinkard	T. Wolfcamp 1476	T. Penn
T. Tubbs 2825	T. Cisco 6092	T. Chester 7535
T. Abo 3423	T. Canyon 6516	
T. Penn	T. X Stream 7033	
T. Miss	T. Atocha 7473	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	74	74	Sand rock	7266	7315	49	lime and shale
74	150	76	Surface rock	7315	7379	64	lime and shale
150	164	14	lime sand rock	7379	7419	40	lime and shale
164	499	335	lime and shale	7419	7462	43	lime and shale
499	1805	1306	no returns	7462	7522	60	lime and shale
1805	1820	15	lime	7522	7529	7	sand and shale
1820	1903	83	lime and shale	7529	7532	3	clean sand
1903	2513	640	lime and shale	7532	7547	15	sand and lime
2513	2716	203	lime and shale	7547	7568	21	shale
2716	2948	202	lime	7568	7602	34	lime
2948	3150	202	lime				
3150	3324	174	lime				
3324	3475	151	lime				
3475	3768	293	lime, dolo., red bed stks				
3768	4008	240	lime				
4008	4555	547	lime				
4555	4882	327	lime and shale				
4882	4970	88	lime and dolo.				
4970	5100	130	lime and shale				
5100	5382	283	lime and shale				
5382	5739	357	lime and dolo.				
5739	6445	706	lime and shale				
6445	7090	645	lime and shale				
7090	7207	117	lime and shale				
7207	7266	59	lime and shale				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.