


(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office **NEW MEXICO**

Lease No. **NM 05525-A**

Unit

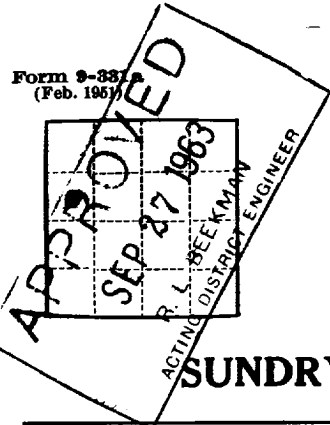

RECEIVED  
SEP 30 1963  
ARTESIA OFFICE

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL		SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL	X		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

**#1 YATES FED. "A"** SEPT. 26, 1963  
Well No. \_\_\_\_\_ is located **2310** ft. from **N** line and **720** ft. from **W** line of sec. **19**  
**SE 1/4 Sec. 19, T. 18S., R. 29E., N.M.P.M.**  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
**LOBO HILLS** **EDDY** **NEW MEXICO**  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is **3522** ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

IT IS PROPOSED TO PLUG AND ABANDON THE CAPTIONED WELL AS FOLLOWS; SETTING THE CEMENT PLUG IN HEAVY MUD:

23 SK. @ 2396-2296'  
23 SK. @ 1400-1900'  
23 SK. @ 670-770' (SK @ 720')  
30 SK. @ 265-365' (TX @ 315')  
15 SK. @ SURFACE

A REGULATION MARKER WILL BE SET AND THE LOCATION CLEANED UP.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **ERNEST A. HANSON**

Address **Box 1515**

**ROSWELL, NEW MEXICO**

By **Harry F. Schram**  
**HARRY F. SCHRAM**  
Title **GEOLOGIST**