

WELL DATA SHEET


LEASE: ASAU WELL NO.: W1-108 FIELD: ATOCA (SAN ANDRES)
 LOCATION: 2310 FEET FROM N LINE, 1850 FEET FROM W LINE. CHEVRON W.I.: 100 %
 SECTION: 12 TOWNSHIP: 18S RANGE: 26E UNIT: F, COUNTY: EDDY STATE: NM

GE: 3292 '
 KB - GE: 10.0 '

7" 23# JSS
 Casing @ 924 '
 w/ 400 sx cmt.
 Circ? YES



BAKER 3S-A MODEL C
 PKR @ 1600'
 EVE 10" PIN & BOX

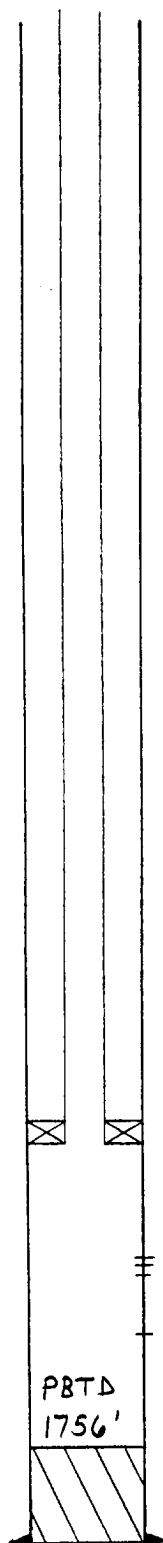

1684'-88'
 1729'

PBTD
 1756'

3 1/2" 9.2# 10.2# JSS
 Casing @ 1794 '
 w/ 300 sx cmt.
 Circ? YES
 TOC @ Surface by _____
 Circ 50 sxs to surface

Initial Completion Data: Date: 4/13/63

PERF'D 1684'-88" w/ 4SPK & 1729" w/ 1 SPK.
 ACID WASHED w/ 200 GAL
 FRAC'D w/ 40000 GAL LEASE CRUDE, 10000 GAL REFINED
 OIL, 4765# SAND, & 108# GLASS BEADS.
 5000 PSI @ 20 BPM 15IP=1300 PSI
 10 MIN=1000 PSI

Initial Prod/Inj: F 40 BO, 35 BW ON 40/64" CHOKE

Subsequent Operations:

FEB 1970 - C/O TO 1756'. DUMPED 500 GAL DIESEL
 DOWN CASING FOLLOWED BY 250 GAL 15% ACID.
 CONVERTED TO INJECTION w/ PKR @
 1600'.

AFTER: 216 BWPD @ 0 PSI

OCT 1972 - RAN TRACER SURVEY
 ALL FLUID LOST TO PERFS

MAR 1982 - ACE w/ 750 GAL 15% NEFE HCL.
 1.75 BPM @ 1200 PSI. 15IP=700 PSI
 10 MIN=450 PSI.
 BEFORE: 0 BWPD
 AFTER: 155 BWPD @ 905 PSI

6-10-83 - Acidized w/ 1500 GAL 20% NEFE w/ 5 GAL
 SOAP + 3% Solvent. I Press - 900# / 48 BPM
 Form brake to 700# / 2 BPM when acid hit.
 Flush 12 bbl FW @ 28 BPM 1600#. 15IP=600#.
 Put back on Injection

8-01 Packer would not unseat, back-off @ safety
 collar. POOH w/ tbg

Packer stuck @ 1600'

Remarks or Additional Data:

1686
 SA
 A 1554
 B 1608
 C 1675
 D 1724
 E 1747
 F 1775

PBD: 1756 '
 TD: 1800 '

Present Prod/Inj: _____
 Last Update: _____