

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE\*  
(Other instructions on reverse side)

Form approved.  
Budget Bureau No. 1004-0135  
Expires August 31, 1985

45F

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☐ OTHER ☐ P&A


2. NAME OF OPERATOR  
Yates Petroleum Corporation

3. ADDRESS OF OPERATOR  
105 South 4th St., Artesia, NM 88210

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface  
1980' FNL & 660' FWL, Sec. 12-T18S-R29E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)  
3510' KB

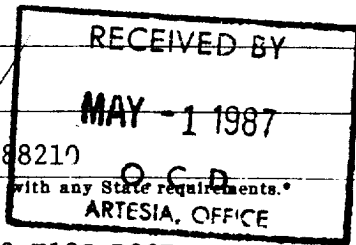

5. LEASE DESIGNATION AND SERIAL NO.  
LC-060904

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME  
West Loco Hills G4S Unit

8. FARM OR LEASE NAME  
Tract 13

9. WELL NO.  
9

10. FIELD AND POOL, OR WILDCAT  
Loco Hills-O-G-SA

11. SEC., T., R., M., OR BLK. AND SURVEY OR ARMA  
Unit E, Sec. 12-18S-29E

12. COUNTY OR PARISH  
Eddy

13. STATE  
NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐ PULL OR ALTER CASING ☐  
FRACTURE TREAT ☐ MULTIPLE COMPLETE ☐  
SHOOT OR ACIDIZE ☐ ABANDON\* ☐  
REPAIR WELL ☐ CHANGE PLANS ☐  
(Other) ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐ REPAIRING WELL ☐  
FRACTURE TREATMENT ☐ ALTERING CASING ☐  
SHOOTING OR ACIDIZING ☐ ABANDONMENT\* ☒  
(Other) ☐

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) \*

Plugged well as follows:

Spot 25 sx cement plug with 2% CaCl at 2598'. Tagged plug at 2240'.  
Spot 5 sx cement plug at 2230'.  
Perforated 4 holes at 1100'. Squeezed holes at 1100' w/65 sx cement w/ 250 psi.  
Tagged at 848'.  
Perforated 4 holes at 393'. Squeezed w/95 sx cement and circulated to surface.  
Spot 10 sx cement plug at 65' and brought cement to surface inside 4-1/2" casing.

Set regulation abandonment marker.  
Plugging completed 2-23-87.



18. I hereby certify that the foregoing is true and correct

SIGNED Gyanta Goodlett TITLE Production Supervisor

DATE 2-24-87

(This space for Federal or State office use)

APPROVED BY sent adams TITLE ARMA MANAGER  
ARTESIA CALIFORNIA RESOURCE AREA

DATE 4-29-87

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

Post ID-2  
5-8-87  
P4A