

RECEIVED

JAN 19 1973

Form C-105
Revised 1-1-65

NO. OF COPIES RECEIVED	5
DISTRIBUTION	
SANTA FE	1
FILE	1 ✓
U.S.G.S.	2
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION
WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5a. Indicate Type of Lease
State ☐ Fee ☒

5. State Oil & Gas Lease No.

1a. TYPE OF WELL

OIL WELL ☒ GAS WELL ☐ DRY ☐ OTHER

b. TYPE OF COMPLETION

NEW WELL ☒ WORK OVER ☐ DEEPEN ☐ PLUG BACK ☐ DIFF. RESVR. ☐ OTHER

2. Name of Operator

Anadarko Production Company ✓

3. Address of Operator

P. O. Box 67, Loco Hills, New Mexico 88255

4. Location of Well

UNIT LETTER L LOCATED 1980 FEET FROM THE South LINE AND 1310 FEET FROMTHE West LINE OF SEC. 9 TWP. 18-S RGE. 29-E NMPM

15. Date Spudded 16. Date T.D. Reached 17. Date Compl. (Ready to Prod.) 18. Elevations (DF, RKB, RT, GR, etc.) 19. Elev. Casinghead

12-22-72

12-29-72

1-4-73

3488 GL

3487'

20. Total Depth

2499'

21. Plug Back T.D.

2493'

22. If Multiple Compl., How Many

23. Intervals Drilled By

Rotary Tools

Cable Tools

0 - 2499'

24. Producing Interval(s), of this completion - Top, Bottom, Name

2450-58 Loco Hills

25. Was Directional Survey Made

No

26. Type Electric and Other Logs Run

GR - Acoustic

27. Was Well Cored

No

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT LB./FT.	DEPTH SET	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
8 5/8"	24#	347'	12 1/4"	150	0
5 1/2"	14#	2498'	7 7/8"	200	0

29. LINER RECORD

SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	SIZE	DEPTH SET	PACKER SET
					2 7/8"	2466'	

31. Perforation Record (Interval, size and number)

2450-58 .45 24

32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED
2450-58	500 Acid, 30,000 Gallon Lease Oil, 35,000# Sand

33. PRODUCTION

Date First Production 1-14-73 Production Method (Flowing, gas lift, pumping - Size and type pump) Pump Well Status (Prod. or Shut-in) Producing

Date of Test 1-16-73 Hours Tested 24 Choke Size 230 Prod'n. For Test Period 220 Oil - Bbl. 0 Gas - MCF 960 Water - Bbl. 37 Gas - Oil Ratio

Flow Tubing Press. 37 Casing Pressure 37 Calculated 24-Hour Rate 37 Oil - Bbl. 37 Gas - MCF 37 Water - Bbl. 37 Oil Gravity - API (Corr.) 37

34. Disposition of Gas (Sold, used for fuel, vented, etc.)

Fuel


Test Witnessed By

35. List of Attachments

Deviation Surveys

36. I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief.

SIGNED

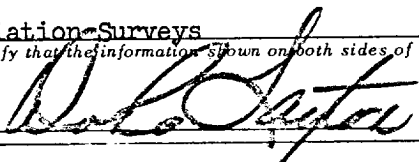

TITLE

Area Supervisor

DATE

January 17, 1973

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Commission not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 30 through 34 shall be reported for each zone. The form is to be filled in quadruplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Northwestern New Mexico

Southeastern New Mexico

T. Canyon	T. Ojo Alamo	T. Penn. "B"
T. Strawn	T. Kirtland-Fruitland	T. Penn. "C"
T. Atoka	T. Pictured Cliffs	T. Penn. "D"
T. Miss	T. Cliff House	T. Leadville
T. Devonian	T. Menefee	T. Madison
T. Silurian	T. Point Lookout	T. Elbert
T. Montoya	T. Mancos	T. McCracken
T. Simpson	T. Gallup	T. Ignacio Qizte
T. McKee	T. Base Greenhorn	T. Granite
T. Ellenburger	T. Dakota	T. T.
T. Blinberry	T. Gr. Wash	T. T.
T. Tubb	T. Granite	T. T.
T. Drinkard	T. Delaware Sand	T. T.
T. Abo	T. Bone Springs	T. T.
T. Wolfcamp	T. Chinle	T. T.
T. Penn.	T. Permian	T. T.
T. Cisco (Bough C)	T. Penn. "A"	T. T.

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	80	80	Sand, Caliche, Red Shale				
80	360	280	Any, Red Shale				
360	780	420	Salt				
780	840	60	Salt & Any				
840	950	110	Any & Sand				
950	1320	370	Sand, Any, Dolo				
1320	1970	650	Dolo, Sand, Any				
1970	2350	380	Sand, Sandy Dolo				
2350	2499	149	Sand, Dolo				