

MERIDIAN OIL
FAF FEDERAL No. 1
SAND TANK (STRAWN)
EDDY CO., NM

1980' FSL & 800' FWL SEC. 4, T18S, R30E
 COMP. DATE 11/11/87 ELEV.: 3857' KB 3839' GL
 KB: 21.5'

CASING DETAIL				
SIZE	WT.	GRD.	CPLG.	DEPTH
5-1/2" 17# K-55	17#	LT&C		0-3108'
5-1/2" 15.5# K-55	15.5#	LT&C		3108-8850'
5-1/2" 17# K-55	17#	LT&C		8850-10350'
5-1/2" 17# N-80	17#	LT&C		10350-11062'

100 sx (304") @ +/- 800'

35 sx (109") @ +/- 1300'

35 sx (109") @ +/- 1489'

35 sx (109") @ +/- 3300'

35 sx (109") @ +/- 3700'

30 sx @ (100") +/- 4950'


30 sx (100") @ +/- 8950'

25 sx (247") @ +/- 8950'

10 ppg gelled brine mud

CIBP @ 10,510' + 35' CIC

CICR @ 10,550', SQUEEZE W/ 60 SX
 let 36' cement on top

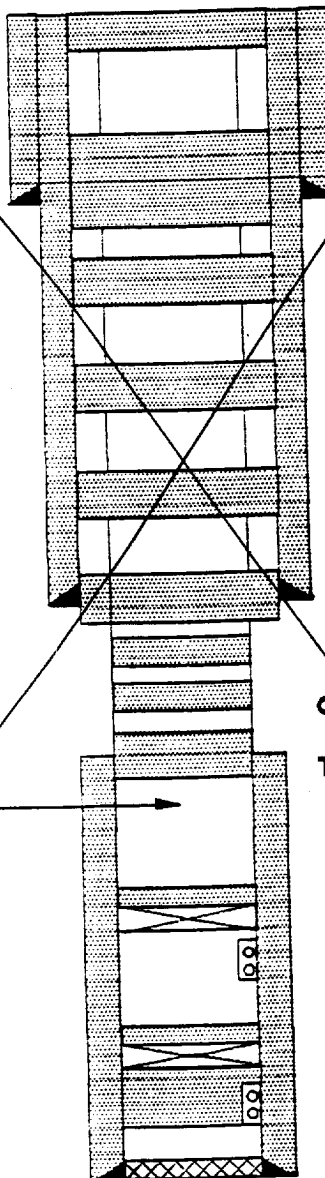

25 sx (76") @ surf.

13-3/8", 54.5#, J-55, STC @ 375'
 CMTD W/ 375 sx, CMT CIRC.
 12.615" ID

*Refer to
 revisions
 on Sundry.*

(SJS)

9-5/8", 38 & 40#, J-55 & N-80, LTC @ 3850'
 CMTD w/ 800 sx, TOC @ 1220' 8.681" ID

9-5/8" 38-47#, K-55 - P110 TIE BACK
 SET @ 1112' W/ 990 SX, TOC @ SURF

Cut & Pull Casing @ +/- 8900'

TOC @ ± 8960' by TS

STRAWN PERFS
 10,554'-98'

ATOKA PERFS
 10,913'-23'

5-1/2", 15.5 & 17#, K-55 & N-80 @ 11,062'
 CMTD W/ 620 SX
 4.892" ID

TD: 12,845'
 PBTD: 10,985'

PROPOSED CONFIGURATION