


	<u>DRILLING</u>	<u>RUNNING CASING</u>
UPPER RAM	DRILL PIPE	CASING
LOWER RAM	BLIND	BLIND

10. GROSS MANIFOLD, BEYOND SECOND VALVE FROM CROSS MAY BE OPTIONALLY POSITIONED OUTSIDE OF SUBSTRUCTURE.
11. EXTENSIONS AND HANG BRIDGES TO BE INSTALLED AND PLACED AT ALL TIMES.
12. TWO INCH (2") LINES AND VALVES ARE PERMITTED ON THE KILL LINE.

NOTE: ALL, UNSERVED VALVES MAY BE
PLUG OR GATE VALVE, RETAIL
TO RETAIL SEAL.

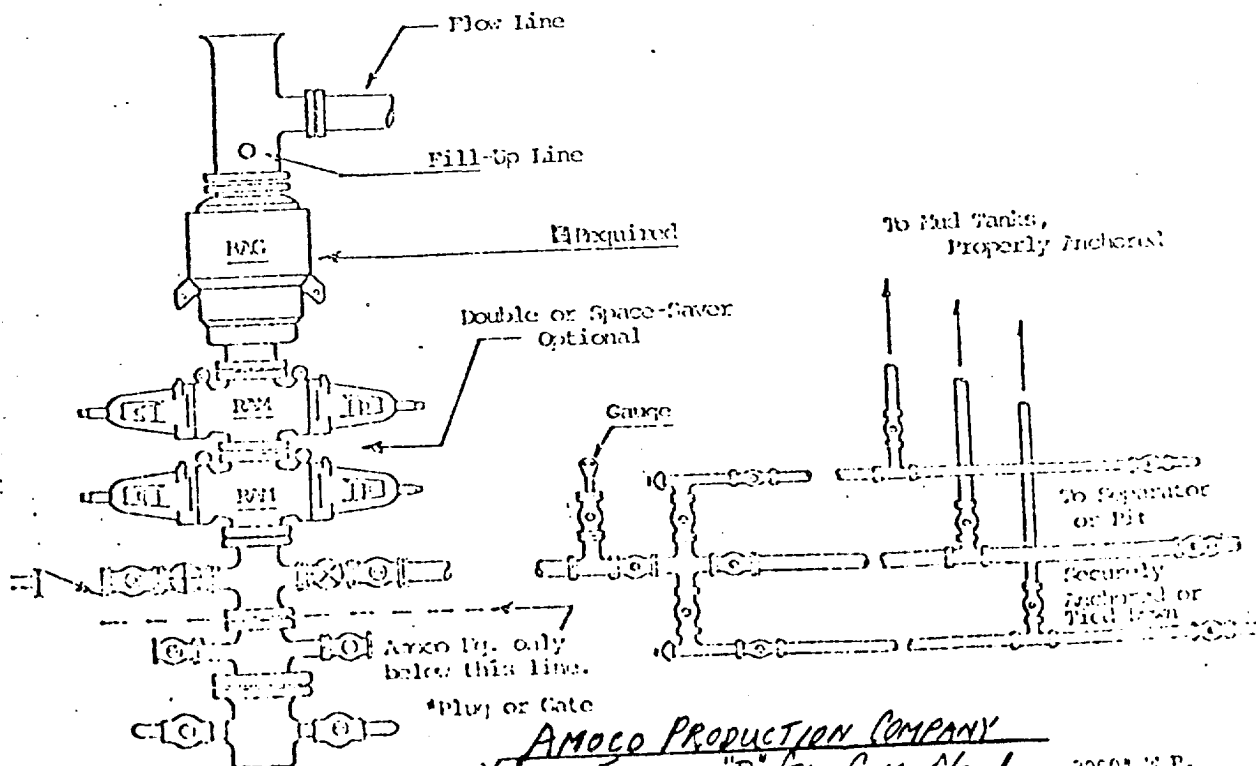

...הוא

AMOCO PRODUCTION COMPANY
YATES FEDERAL "B" GAS COM. No. 1
SEC. 9, T-18-S, R-25-E, Eddy Co., N.M.