


N.M. State AA #1

Elev - 3481.5 GL

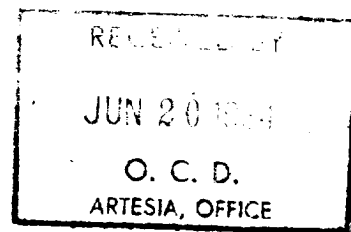

13 3/8" 48# casing to
429'. Cemented with
500 sk. Circ 170 sk.

429'

8 5/8" 28#+24# casing
to 3254'. Cemented with
1000 sk. CTE 775'

3254'

Hole in casing between 6822-7815

← New cement top @ 4000' ±.

← Bone Springs perms from 6416' - 22'

← Cement retainer above hole in casing. So CT
can be brought up to 4000' ±.

← CTE 7900'

← CIBP @ 8630' with 35' cement on top.

← Wolfcamp perms from 8702' - 06'

← CIBP @ 9230' with 35' cement on top

← Penn perms from 9244' - 9402'

← CIBP @ 9490'

← Penn perms from 9538' - 42'

← CIBP @ 9920' with 35' cement on top.

← Strawn perms from 9951' - 73'

← CIBP @ 10500' with 35' cement on top.

← Atoka perms from 10527' - 39'

← CIBP @ 10760' with 35' cement on top.

← Morrow perms from 10794' - 959'

4 1/2" 11.6# casing to
11074'. Cemented with
775 sk. CTE 7900'

11074'

← PBTO @ Casing shoe = 11074'