

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TR. (CATE)*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-02056

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

No. Turkey Track MU Federal

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

North Turkey Track Morrow

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Unit C, Sec. 33-T18S-R29E

12. COUNTY OR PARISH

Eddy

13. STATE

NM

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different formation. Use "APPLICATION FOR PERMIT—" for such proposals.)

RECEIVED

SEP 11 1981

1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

Yates Petroleum Corporation /

3. ADDRESS OF OPERATOR

207 South 4th St., Artesia, NM 88210

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.)
At surface

660 FNL & 1980 FWL, Sec. 33-18S-29E

14. PERMIT NO.

15. ELEVATIONS (Show whether DE, RT, GR, etc.)

3425.8" GR

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) Perforate additional Morrow

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

REPAIRING WELL

ALTERING CASING


ABANDONMENT*

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Set 1.81" standing valve. WIH w/carrier gun on wireline & perforated 11021-11208' w/28 .50" holes (4 SPF). Bled well down, loaded tubing & casing w/2% KCL. Unset packer. WIH w/Guiberson RBP & packer. Set RBP at 11060' & packer at 10996'. Acidized w/2000 gals MS HCL acid, 1000 SCF N2/bbl, 5000 SCF N2 Pad & flush to bottom perforation.

Well making approximately 125 mcf/gpd before perforating & acidizing. After perforating & acidizing well producing average of 750 mcf/gpd.

Well returned to production on 7-21-81.

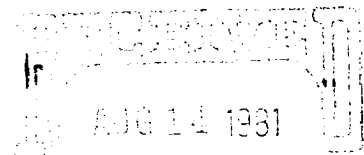

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF

ACCEPTED FOR RECORD

PETER W. CHESTER

SEP 10 1981

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

TITLE Engineering Secretary

DATE 8-13-81

TITLE

DATE

See Instructions on Reverse Side