



April 12, 1993

# GOVERNMENT AM #1


Current Configuration

Elevation: 16.4' KB-GL

660' FSL & 1980' FEL  
Sec 33 T18S R29E  
Eddy Co., New Mexico

## Tubing:

2-7/8", 6.5#, N-80 AB Mod.  
345 jts tbg  
2-7/8" X 2-3/8" XO  
Seal Assy

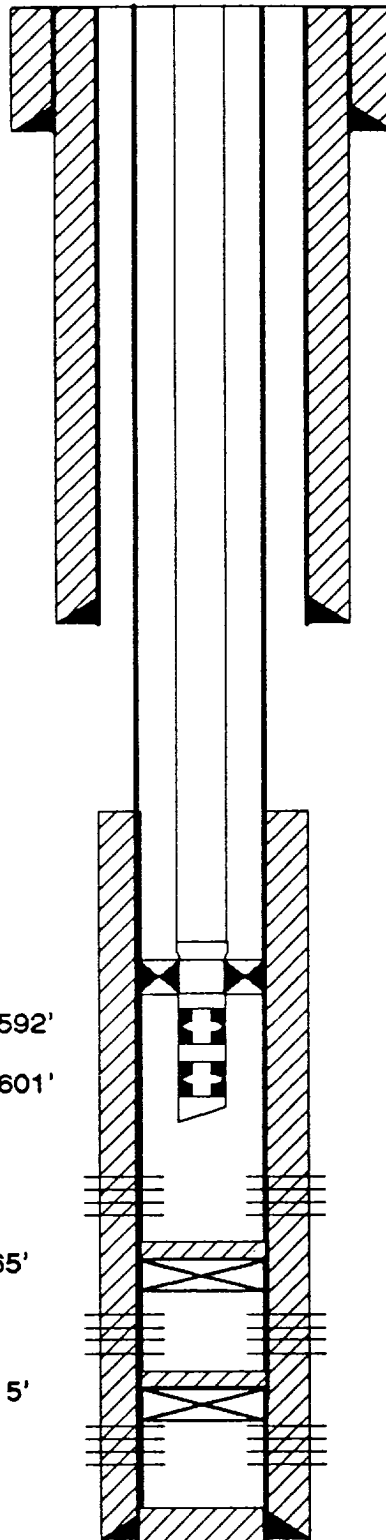

13-3/8", 48#, H-40 STC @ 300'  
Cmt'd w/650 sx - Did not circulate  
Topped-out to surface

8-5/8", 32# & 24#, K-55 ST&C  
Set @ 3015'  
Cmt'd w/1750 sx - Circ. to surface

TOC @ 7100' (Temp Svy)  
TOC @ 6710' (CBL)

Baker Model "DB" @ 10,575'  
2-3/8" tailpipe  
Baker "F" Nipple (1.87") @ 10,592'

Baker "F" Nipple (1.87") @ 10,601'  
EOT @ 10,605'

## Atoka Perfs:

10,675-77' & 10,680' (4 spf)

CIBP @ 11,000' TOC @ 10,965'

## Upper Morrow Perfs:

11,106-72' OA  
CIBP @ 11,250' TOC @ 11,215'

## Lower Morrow Perfs:

11,282-96'

5-1/2", 17# N-80 & 20# K-55 LT&C  
Set @ 11,356'  
Cmt'd w/920 sx

Prepared By: Robert Elliott

TD: 11,365'