

N.M.O.C.D. COPY

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☐ gas ☒ other ☐ JUN 30 1981  
2. NAME OF OPERATOR Alpine Petroleum Corp.  
3. ADDRESS OF OPERATOR Box 10507 Midland, TX 79702  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1980' FNL & 660' FEL Sec 24  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) various

SUBSEQUENT REPORT OF:

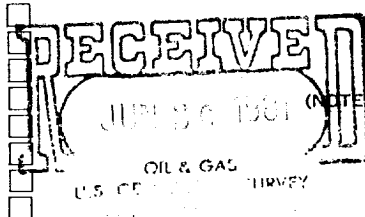

5. LEASE NM-12676  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
7. UNIT AGREEMENT NAME  
8. FARM OR LEASE NAME Froehlich Federal  
9. WELL NO. 1  
10. FIELD OR WILDCAT NAME Undesignated  
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 24, T-18-S, R-21-E  
12. COUNTY OR PARISH Eddy 13. STATE New Mexico  
14. API NO.  
15. ELEVATIONS (SHOW DF, KDB, AND WD) 4073' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

5/22/81 MI RU PU Install tbg head. Ran 3 7/8" mill tooth bit & 67 jts 2 3/8" 4.70# J-55 tbg.  
5/23/81 Drill cmt 4216 - 4460'. Displace w/2% KCl. Spot acid 4442 - 4070'.  
5/24/81 Ran GR/N 4450 O 4400'. SD  
5/27/81 Perforate 4396 - 4266 (28 holes) Ran 2 3/8 tbg. Set @ 4202'KB. Rev. circ. 3 bbls Kcl. Pump down tbg & displ acetic acid w/10 bbls KCl. Form. broke @ 2000#. Displ acid @ 2.7 bpm @ 2600#. ISIP 1500, 10" SIP 1200#. Swab dry in 12 runs. Rec 2 BF w/acid odor. No show. SI  
5/28/81 Swab-rec. 5 gal. fluid; loaded hole. Treat w/2000 gal acid & ball sealers. Max TP 2200#, Min TP 1800#, Avg press. 1800#, ISIP 1500# AIR 4.7 bpm. No ball action. Open to pit. SI  
5/29/81 Bled off pressure. Swab. No recovery. Treat w/15,000 gal KCl water + CO<sub>2</sub> & sand. 2 stages w/ball sealers between. Open to pit

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Roger A. Chapman TITLE Agent DATE 6/23/81

APPROVED BY	ACCEPTED FOR RECORDS (Leave space for Federal or State office use)	TITLE	DATE
CONDITIONS OF APPROVAL, IF ANY:	ROGER A. CHAPMAN		
	JUN 29 1981		
	U.S. GEOLOGICAL SURVEY		
	ROSWELL, NEW MEXICO		

See Instructions on Reverse Side