

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

C/SF
Filed

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☐ other ☒ well2. NAME OF OPERATOR
Anadarko Production Company3. ADDRESS OF OPERATOR
Box 67 Loco Hills, New Mexico 88255

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)


AT SURFACE: 960' FNL & 1130' FEL
AT TOP PROD. INTERVAL: 960' FNL & 1130' FEL
AT TOTAL DEPTH: 960' FNL & 1130' FEL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐FRACTURE TREAT ☐SHOOT OR ACIDIZE ☐REPAIR WELL ☐PULL OR ALTER CASING ☐MULTIPLE COMPLETE ☐CHANGE ZONES ☐ABANDON* ☐(other) Spud, Drill TD, Set csg ☒

SUBSEQUENT REPORT OF:

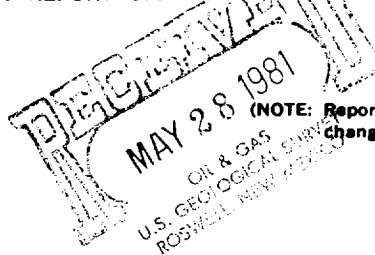

5. LEASE

LC 050906

6. IF INDIAN, ALLOTTEE OR TRIBE NAME RECEIVED

7. UNIT AGREEMENT NAME

Hallard Grayburg
San Andres Unit

JUN 4 1981

8. FARM OR LEASE NAME

Tract 5

O. C. D.

9. WELL NO.

15

ARTESIA, OFFICE

10. FIELD OR WILDCAT NAME

Loco Hills-Queen-Grayburg-San Andres

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

8 - 18S - 29E

12. COUNTY OR PARISH

Eddy

13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

3516.1' GL

ACCEPTED FOR RECORD
ROGER A. CHAPMAN

(NOTE: Report results of multiple completion or zone change on Form 9-331-1 1981)

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. Rigged up rotary tools.
2. Drilled to 390' w/12 1/4" bit, ran 8 5/8" csg w/csg shoe @ 378' KB. Halliburton cemented w/250 sx class H w/2% CaCL. PD @ 11:30 A.M. 4-27-81. Dumped 14 yds. Redimix w/3% CaCL down backside of casing & brought cement to surface. Installed Series 900 Double Ram Hydraulic Blowout Preventor & tested to 600# psi.
3. WOC 19 1/2 hrs prior to drlg. shoe on surface csg w/7 7/8" bit. Encountered water flow @ 1365' (approx. 214 BPH).
NOTE: Notified Geo Stewart about waterflow by telephone. Continued drilling with waterflow decreasing to approx 33 BPH by the time TD (2850') was reached. Attempted to run O.H. Logs.
4. Ran 4 1/2" casing w/csg shoe @ 2847' KB & 7" OD Lynes inflatable OH csg pkr. @ 1338' (in 10 1/4" diam. hole). Waterflow had decreased to 25 BPH. Halliburton cemented w/800 sx Halliburton Lite w/5# Gilsontite/sx, 1# Flocele/sx & 8# salt/sx + tailed in w/350 sx Class H w/5# salt/sx, .5 of 1% CFR-2 & 10# No. 3 sand/sx-Ft.
Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED

George A. Buckles

TITLE Area Supervisor DATE May 26, 1981

ACCEPTED FOR RECORD

(This space for Federal or State office use)

APPROVED BY

ROGER A. CHAPMAN

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

MAY 29 1981

(cont. on page 2)

**UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY**

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☐ other ☐

2. NAME OF OPERATOR

3. ADDRESS OF OPERATOR

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: -
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐

5. LEASE

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

9. WELL NO.

10. FIELD OR WILDCAT NAME

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

12. COUNTY OR PARISH 13. STATE

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

ACCEPTED FOR RECORD
ROGER A. CHAPMAN

(NOTE: Report results of multiple completion or zone change on Form 9-331-C)

JUN 1 1981

U.S. GEOLOGICAL SURVEY
ROSWell, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

PD @ 4:10 PM 5-5-81. Inflated pkr w/2500# psig and then 3200 psig. Cement did not circulate. Flow decreased to 2 BPH. SI braidenhead pressure after 4 hr = 180 psig.

5. Bennett Wireline Co. ran T⁰ Survey & found CT @ 522' KB & PBD @ 2814' KB.

6. Dresser Atlas ran Sonar Log - found high noise levels @ 1517' & 850' (possible waterflow @ 1517' is channeled to surface & causing noise @ 850').

NOTE: Latest waterflow test shows .7 BPH.

NOTE: Plan to perforate @ 1517' KB & cement squeeze. (See accompanying Notice of Intent).

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED *Jimmy E. Huchler* TITLE Area Supervisor DATE May 26, 1981

APPROVED BY ROGER A. CHAPMAN (This space for Federal or State office use)
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____ DATE _____

MAY 29 1981