

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO.	30-015-24403
5. Indicate Type of Lease	STATE ☐ FEE ☒
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name	
Whirlwind WL	
8. Well No.	1
9. Pool name or Wildcat	Undesignated Eddy Group 1
10. Elevation (Show whether DF, RKB, RT, GR, etc.)	
3533' GR	

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:	OIL WELL ☒ GAS WELL ☐ OTHER ☐
2. Name of Operator	YATES PETROLEUM CORPORATION
3. Address of Operator	105 South Fourth Street - Artesia, NM 88210
4. Well Location	Unit Letter M : 660 Feet From The South Line and 660 Feet From The West Line
Section 15	Township 18S Range 25E NMPM Eddy County

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐	REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐	ALTERING CASING ☐
PULL OR ALTER CASING ☐	COMMENCE DRILLING OPNS. ☐
OTHER: ☐	PLUG AND ABANDONMENT ☐
	CASING TEST AND CEMENT JOB ☐
	OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Propose to plug and abandon well as follows:

1. Set CIBP at 2150' and cap with 35' of cement.
2. Perforate 4-1/2" casing at 1220' (50' below 8-5/8" casing shoe).
3. Set cement retainer at 1120'. Sting into retainer and pump 400' cement plug (ray at 820) inside and outside casing.
4. Perforate 4-1/2" casing at 430' (50' below 13-3/8" surface casing shoe).
5. Set cement retainer at 335'. Sting into retainer and pump 100' cement plug inside and outside casing.
6. Spot a 50' surface plug.
7. Install regulation abandonment marker.

NOTE: Please see attached downhole diagram.

NOTIFY OCD-ARTESIA (505-748-1283) 24 HOURS PRIOR TO COMMENCING PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Rusty Klein TITLE Production Clerk DATE Nov. 8, 1995
TYPE OR PRINT NAME Rusty Klein TELEPHONE NO. 505-748-1471

(This space for State Use)


ORIGINAL FILED BY TIM W. GUM
DISTRICT SUPERVISOR

APPROVED BY _____ TITLE _____ DATE NOV 27 1995

NAME: Whirlwind "W1" State #1 FIELD AREA: Alta/Richard/Hook/4-Dikos
 ACTION: 660 FSL, 660 FWL M-15-18s-25e, Eddy, NM
 L: 3533' ZERO: 18' AGL: _____
 KB: 3551' ORIG. DRLG./COMPL. DATE: 3/83
 COMMENTS: _____

CASING PROGRAM:

SIZE/WT./GR./CONN.	DEPTH SE
13 1/8" 48	385'
8 5/8" 24 1195	1170'
4 1/2" 11.6 1155	1731'
10.5 1155	6547'
11.6 1155	6867'
2 3/8"	8157'

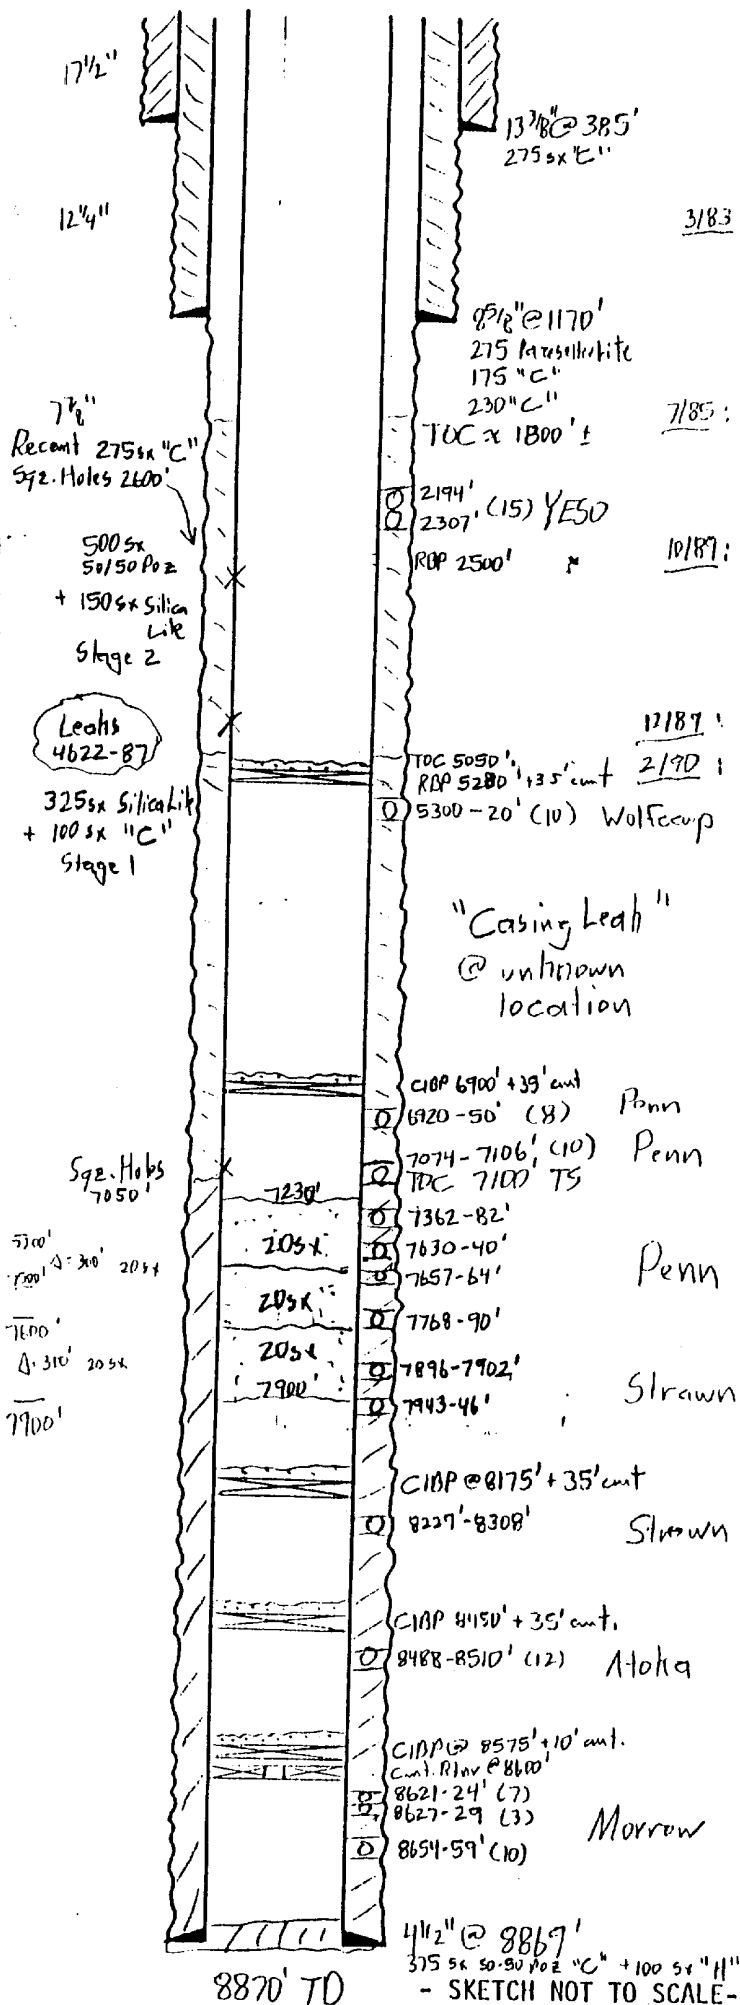

3/83: Perf Morrow 8654-59' (10) Acadz 1500g 7 1/2% MS
 20psi 1/2" chx 600 mcfD
 Set 50 in phr 8636'.
 Perf Morrow 8621-29'. Acadz 1500g 7 1/2%
 Pull all trials. Reven phr and test 8621-59'.
 360psi 1/2" ch x 2336 mcfD.
 Cum 46 mmcf
 7/85: Set plug 880' (Galed). CIBP @ 8575' + 10' ant.
 Perf Alota 8488-90', 8506-10' (12) Acadz 2500g 15%
 265psi 10/64" x 140 mcfD 2793 psi RHP
 10/87: CIBP 8150' + 35' ant.
 Perf Strawn 8229-32', 8237-38', 8253', 8264', 8281', 8289'
 8301-08'. Acadz 2000g 7 1/2%
 Found cng leak above phr 8157' 380m @ 500psi out of
 8 5/8" chg. 85psi 1/8" chh x 34 mcfD. 1600psi DWSITP.
 28413psi BHP
 2/187: 2165 psi BHP
 Strawn cum 0.1 mcfD, 0.1 mmcfD
 4/91 CIBP 8175' + 35' ant
 perf 7896-7902, 7943-46 (22) Strawn
 A/2500 gal 15%
 15" on 4" choke = 42 mcfD.
 perf 7630-7790 (37) Canyon
 A/8700 gal 15%
 would not unload & flow
 6/91 perf 7362-82 (20)
 A/2000 gal 15%
 IPP 9 BOPD 120 BWPB
 9/91 set 20 sx plug 7900'-7734'
 set 40 sx plug 7500'-7230'
 Raise TOC 7050'-1800'
 perf 6920'-7106' (18)
 A/3000 gal
 swab dry
 CIBP @ 6900' + 35' ant
 perf 5300'-20' (10) WC.
 A/1500 gal
 swab dry
 CIBP @ 5280' + 35' ant
 Perf 2194-2307 Yeso
 A/3000 gal 20%
 F/61000 #sand
 unsuccessful
 4/94 last production
 cum 55 BO
 Tops: Alota 8376'
 8020' Strawn
 6840' L. Conv
 Penn Wolfcamp 5278'
 Abo 4188'
 Glorieta 2122'
 S Andrus 816'

REVISED: Brian Collins 7/70